

**CFR 47 FCC PART 15 SUBPART E
ISED RSS-247 Issue 3**

TEST REPORT

For

WIFI+BT Module

MODEL NUMBER: WKCT2FM2501

REPORT NUMBER: 4791095240-1-RF-4

ISSUE DATE: December 22, 2023

**FCC ID:2AC23-WKCT2F
IC:12290A-WKCT2F**

Prepared for

**Hui Zhou Gaoshengda Technology Co.,LTD
No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou
City,Guangdong,China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	December 22, 2023	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
ON TIME AND DUTY CYCLE	ANSI C63.10-2013, Clause 12.2	None; for reporting purposes only.	Pass
6dB AND 26dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	KDB 789033 D02 v02r01 Section C.1	FCC Part 15.407 (a)/(e), RSS-247 Issue 3, Clause 6.2.1.2 RSS-Gen Clause 6.7	Pass
CONDUCTED OUTPUT POWER	KDB 789033 D02 v02r01 Section E.3.a (Method PM)	FCC 15.407 (a) RSS-247 Clause 6.2	Pass
POWER SPECTRAL DENSITY	KDB 789033 D02 v02r01 Section F	FCC 15.407 (a) RSS-247 Clause 6.2	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2.	FCC 15.207 RSS-GEN Clause 8.8	Pass
Radiated Emissions and Band Edge Measurement	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	FCC 15.407 (b) FCC 15.209 FCC 15.205 RSS-247 Clause 6.2 RSS-GEN Clause 8.9	Pass
FREQUENCY STABILITY	ANSI C63.10-2013, Clause 6.8.	FCC 15.407 (g)	Pass
Dynamic Frequency Selection (Slave)	KDB 905462 D03 Client Without DFS New Rules v01r02	FCC Part 15.407 (h), RSS-247 Issue 3 Clause6.3	Pass
Dynamic Frequency Selection (Master)	KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02	FCC Part 15.407 (h), RSS-247 Issue 3 Clause6.3	N/A
Antenna Requirement	N/A	FCC 47 CFR Part 15.203/ 15.407(a)(1) (2), RSS-Gen Issue 5, Clause 6.8	Pass

Note:

1. N/A: In this whole report not applicable.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART E

ISED RSS-247 Issue 3> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>CHANNEL LIST</i>	<i>10</i>
5.3. <i>MAXIMUM POWER</i>	<i>12</i>
5.4. <i>TEST CHANNEL CONFIGURATION</i>	<i>13</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	<i>14</i>
5.6. <i>WORSE CASE CONFIGURATIONS</i>	<i>16</i>
5.7. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>17</i>
5.8. <i>SUPPORT UNITS FOR SYSTEM TEST</i>	<i>18</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED	19
7. ANTENNA PORT TEST RESULTS	22
7.1. <i>ON TIME AND DUTY CYCLE</i>	<i>22</i>
7.2. <i>6DB AND 26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH ...</i>	<i>23</i>
7.3. <i>CONDUCTED OUTPUT POWER</i>	<i>25</i>
7.4. <i>POWER SPECTRAL DENSITY</i>	<i>28</i>
7.5. <i>FREQUENCY STABILITY</i>	<i>30</i>
7.6. <i>DYNAMIC FREQUENCY SELECTION (SLAVE)</i>	<i>32</i>
8. RADIATED TEST RESULTS	36
8.1. <i>RESTRICTED BANDEDGE</i>	<i>45</i>
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~7 GHZ)</i>	<i>92</i>
8.3. <i>SPURIOUS EMISSIONS(7 GHZ~18 GHZ)</i>	<i>118</i>
8.4. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i>	<i>202</i>
8.5. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i>	<i>205</i>
8.6. <i>SPURIOUS EMISSIONS(26 GHZ~40 GHZ)</i>	<i>207</i>
8.7. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ)</i>	<i>209</i>
9. AC POWER LINE CONDUCTED EMISSION	211
10. ANTENNA REQUIREMENT	214

11.	TEST DATA	215
11.1.	<i>APPENDIX A: EMISSION BANDWIDTH.....</i>	<i>215</i>
11.1.1.	Test Result.....	215
11.1.2.	Test Graphs	217
11.2.	<i>APPENDIX B: OCCUPIED CHANNEL BANDWIDTH</i>	<i>242</i>
11.2.1.	Test Result.....	242
11.2.2.	Test Graphs	244
11.3.	<i>APPENDIX C: MIN EMISSION BANDWIDTH.....</i>	<i>269</i>
11.3.1.	Test Result.....	269
11.3.2.	Test Graphs	270
11.4.	<i>APPENDIX D: MAXIMUM CONDUCTED OUTPUT POWER.....</i>	<i>278</i>
11.4.1.	Test Result.....	278
11.4.2.	Test Graphs	281
11.5.	<i>APPENDIX E: MAXIMUM POWER SPECTRAL DENSITY</i>	<i>286</i>
11.5.1.	Test Result.....	286
11.5.2.	Test Graphs	289
11.6.	<i>APPENDIX F: FREQUENCY STABILITY.....</i>	<i>316</i>
11.6.1.	Test Result.....	316
11.7.	<i>APPENDIX G: DUTY CYCLE.....</i>	<i>318</i>
11.7.1.	Test Result.....	318
11.7.2.	Test Graphs	319
11.8.	<i>APPENDIX H: CALIBRATION.....</i>	<i>321</i>
11.9.	<i>APPENDIX I: SHUTDOWN TIME.....</i>	<i>323</i>
11.10.	<i>APPENDIX J: NON-OCCUPANCY</i>	<i>325</i>

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

Manufacturer Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

EUT Information

EUT Name: WIFI+BT Module
Model: WKCT2FM2501
Brand: GSD
Sample Received Date: November 23, 2023
Sample Status: Normal
Sample ID: 6710152
Date of Tested: December 14, 2023 to December 22, 2023

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART E ISED RSS-247 Issue 3	Pass

Prepared By:



Fanny Huang
Engineer Project Associate

Checked By:



Denny Huang
Senior Project Engineer

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART E ISED RSS-247 Issue 3, ANSI C63.10-2013, CFR 47 FCC Part 2, KDB 789033 D02 v02r01, RSS-GEN Issue 5, KDB414788 D01 Radiated Test Site v01, KDB 662911 D01 Multiple Transmitter Output v02r01, KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02, KDB 905462 D03 UNII clients without radar detection New Rules v01r02, KDB 905462 D04 Operational Modes for DFS Testing New Rules v01 and KDB 905462 D06 802 11 Channel Plans New Rules v02.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155</p>
---------------------------	--

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 40 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
	5.37 dB (26 GHz ~ 40 GHz)
Duty Cycle	±0.028%
Emission Bandwidth and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.766 dB
Maximum Power Spectral Density Level	±1.22 dB
Frequency Stability	±2.76%
Dynamic Frequency Selection	±1.01 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	WIFI+BT Module
Model	WKCT2FM2501
Frequency Range:	5180 MHz to 5240 MHz 5260 MHz to 5320 MHz 5500 MHz to 5720 MHz 5745 MHz to 5825 MHz
TPC Function:	Not Support
DFS Operational mode:	Slave without radar detection
Type of Modulation:	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK)
Radio Technology	IEEE 802.11a20 IEEE 802.11n HT20/HT40 IEEE 802.11ac VHT20/VHT40/VHT80
Normal Test Voltage:	3.3 Vdc

5.2. CHANNEL LIST

UNII-1 (For Bandwidth=20MHz)		UNII-1 (For Bandwidth=40MHz)		UNII-1 (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-2A (For Bandwidth=20MHz)		UNII-2A (For Bandwidth=40MHz)		UNII-2A (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

UNII-2C (For Bandwidth=20MHz)		UNII-2C (For Bandwidth=40MHz)		UNII-2C (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	*5610
108	5540	118	*5590	/	/
112	5560	126	*5630		
116	5580	134	5670		
120	*5600	/	/		
124	*5620				
128	*5640				
132	5660				
136	5680				
140	5700				
/	/				

* Note: Not operational in Canada.

UNII-3 (For Bandwidth=20MHz)		UNII-3 (For Bandwidth=40MHz)		UNII-3 (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

Straddle Test Channel Configuration		
Bandwidth	Test Channel Number	Frequency
BW= 20 MHz	CH 144	5720 MHz
BW= 40 MHz	CH 142	5710 MHz
BW= 80 MHz	CH 138	5690 MHz

5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Maximum Average Conducted Power (dBm)
a	5180 ~ 5825	14.89
n HT20		17.61
n HT40		17.75
ac VHT80		16.70

5.4. TEST CHANNEL CONFIGURATION

UNII-1 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11n HT20	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11n HT40	CH 38(Low Channel), CH 46(High Channel)	5190 MHz, 5230 MHz
802.11ac VHT80	CH 42(Low Channel)	5210 MHz

UNII-2A Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 52(Low Channel), CH 56(MID Channel), CH 64(High Channel)	5260 MHz, 5280 MHz, 5320 MHz
802.11n HT20	CH 52(Low Channel), CH 56(MID Channel), CH 64(High Channel)	5260 MHz, 5280 MHz, 5320 MHz
802.11n HT40	CH 54(Low Channel), CH 62(High Channel)	5270 MHz, 5310 MHz
802.11ac VHT80	CH 58(Low Channel)	5290 MHz

UNII-2C Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 100(Low Channel), CH 116(MID Channel), CH 140(High Channel)	5500 MHz, 5580 MHz, 5700 MHz
802.11n HT20	CH 100(Low Channel), CH 116(MID Channel), CH 140(High Channel)	5500 MHz, 5580 MHz, 5700 MHz
802.11n HT40	CH 102(Low Channel), CH 110(MID Channel), CH 134(High Channel)	5510 MHz, 5550 MHz, 5670 MHz
802.11ac VHT80	CH 102(Low Channel), CH 122(High Channel)	5530 MHz, 5610 MHz

UNII-3 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11n HT20	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11n HT40	CH 151(Low Channel), CH 159(High Channel)	5755MHz, 5795MHz
802.11ac VHT80	CH 155(Low Channel)	5775 MHz

Straddle Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 144	5720 MHz
802.11n HT20	CH 144	5720 MHz
802.11n HT40	CH 142	5710 MHz
802.11ac VHT80	CH 138	5690 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter			
Test Software	QA tool		
Mode	Freq(MHz)	Tx power level From QA	
		ANT1	ANT2
802.11a	5180	1E	1C
	5200	20	1C
	5240	1D	1C
	5260	1C	1B
	5280	1C	1B
	5320	1C	1B
	5500	1B	1B
	5580	1C	1B
	5700	1A	1B
	5720-2C	1A	19
	5720-3	1A	19
	5745	1C	1A
	5785	1A	1A
	5825	1A	1A
802.11n 20M	5180	16	
	5200	17	
	5240	15	
	5260	1B	
	5280	1B	
	5320	1B	
	5500	1B	
	5580	1B	
	5700	1A	
	5720-2C	19	
	5720-3	19	
	5745	1A	
	5785	19	
5825	19		
802.11n 40M	5190	1C	
	5230	1B	
	5270	1B	
	5310	1B	
	5510	1B	
	5550	1A	

	5670	1A
	5710-2C	19
	5710-3	19
	5755	19
	5795	19
802.11ac 80M	5210	1B
	5290	1B
	5530	1B
	5610	1C
	5690-2C	1B
	5690-3	1B
	5775	1A

5.6. WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst case Data Rates declared by the customer:

802.11a 20 mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ac VHT20 mode: MCS0
802.11ac VHT40 mode: MCS0
802.11ac VHT80 mode: MCS0

802.11a only support SISO mode.

802.11n HT20/HT40/ac VHT20/VHT40/VHT80 support SISO and MIMO mode.

802.11a SISO mode, Antenna 1 and Antenna 2 has the same power setting, so only Antenna 1 worst case test data were recorded in the report.

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages, so for these 4 modes, only 802.11n HT20 and 802.11n HT40 worst case power modes radiated emission test data are recorded in the report.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 1 and Core 2 correspond to antenna 1 and antenna 2 respectively.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Conducted output power, power spectral density tests separately on each port with all supported SISO & MIMO port combinations.

Conducted bandedge and spurious emissions tests were performed with SISO mode, as this port was found to have the worst case in terms of power settings amongst all supported possible SISO & MIMO port combinations.

Radiated emissions tests were performed with the MIMO modes. These were found to be the worst modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest conducted output power level, it was deemed to be the worst case.

The EUT support Cyclic Shift Diversity(CDD), Space Time Coding(STBC), Spatial Division Multiplexing(SDM) modes. They use the same conducted power per chain in any given mode, so we only chose the worst case mode CDD for final testing.

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna No.	Frequency Band	Antenna Type	Max Antenna Gain (dBi)
1	5150-5850	PIFA antenna	4.01
2	5150-5850	PIFA antenna	3.13

The EUT support Cyclic Shift Diversity(CDD) mode.

MIMO output power port and MIMO PSD port summing were performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 4.01 \text{ dBi}$

G_{ANT} : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 7.02 \text{ dBi}$

Array Gain = $10 \log(N_{ANT}/N_{SS}) \text{ dB}$.

N_{ANT} : number of transmit antennas

N_{SS} : number of spatial streams, The worst case directional gain will occur when $N_{SS} = 1$

IEE Std. 802.11	Transmit and Receive Mode	Description
802.11a	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11n HT20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11n HT40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11ac VHT20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11ac VHT40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11ac VHT80	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
Note: BT&WLAN 2.4G, BT & WLAN 5G, WLAN 2.4G & WLAN 5G can't transmit simultaneously (Declared by client)		

5.8. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	E42-80	R303U5AG
2	AC Adaptor	Lenovo	MACS-1201001202	Input: 100-240 V~50/60 Hz, 0.35 A Output: DC 12V1A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

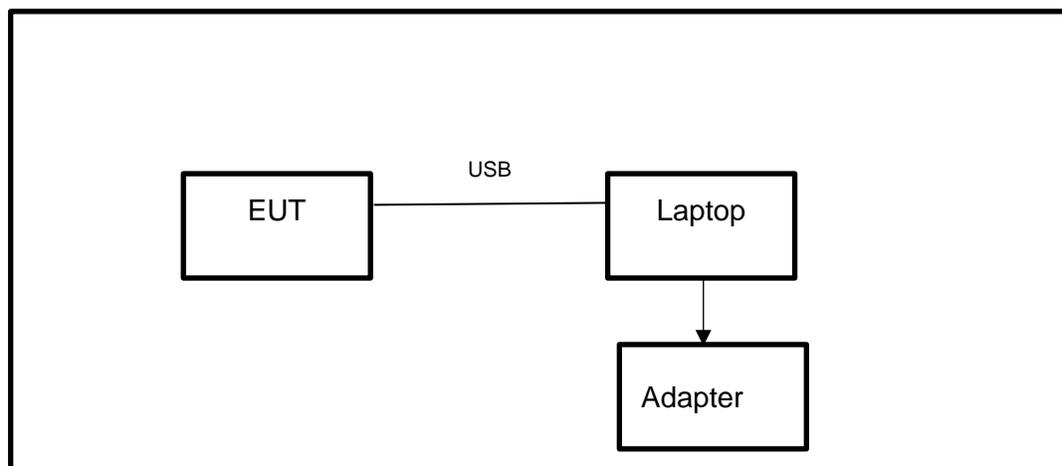

Note: Adapter only use for AC Power Line Conducted Emission testing.

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.31,2023	Mar.30,2024
Vector Signal Generator	R&S	SMBV100A	261637	Oct.12, 2023	Oct.11, 2024
Signal Generator	R&S	SMB100A	178553	Oct.12, 2023	Oct.11, 2024
Signal Analyzer	R&S	FSV40	101118	Oct.12, 2023	Oct.11, 2024
Software					
Description	Manufacturer	Name	Version		
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32	10.60.10		
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.12, 2023	Oct.11, 2024
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.25, 2023	Sep.24, 2024
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.12, 2023	Oct.11, 2024
DC power supply	Keysight	E3642A	MY55159130	Oct.12, 2023	Oct.11, 2024
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Oct.12, 2023	Oct.11, 2024
Attenuator	Aglient	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024
RF Control Unit	Tonscend	JS0806-2	23B80620666	April 18, 2023	April 17, 2024
Software					
Description	Manufacturer	Name	Version		
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System	V3.2.22		

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.13, 2023	Oct.12, 2024
Two-Line V-Network	R&S	ENV216	101983	Oct.13, 2023	Oct.12, 2024
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.13, 2023	Oct.12, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.12, 2023	Oct.11, 2024
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.12, 2023	Oct.11, 2024
EMI Measurement Receiver	R&S	ESR26	101377	Oct.12, 2023	Oct.11, 2024
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.12, 2023	Oct.11, 2024
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.12, 2023	Oct.11, 2024
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.12, 2023	Oct.11, 2024
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.12, 2023	Oct.11, 2024
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.12, 2023	Oct.11, 2024
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV20-5120-5150-5350-5380-60SS	2	Oct.12, 2023	Oct.11, 2024

Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCD5-1879-1879.85-1880.15-1881-40SS	1	Oct.12, 2023	Oct.11, 2024
Notch Filter	Wainwright	WHJ10-882-980-7000-40SS	1	Oct.12, 2023	Oct.11, 2024
Highpass Filter	Xingbo	XBLBQ-GTA68	211115-2-1	Oct.12, 2023	Oct.11, 2024
Notch Filter (5905-6445 MHz)	Xingbo	XBLBQ-DZA175	210922-2-1	Oct.12, 2023	Oct.11, 2024
Notch Filter (6425-6525 MHz)	Xingbo	XBLBQ-DZA176	210922-2-2	Oct.12, 2023	Oct.11, 2024
Notch Filter (6825-7125 MHz)	Xingbo	XBLBQ-DZA177	210922-2-3	Oct.12, 2023	Oct.11, 2024
Notch Filter (6525-6875 MHz)	Xingbo	XBLBQ-DZA178	210922-2-4	Oct.12, 2023	Oct.11, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.21, 2023	Oct.20, 2024
Barometer	Yiyi	Baro	N/A	Oct.19, 2023	Oct.18, 2024
Attenuator	Agilent	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.B.

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW \geq EBW if possible; otherwise, set RBW to the largest available value. Set VBW \geq RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST SETUP

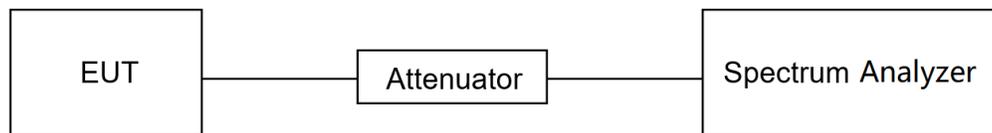

TEST ENVIRONMENT

Temperature	24.1°C	Relative Humidity	52.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

TEST DATE / ENGINEER

Test Date	December 19, 2023	Test By	Walker Yuan
-----------	-------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix G

7.2. 6DB AND 26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15, Subpart E ISED RSS-247 ISSUE 3		
Test Item	Limit	Frequency Range (MHz)
26 dB Emission Bandwidth	For reporting purposes only.	5150 ~ 5250
26 dB Emission Bandwidth	For reporting purposes only.	5250 ~ 5350
26 dB Emission Bandwidth	For reporting purposes only.	5470 ~ 5725 (For FCC) 5470 ~ 5600 (For ISED) 5650 ~ 5725 (For ISED)
6 dB Emission Bandwidth	The minimum 6 dB emission bandwidth shall be 500 kHz.	5725 ~ 5850
99 % Occupied Bandwidth	For reporting purposes only.	5150 ~ 5825 (For ISED)

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.C1. for 26 dB Emission Bandwidth; section II.C2. for 6 dB Emission Bandwidth; section II.D. for 99 % Occupied Bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Emission Bandwidth: RBW=100 kHz For 26 dB Emission bandwidth: approximately 1 % of the EBW. For 99 % Occupied Bandwidth: approximately 1 % ~ 5 % of the OBW.
VBW	For 6 dB Bandwidth: $\geq 3 \times \text{RBW}$ For 26 dB Bandwidth: $> 3 \times \text{RBW}$ For 99 % Bandwidth: $> 3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

- Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6/26 dB relative to the maximum level measured in the fundamental emission.

Calculation for 99 % Bandwidth of UNII-2C and UNII-3 Straddle Channel:

For Example: Fundamental Frequency: 5720 MHz

99 % OBW: 21.00 MHz

Turning Frequency: 5725 MHz

99 % Bandwidth of UNII-2C Band Portion = $(5725 - (5720 - (21.00/2))) = 15.50$ MHz

99 % Bandwidth of UNII-3 Band Portion = $(5720 + (21.00/2) - 5725) = 5.50$ MHz

Calculation for 26 dB Bandwidth of UNII-2C Straddle Channel:

For Example: Fundamental frequency: 5720 MHz

26 dB BW: 20.00 MHz

FL: 5710.16 MHz

FH: 5730.16 MHz

Turning Frequency: 5725 MHz

26 dB Bandwidth of UNII-2C Band Portion = $5725 - 5710.16 = 14.84$ MHz

Calculation for 6dB Bandwidth of UNII-3 Straddle Channel:

For Example: Fundamental frequency: 5720 MHz

6 dB BW: 16.44 MHz


FL: 5711.76 MHz

FH: 5728.2 MHz

Turning Frequency: 5725 MHz

6 dB Bandwidth of UNII-3 band Portion = $5728.2 - 5725 = 3.2$ MHz

TEST SETUP

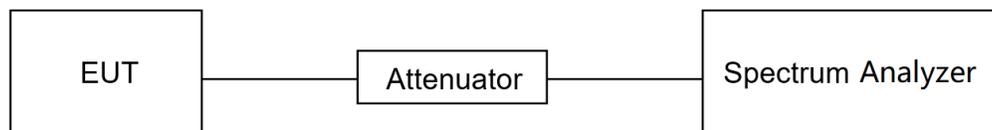

TEST ENVIRONMENT

Temperature	24.1°C	Relative Humidity	52.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

TEST DATE / ENGINEER

Test Date	December 19, 2023	Test By	Walker Yuan
-----------	-------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A&B&C

7.3. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	<input type="checkbox"/> Outdoor Access Point: 1 W (30 dBm) <input type="checkbox"/> Indoor Access Point: 1 W (30 dBm) <input type="checkbox"/> Fixed Point-To-Point Access Points: 1 W (30 dBm) <input checked="" type="checkbox"/> Client Devices: 250 mW (24 dBm)	5150 ~ 5250
	Shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.	5250 ~ 5350 5470 ~ 5725
	Shall not exceed 1 Watt (30 dBm).	5725 ~ 5850

ISED RSS-247 ISSUE 3		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power or e.i.r.p.	The maximum e.i.r.p. shall not exceed 200 mW (23 dBm) or $10 + 10 \log_{10}B$, dBm, whichever power is less. B is the 99 % emission bandwidth in megahertz.	5150 ~ 5250
	a. The maximum conducted output power shall not exceed 250 mW (24 dBm) or $11 + 10 \log_{10}B$ dBm, whichever is less. b. The maximum e.i.r.p. shall not exceed 1.0 W (30 dBm) or $17 + 10 \log_{10}B$ dBm, whichever is less. B is the 99 % emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.	5250 ~ 5350 5470 ~ 5600 5650 ~ 5725
	Shall not exceed 1 Watt (30 dBm). The e.i.r.p. shall not exceed 4 W	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.E.

Method SA-2 (trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction.):

- Measure the duty cycle D of the transmitter output signal.
- Set span to encompass the entire 26 dB EBW or 99% OBW of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.


- (e) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- (f) Sweep time = auto.
- (g) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (h) Do not use sweep triggering. Allow the sweep to “free run.”
- (i) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- j) Compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument’s band power measurement function with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.
- k) Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1 / 0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

Method PM (Measurement using an RF average power meter):

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - a. The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - b. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - c. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25 %).

Note: Method SA-2 was used for straddle channel output power test, and Method PM was used for testing rest channels

TEST SETUP

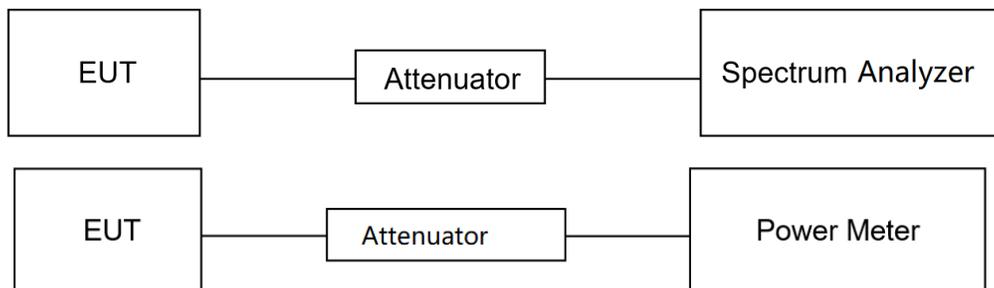

TEST ENVIRONMENT

Temperature	24.1°C	Relative Humidity	52.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

TEST DATE / ENGINEER

Test Date	December 19, 2023	Test By	Walker Yuan
-----------	-------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix D

7.4. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	<input type="checkbox"/> Outdoor Access Point: 17 dBm/MHz <input type="checkbox"/> Indoor Access Point: 17 dBm/MHz <input type="checkbox"/> Fixed Point-To-Point Access Points: 17 dBm/MHz <input checked="" type="checkbox"/> Client Devices: 11 dBm/MHz	5150 ~ 5250
	11 dBm/MHz	5250 ~ 5350 5470 ~ 5725
	30 dBm/500kHz	5725 ~ 5850

ISED RSS-247 ISSUE 3		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.	5150 ~ 5250
	The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.	5250 ~ 5350 5470 ~ 5600 5650 ~ 5725
	30 dBm / 500 kHz	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.F.

Connect the EUT to the spectrum analyzer and use the following settings:

For U-NII-1, U-NII-2A and U-NII-2C band:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	1 MHz
VBW	$\geq 3 \times$ RBW
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto


For U-NII-3:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	500 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

Allow trace to fully stabilize and use the peak search function on the instrument to find the peak of the spectrum and record its value.

Add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum, the result is the Maximum PSD over 1 MHz / 500 kHz reference bandwidth.

TEST SETUP

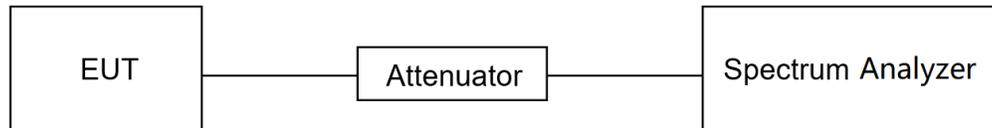

TEST ENVIRONMENT

Temperature	24.1 °C	Relative Humidity	52.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

TEST DATE / ENGINEER

Test Date	December 19, 2023	Test By	Walker Yuan
-----------	-------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E

7.5. FREQUENCY STABILITY

LIMITS

The frequency of the carrier signal shall be maintained within band of operation.

TEST PROCEDURE

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between 0 °C ~ 70 °C (declared by customer).
2. The temperature was incremented by 10 °C intervals and the unit allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Connect the EUT to the spectrum analyzer and use the following settings:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	10 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

4. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at startup, and at 2 minutes, 5minutes, and 10 minutes after the EUT is energized.
5. Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculated the frequency drift.

TEST ENVIRONMENT

	Normal Test Conditions	Extreme Test Conditions
Relative Humidity	20 % ~ 75 %	/
Atmospheric Pressure	100 kPa ~ 102 kPa	/
Temperature	T _N (Normal Temperature): 25.1 °C	T _L (Low Temperature): 0 °C
		T _H (High Temperature): 70 °C
Supply Voltage	V _N (Normal Voltage): DC 3.3 V	V _L (Low Voltage): DC 2.805 V
		V _H (High Voltage): DC 3.795 V

TEST SETUP

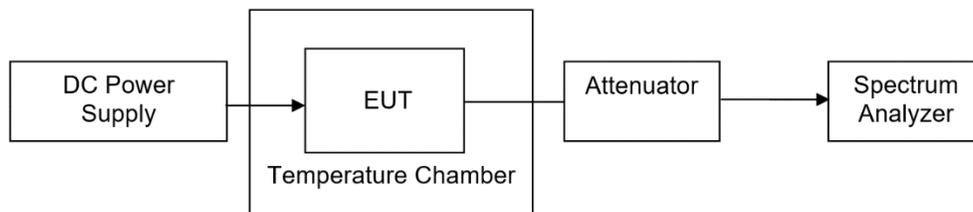

TEST ENVIRONMENT

Temperature	24.1°C	Relative Humidity	52.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

TEST DATE / ENGINEER

Test Date	December 19, 2023	Test By	Walker Yuan
-----------	-------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix F

7.6. DYNAMIC FREQUENCY SELECTION (SLAVE)

LIMITS

(1) DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP \geq 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.
 Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

(2) DFS Response Requirements

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.
 Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.
 Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

APPLICABILITY OF DFS REQUIREMENTS

A U-NII network will employ a DFS function to detect signals from radar systems and to avoid co-channel operation with these systems. This applies to the 5250-5350 MHz and/or 5470-5725 MHz bands.

Within the context of the operation of the DFS function, a U-NII device will operate in either Master Mode or Client Mode. U-NII devices operating in Client Mode can only operate in a network controlled by a U-NII device operating in Master Mode.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	<input type="checkbox"/> Master	<input checked="" type="checkbox"/> Client Without Radar Detection	<input type="checkbox"/> Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	<input type="checkbox"/> Master Device or Client with Radar Detection	<input checked="" type="checkbox"/> Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	<input type="checkbox"/> Master Device or Client with Radar Detection	<input checked="" type="checkbox"/> Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

PARAMETERS OF RADAR TEST WAVEFORMS


This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A	Roundup $\left\{ \frac{1}{360} \right\}$	60%	30
		Test B			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
<p>Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.</p> <p>Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a</p> <p>Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A</p>					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. Test aggregate is average of the percentage of successful detections of short pulse radar types 1-4.

TEST SETUP

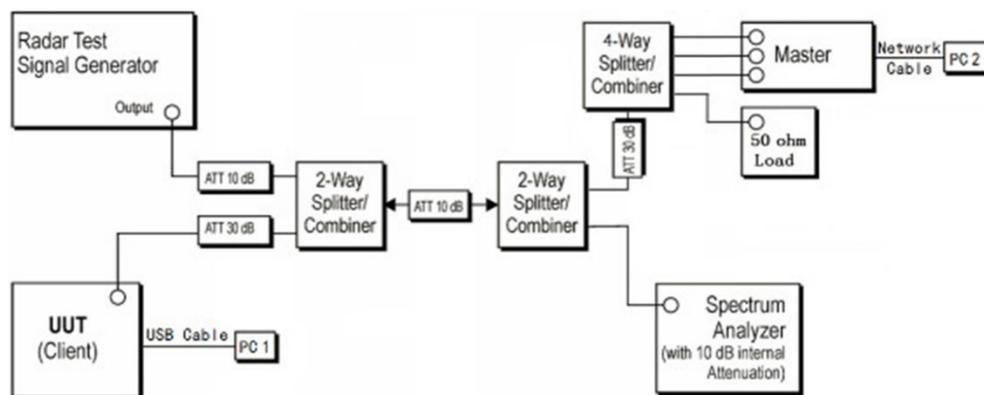

TEST ENVIRONMENT

Temperature	24.1°C	Relative Humidity	52.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

TEST DATE / ENGINEER

Test Date	December 19, 2023	Test By	Walker Yuan
-----------	-------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix H&I&J

8. RADIATED TEST RESULTS

LIMITS

Refer to CFR 47 FCC §15.205, §15.209 and §15.407 (b).

Refer to ISED RSS-GEN Clause 8.9, Clause 8.10 and ISED RSS-247 6.2.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands ^{Note 1}		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.028	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2656 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5480	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

Limits of unwanted/undesirable emission out of the restricted bands refer to CFR 47 FCC §15.407 (b) and ISED RSS-247 6.2.

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1GHz)		
Frequency Range (MHz)	EIRP Limit	Field Strength Limit (dBuV/m) at 3 m
5150~5250 MHz	PK: -27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz		
5470~5725 MHz		
5725~5850 MHz	PK: -27 (dBm/MHz) *1 PK: 10 (dBm/MHz) *2 PK: 15.6 (dBm/MHz) *3 PK: 27 (dBm/MHz) *4	PK: 68.2(dBμV/m) *1 PK: 105.2 (dBμV/m) *2 PK: 110.8(dBμV/m) *3 PK: 122.2 (dBμV/m) *4
Note: *1 beyond 75 MHz or more above of the band edge. *2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. *3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. *4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.		

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made

to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.G.3 ~ II.G.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

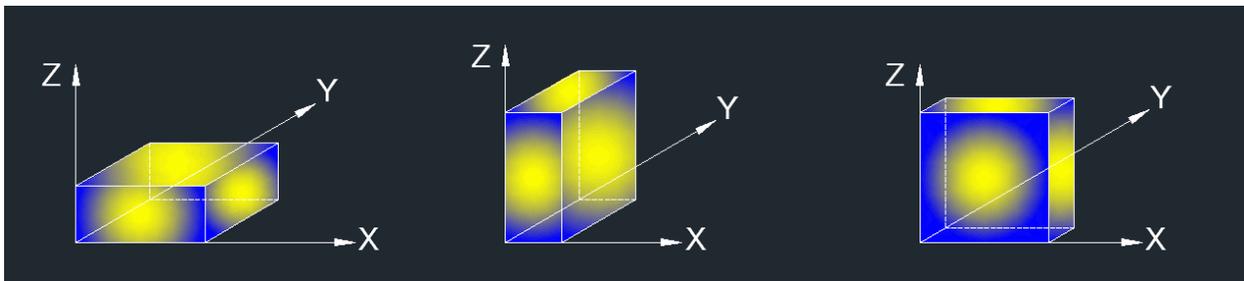

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\text{Log}_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 7 GHz):

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (7 GHz ~ 18 GHz):

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):

Note:


1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (26 GHz ~ 40 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

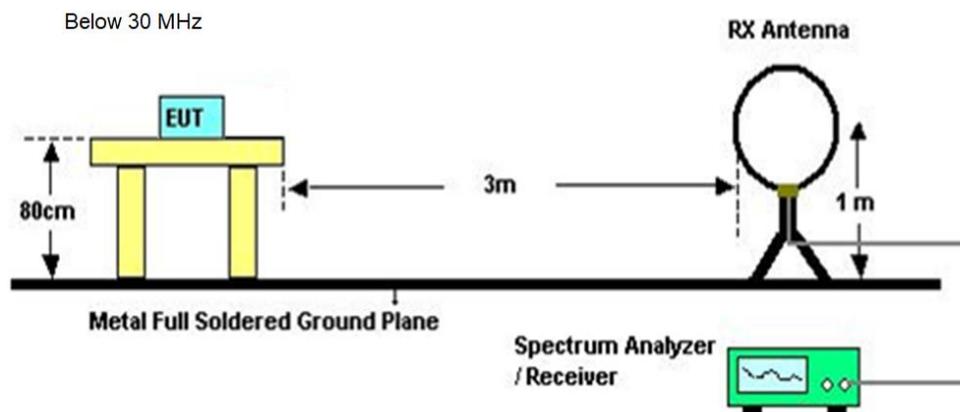

Below 1 GHz and above 30 MHz

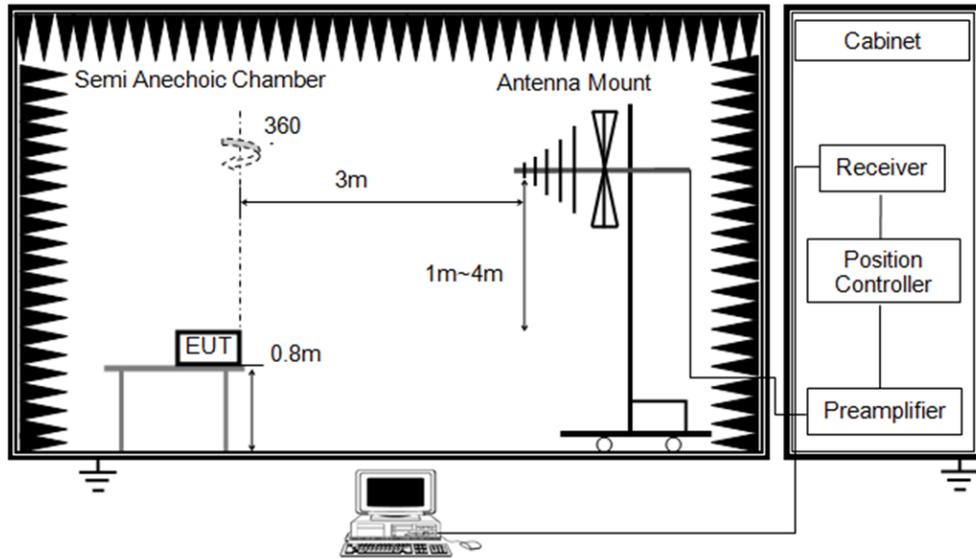

Above 1 GHz

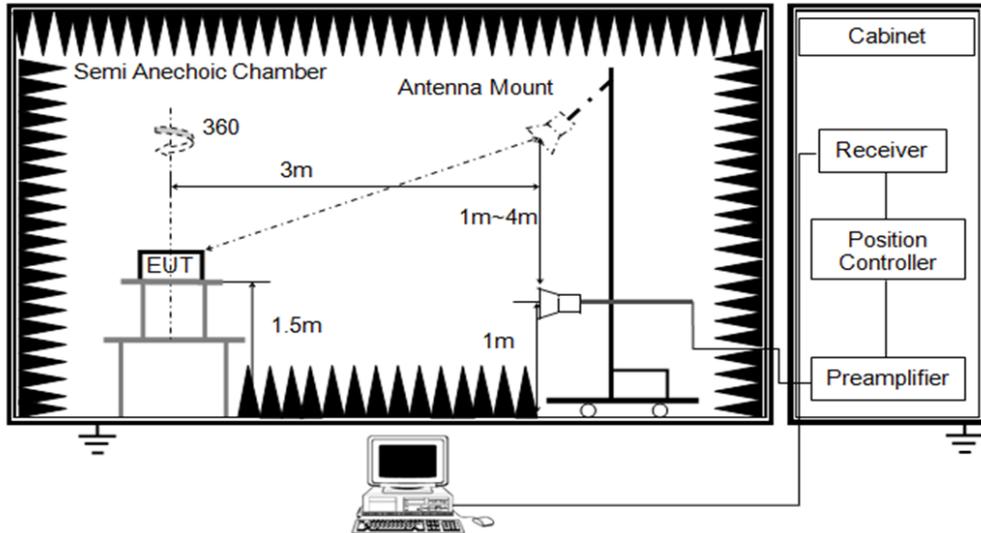

TEST ENVIRONMENT

Temperature	25.3°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3 V


TEST DATE / ENGINEER

Test Date	December 19, 2023	Test By	Rex Huang
-----------	-------------------	---------	-----------

TEST RESULTS


8.1. RESTRICTED BANDEDGE

Test Mode:	802.11a 20 PK	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

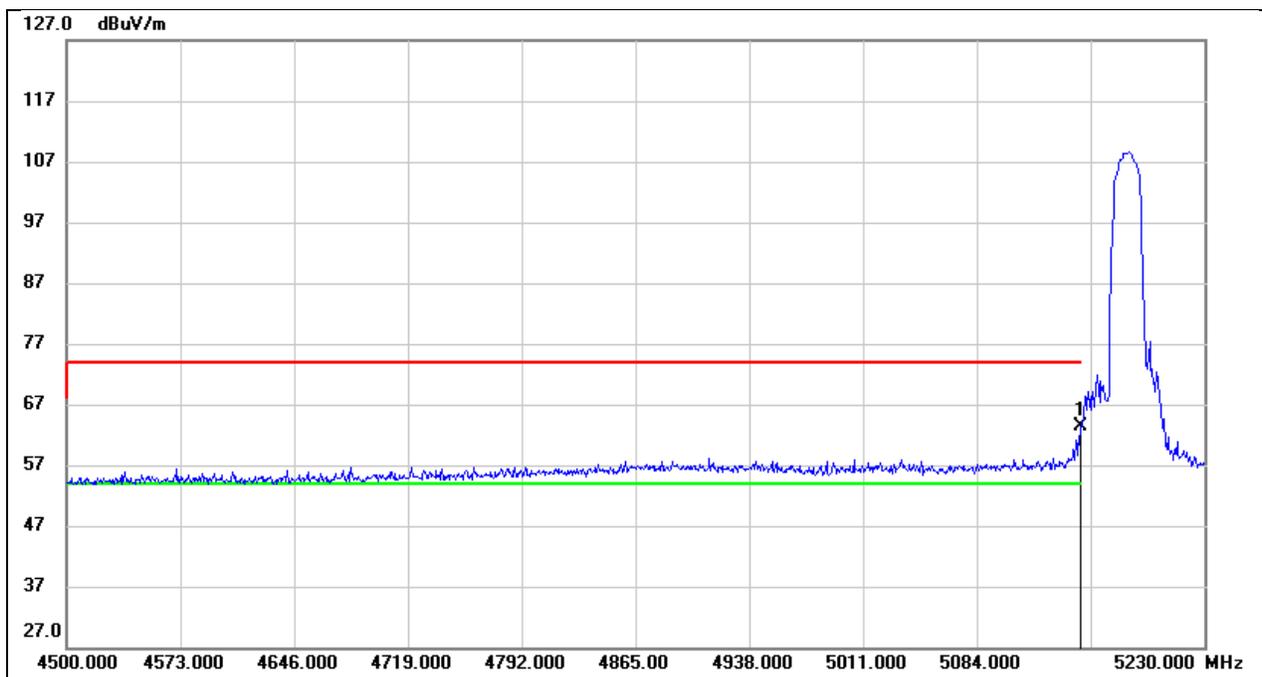


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	23.22	40.27	63.49	74.00	-10.51	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

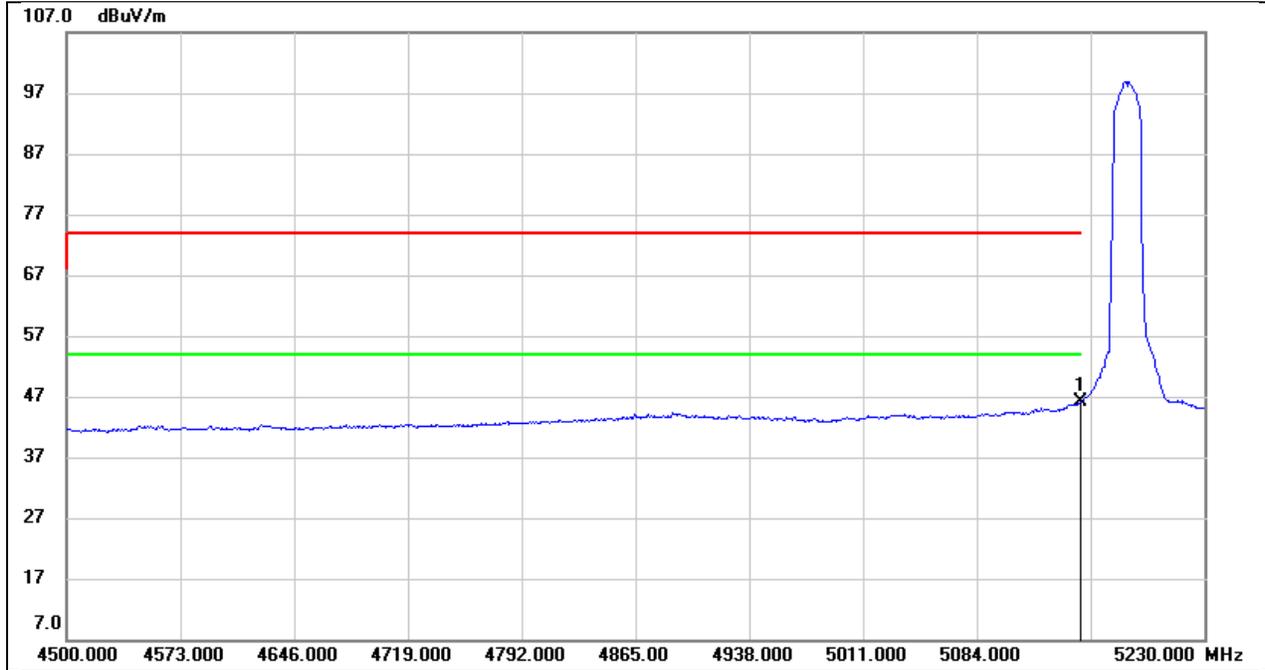


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	5.80	40.27	46.07	54.00	-7.93	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

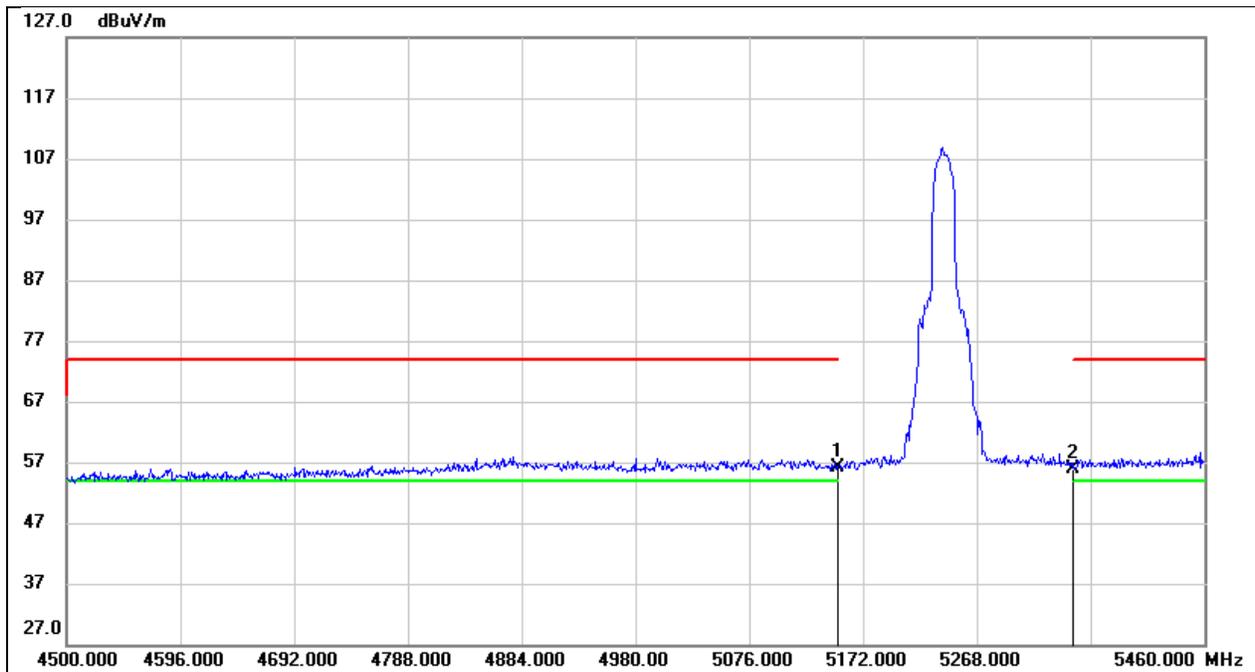


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	15.91	40.27	56.18	74.00	-17.82	peak
2	5350.000	15.50	40.49	55.99	74.00	-18.01	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

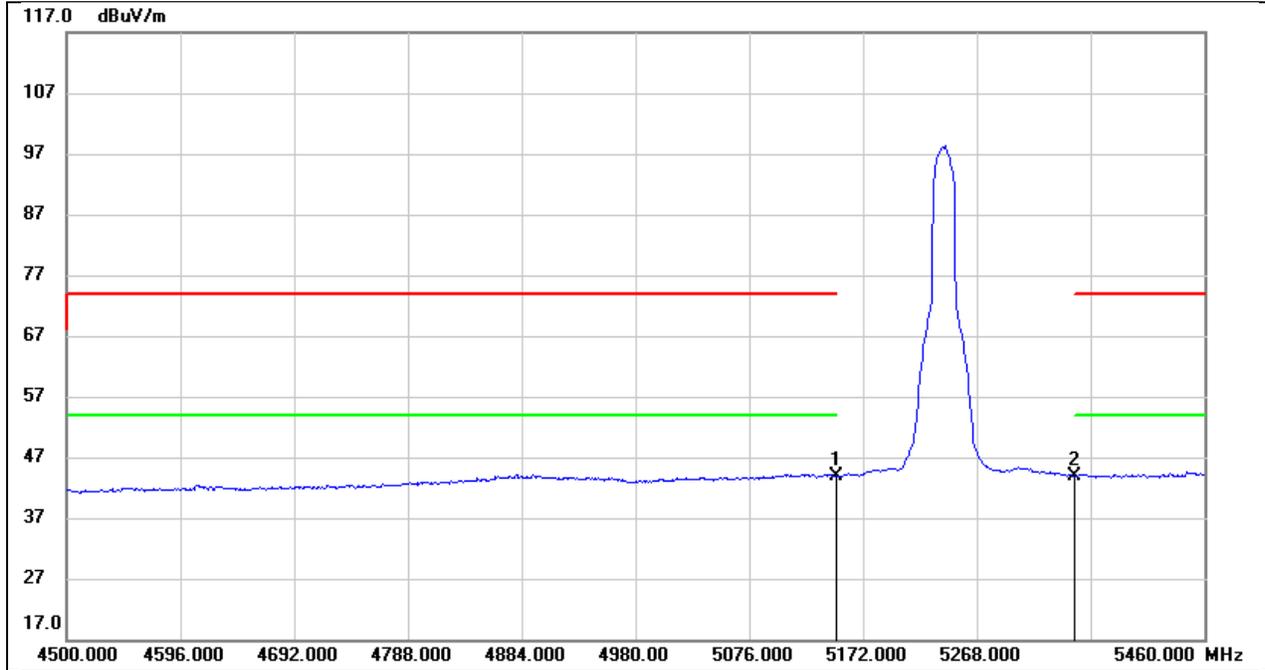


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	3.61	40.27	43.88	54.00	-10.12	AVG
2	5350.000	3.47	40.49	43.96	54.00	-10.04	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

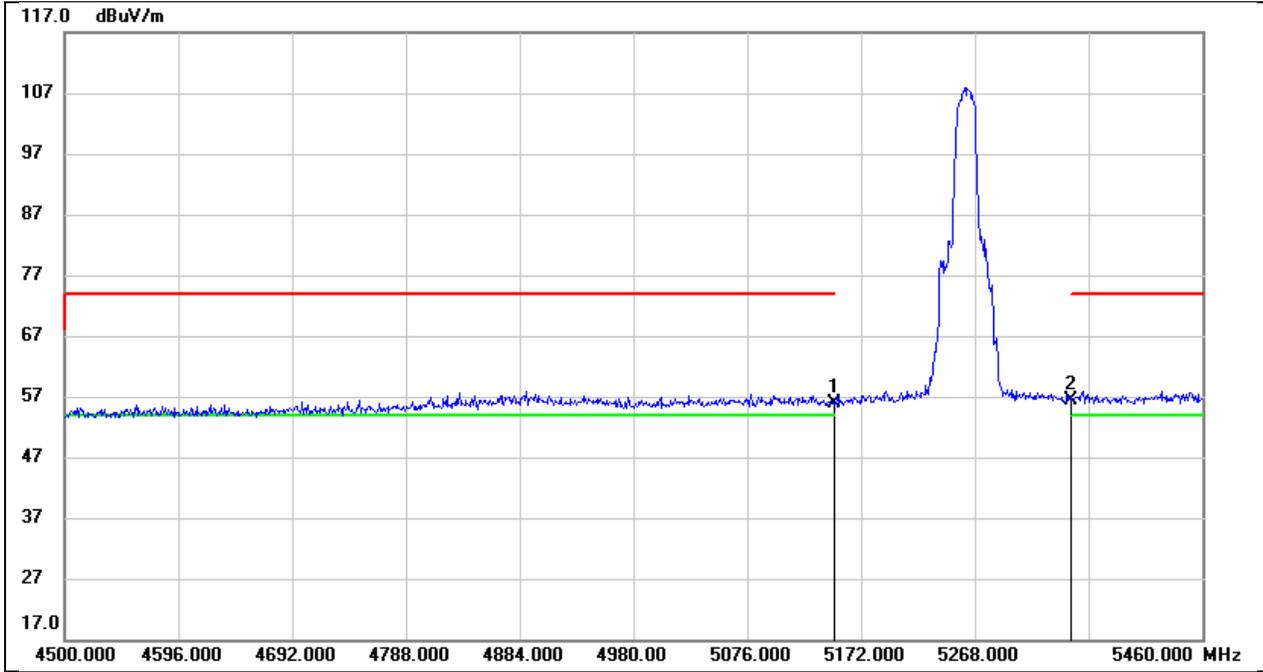


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	15.60	40.27	55.87	74.00	-18.13	peak
2	5350.000	15.89	40.49	56.38	74.00	-17.62	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

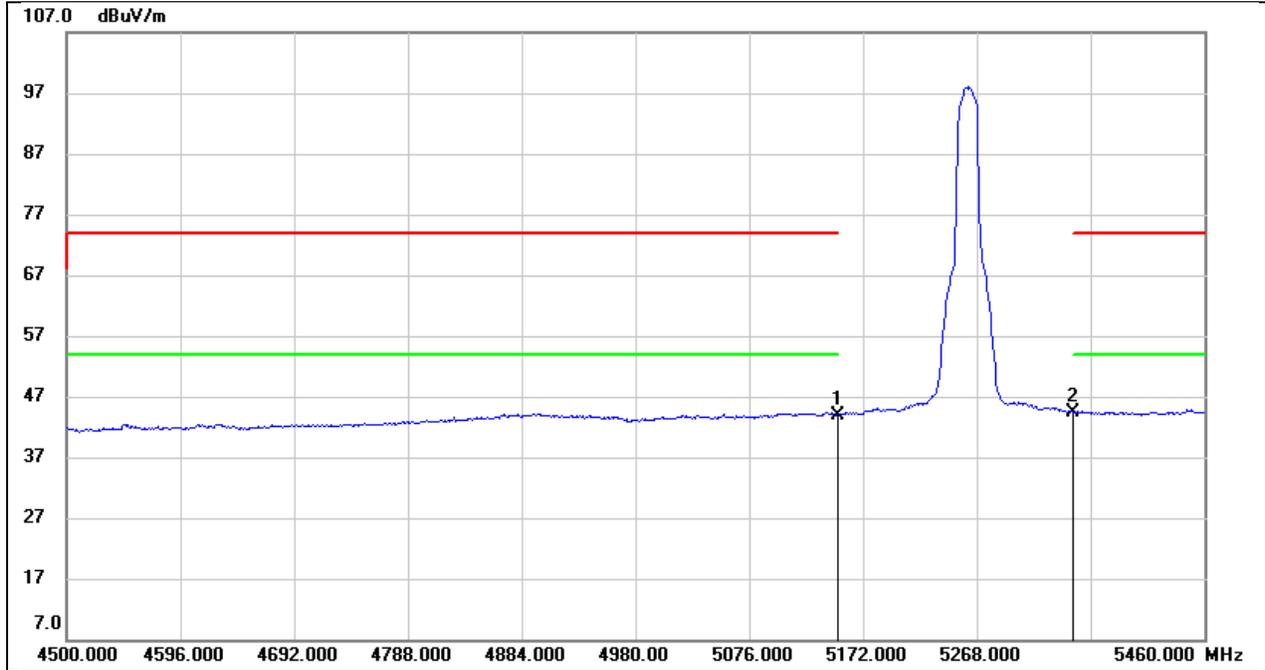


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	3.70	40.27	43.97	54.00	-10.03	AVG
2	5350.000	3.87	40.49	44.36	54.00	-9.64	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

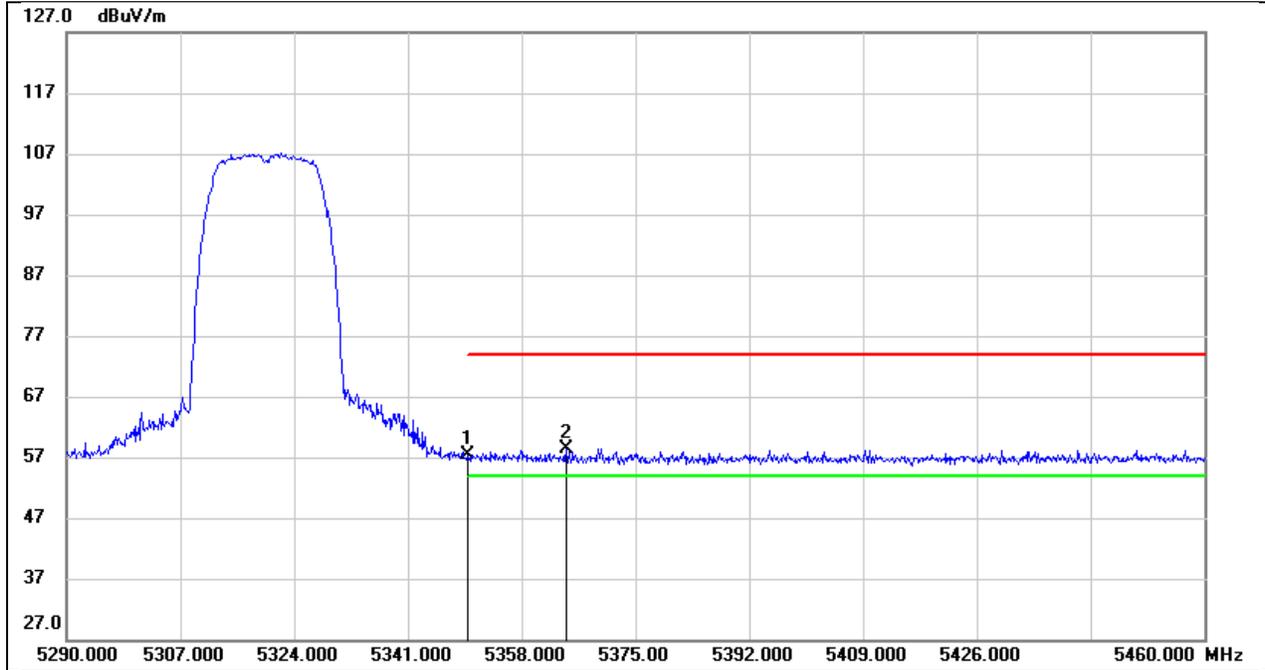


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	16.99	40.49	57.48	74.00	-16.52	peak
2	5364.630	17.86	40.51	58.37	74.00	-15.63	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

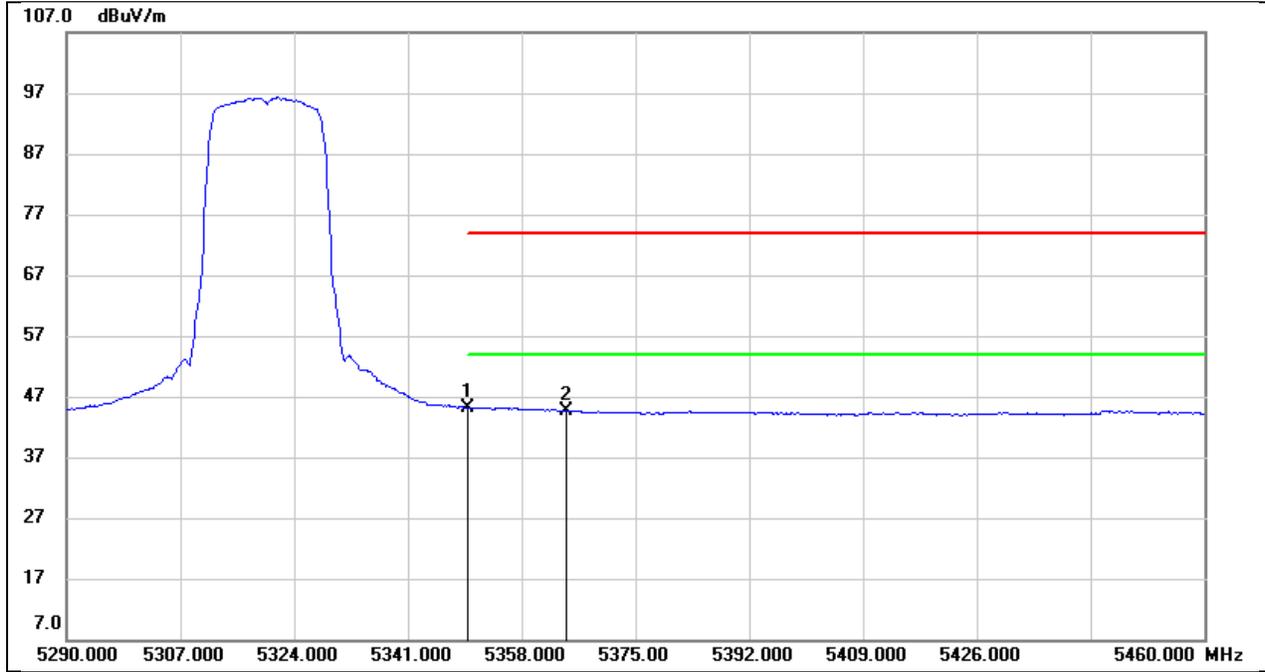


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	4.67	40.49	45.16	54.00	-8.84	AVG
2	5364.630	4.13	40.51	44.64	54.00	-9.36	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

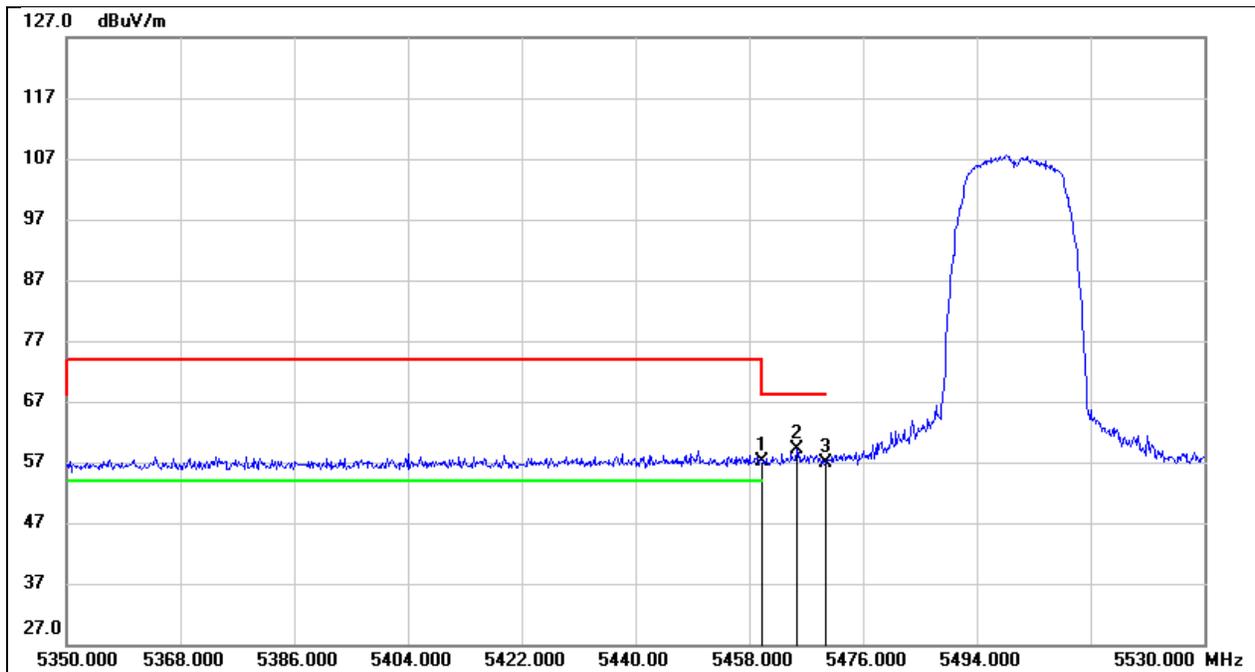


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	16.59	40.62	57.21	74.00	-16.79	peak
2	5465.560	18.39	40.62	59.01	68.20	-9.19	peak
3	5470.000	16.30	40.63	56.93	68.20	-11.27	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

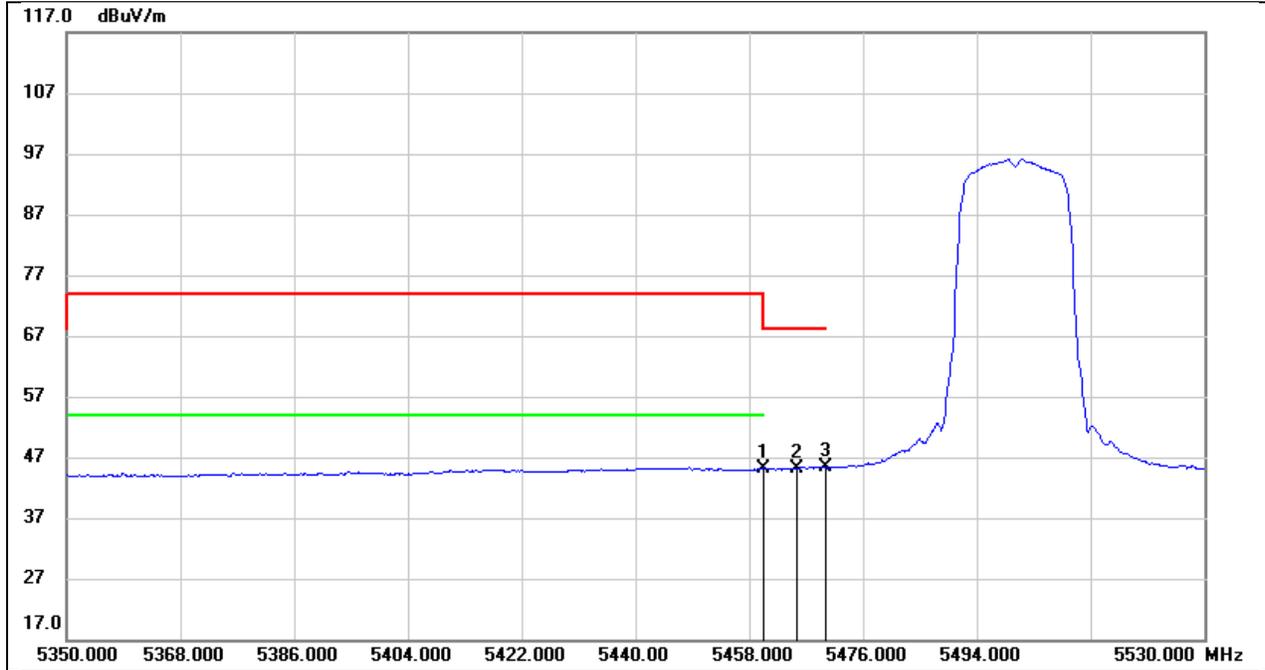


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	4.56	40.62	45.18	54.00	-8.82	AVG
2	5465.560	4.50	40.62	45.12	/	/	AVG
3	5470.000	4.68	40.63	45.31	/	/	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3V

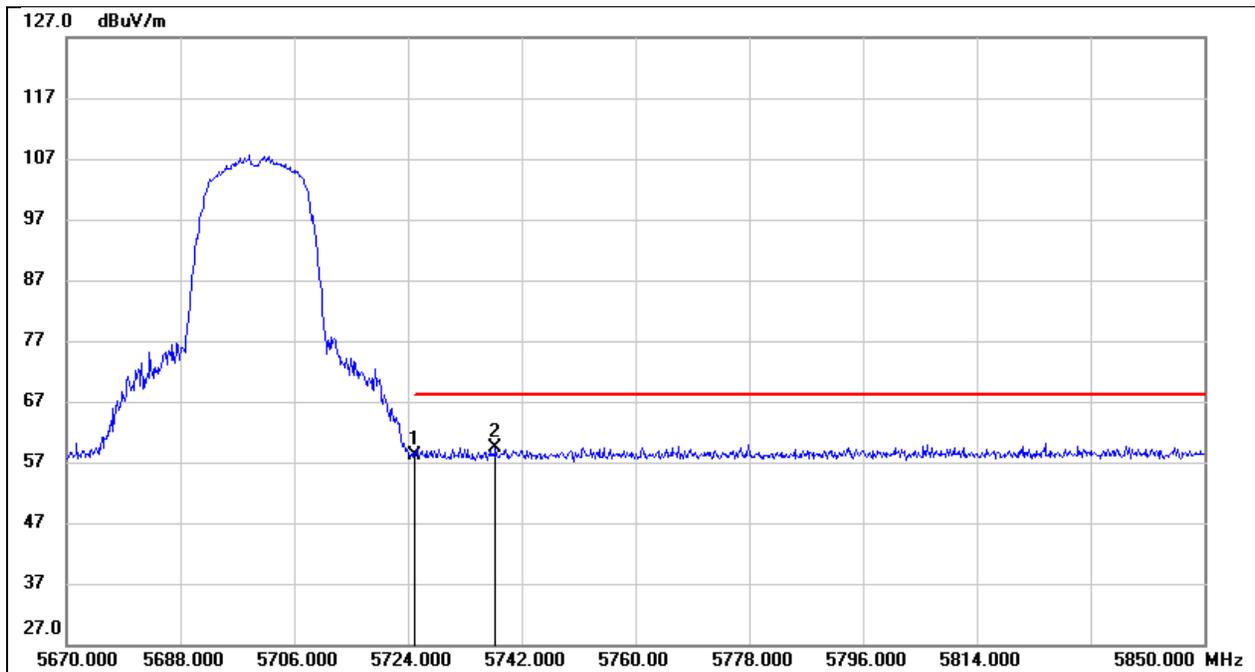


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	16.82	41.27	58.09	68.20	-10.11	peak
2	5737.860	18.14	41.30	59.44	68.20	-8.76	peak

Test Mode:	802.11a 20 PK	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

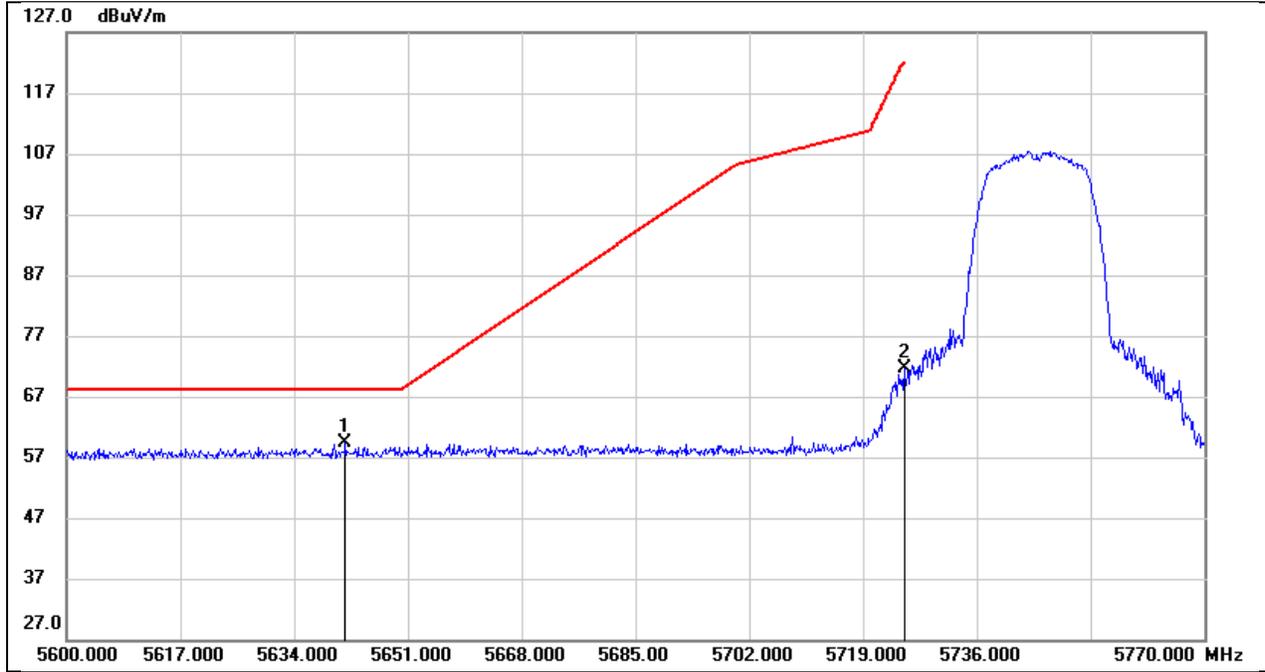


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5641.650	18.46	41.04	59.50	68.20	-8.70	peak
2	5725.000	30.39	41.27	71.66	122.20	-50.54	peak

Test Mode:	802.11a 20 PK	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

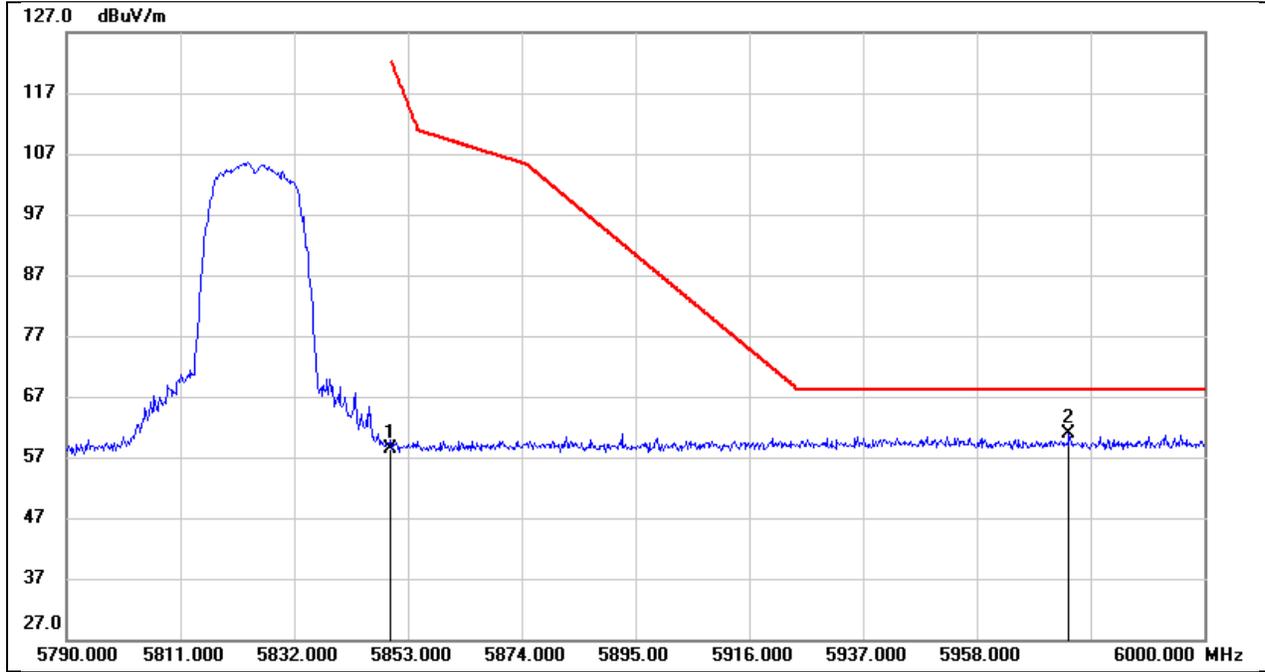


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	16.84	41.60	58.44	122.20	-63.76	peak
2	5975.010	19.00	41.94	60.94	68.20	-7.26	peak

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

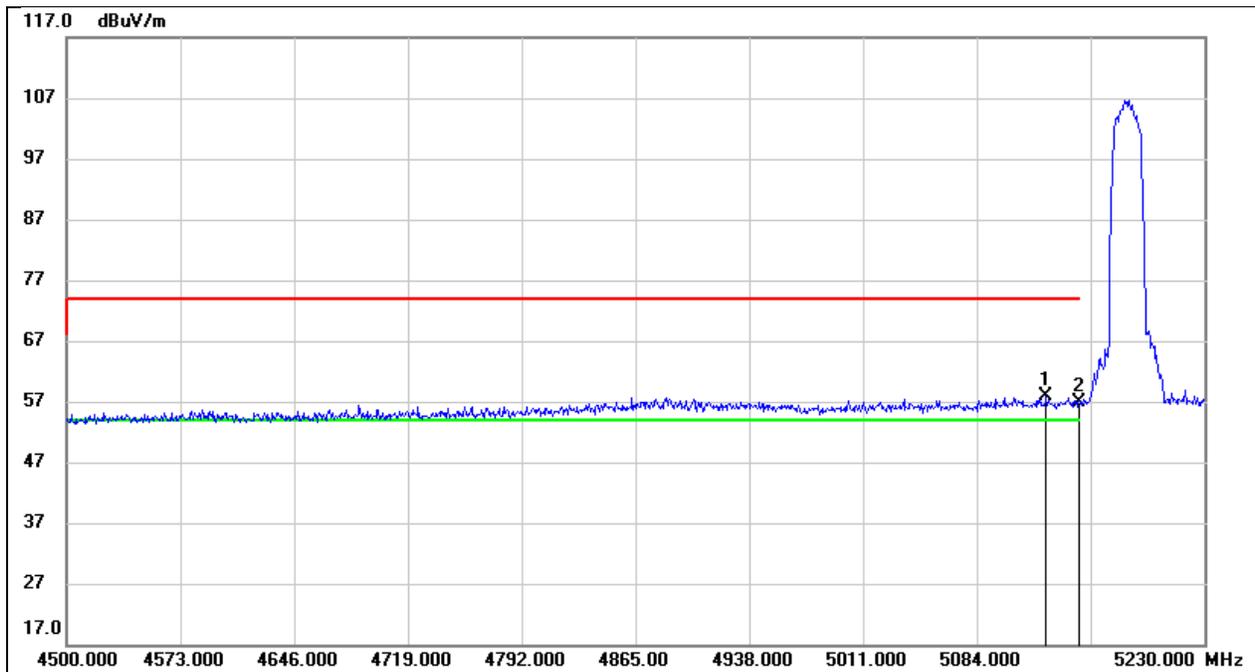


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5128.530	17.65	40.25	57.90	74.00	-16.10	peak
2	5150.000	16.55	40.27	56.82	74.00	-17.18	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

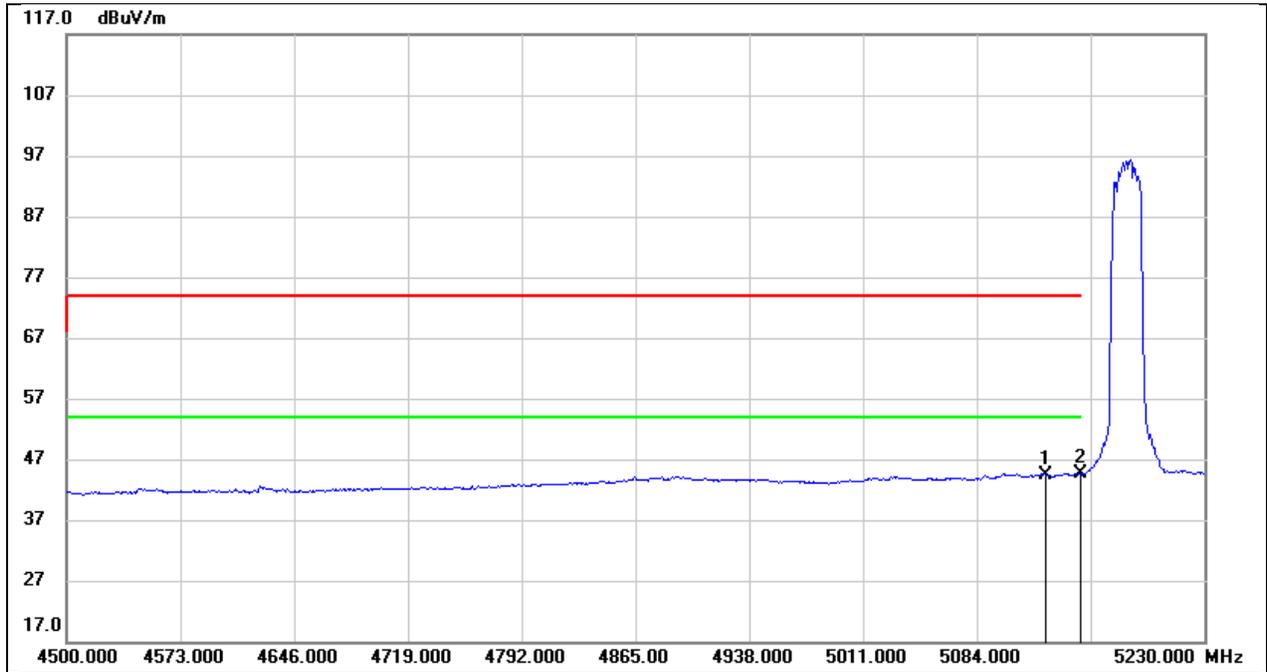


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5128.530	4.19	40.25	44.44	54.00	-9.56	AVG
2	5150.000	4.31	40.27	44.58	54.00	-9.42	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

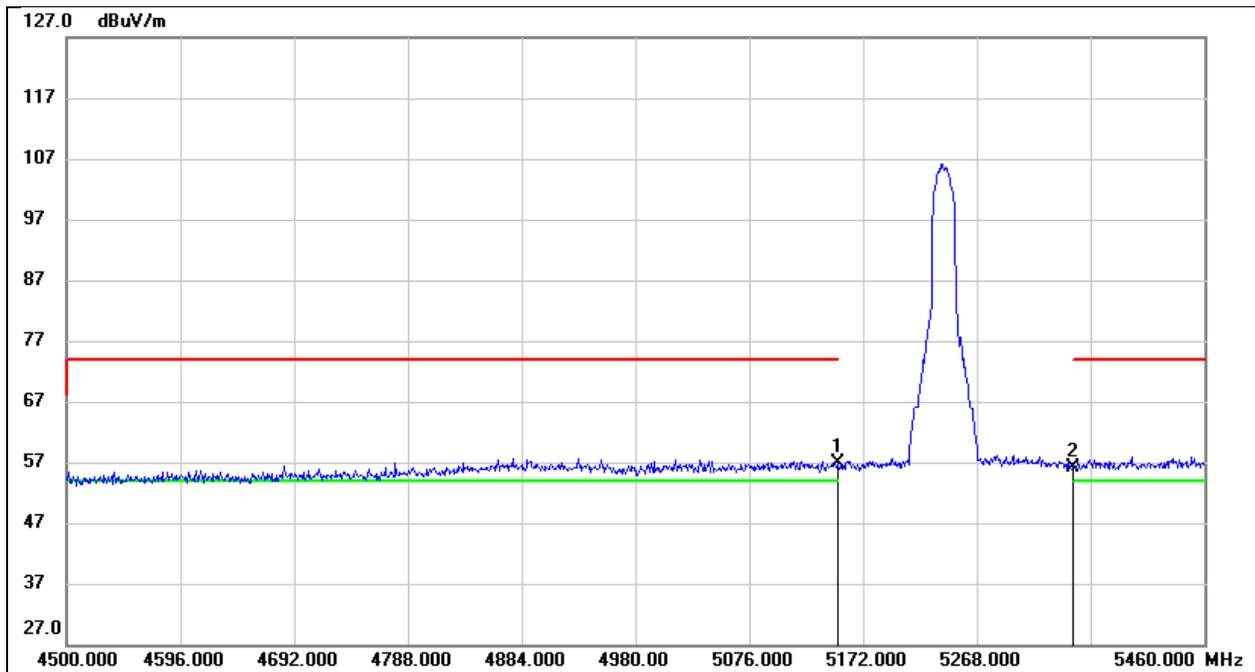


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	16.61	40.27	56.88	74.00	-17.12	peak
2	5350.000	15.55	40.49	56.04	74.00	-17.96	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

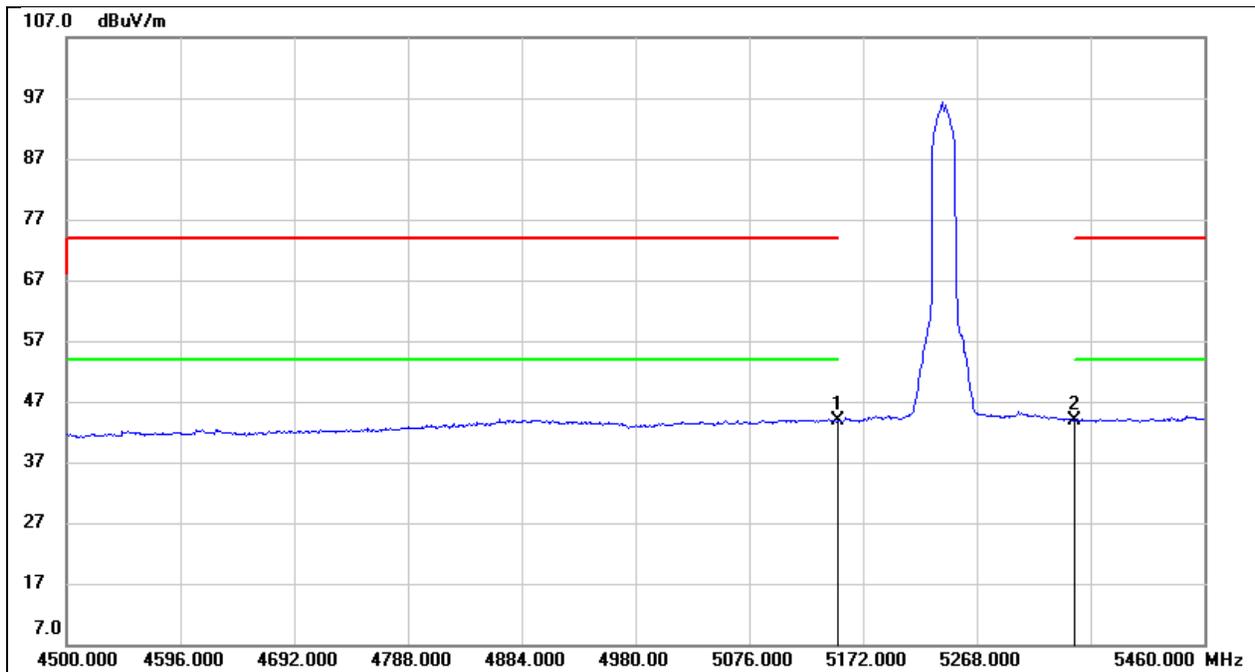


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	3.51	40.27	43.78	54.00	-10.22	AVG
2	5350.000	3.41	40.49	43.90	54.00	-10.10	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

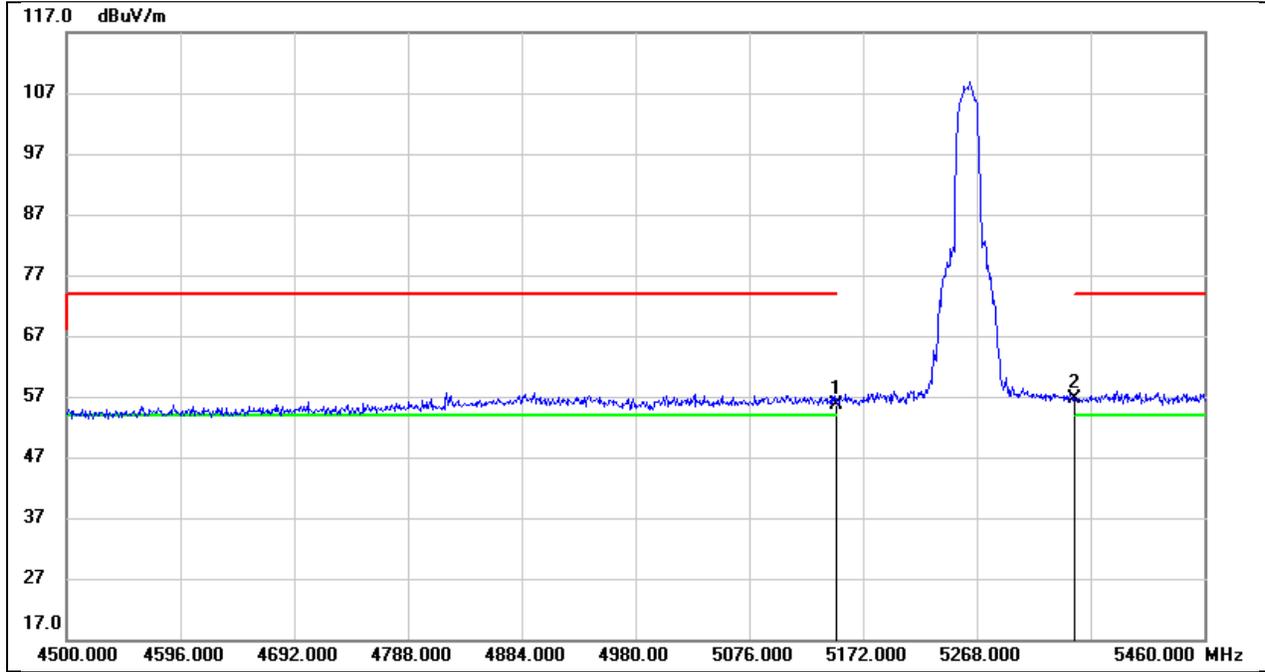


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	15.26	40.27	55.53	74.00	-18.47	peak
2	5350.000	16.16	40.49	56.65	74.00	-17.35	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

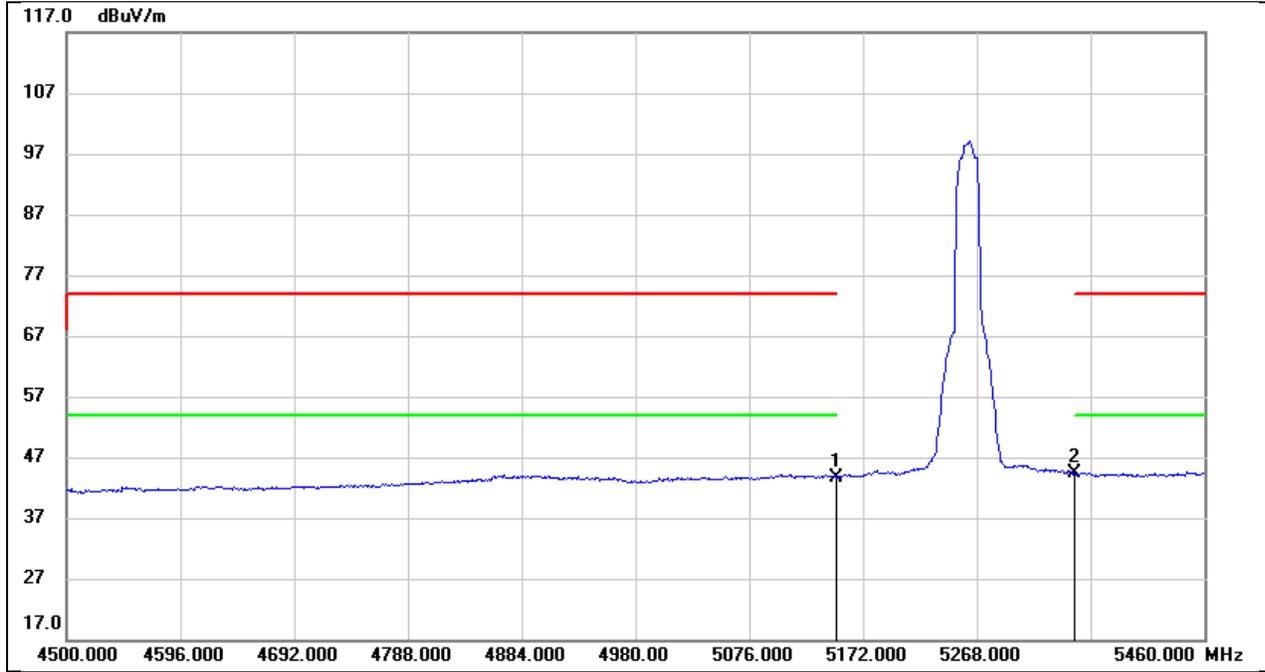


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	3.43	40.27	43.70	54.00	-10.30	AVG
2	5350.000	3.81	40.49	44.30	54.00	-9.70	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

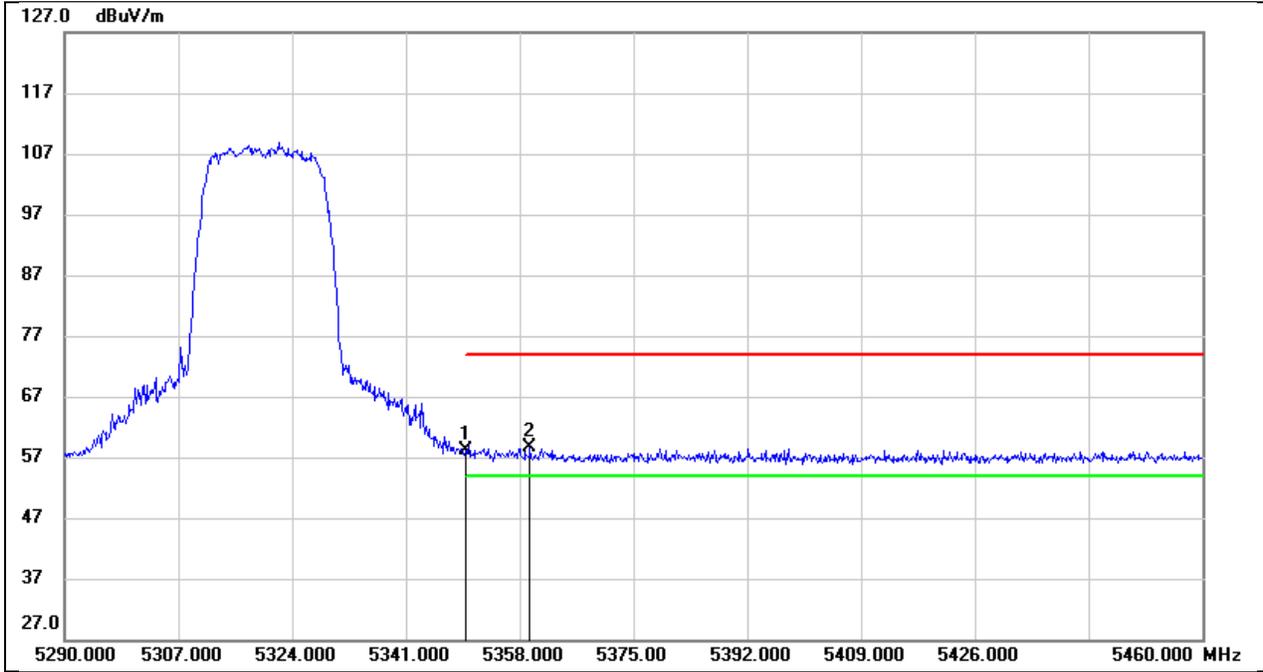


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	17.69	40.49	58.18	74.00	-15.82	peak
2	5359.530	18.09	40.51	58.60	74.00	-15.40	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

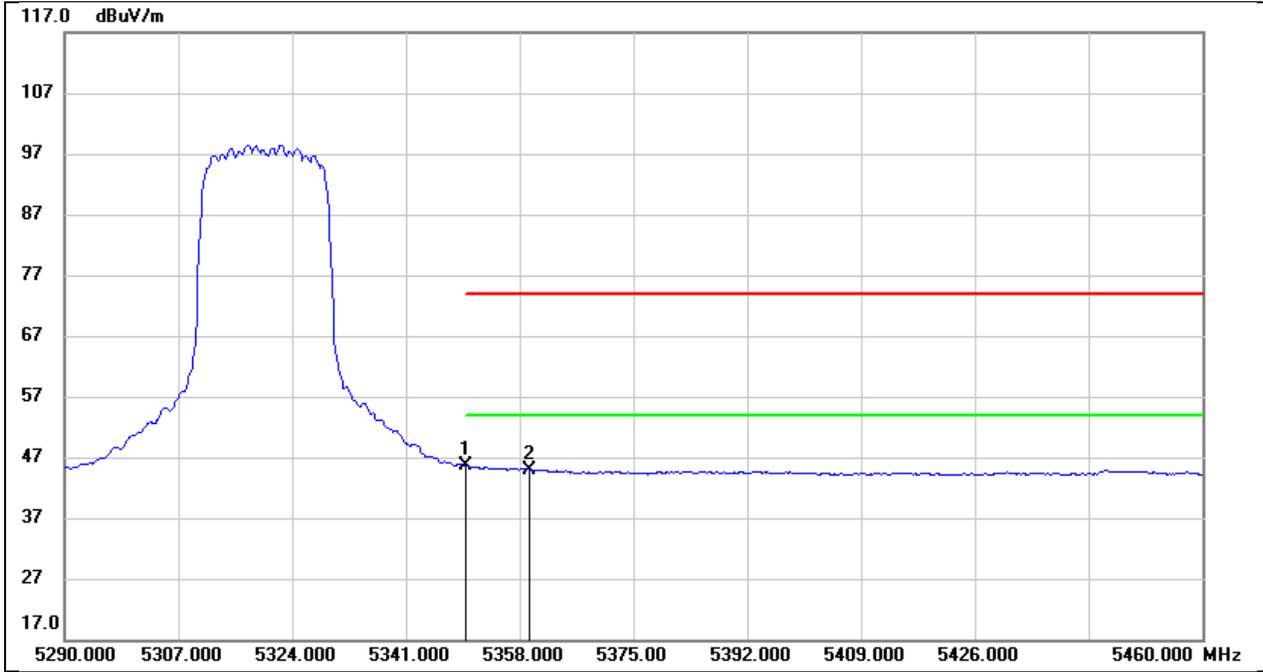


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	5.11	40.49	45.60	54.00	-8.40	AVG
2	5359.530	4.43	40.51	44.94	54.00	-9.06	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

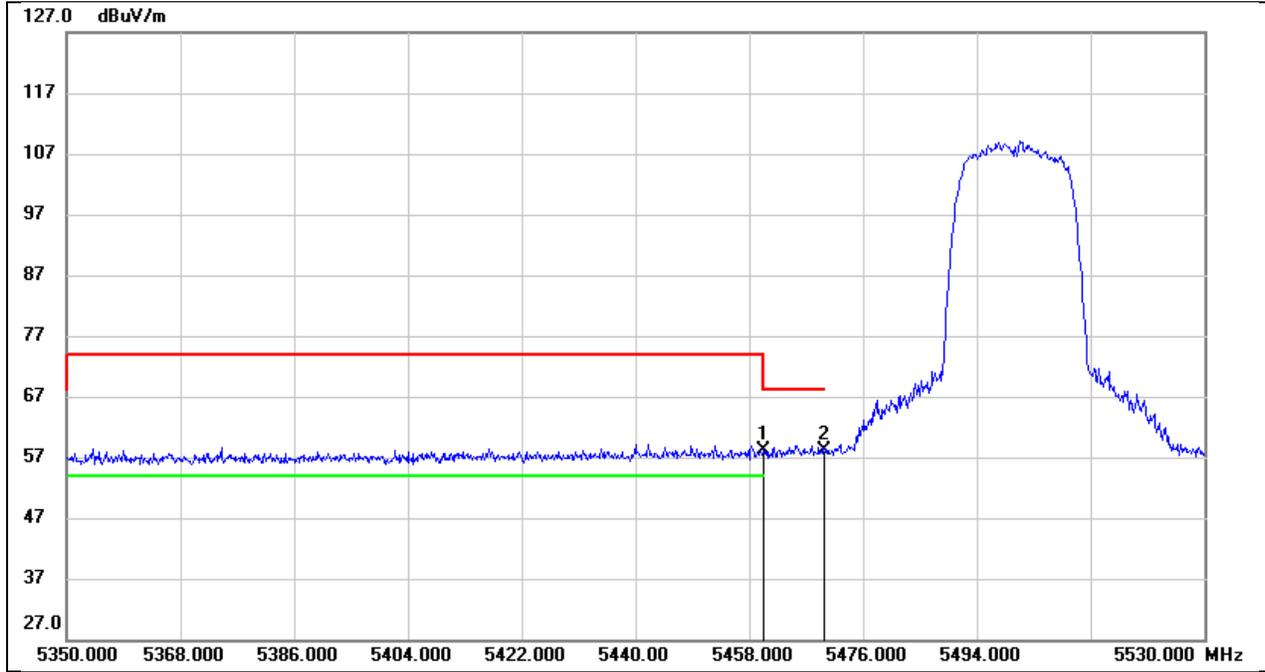


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	17.62	40.62	58.24	74.00	-15.76	peak
2	5470.000	17.60	40.63	58.23	68.20	-9.97	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

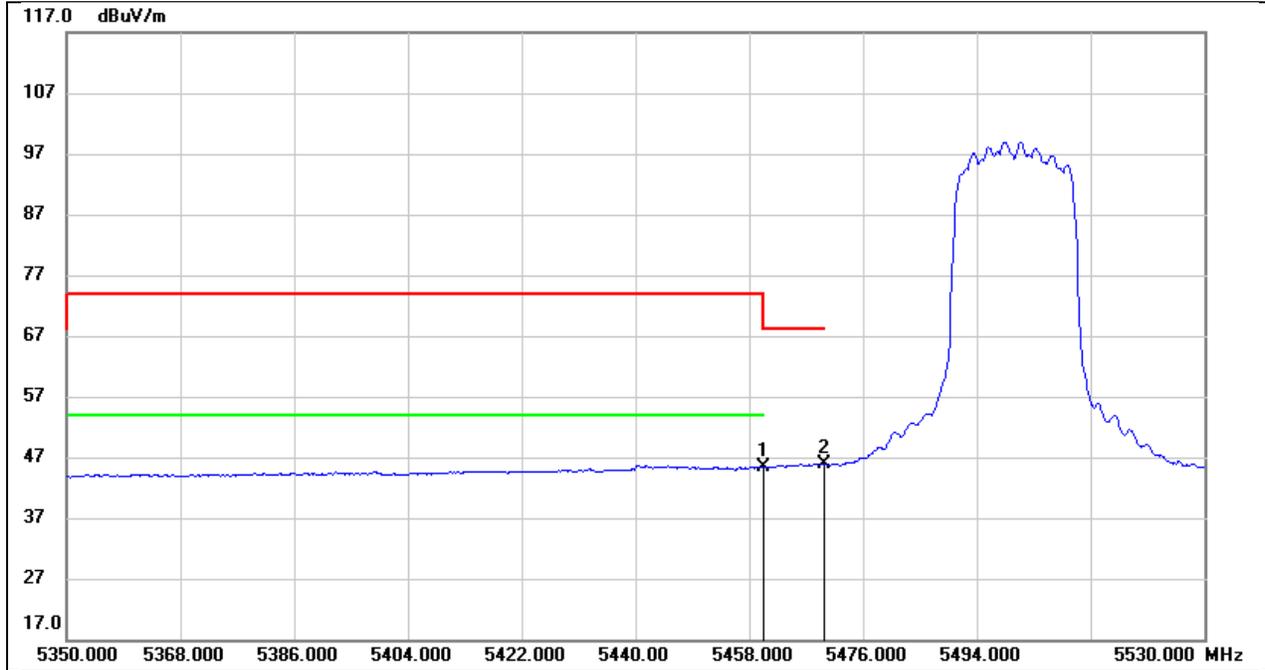


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	4.80	40.62	45.42	54.00	-8.58	AVG
2	5470.000	5.28	40.63	45.91	/	/	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3V

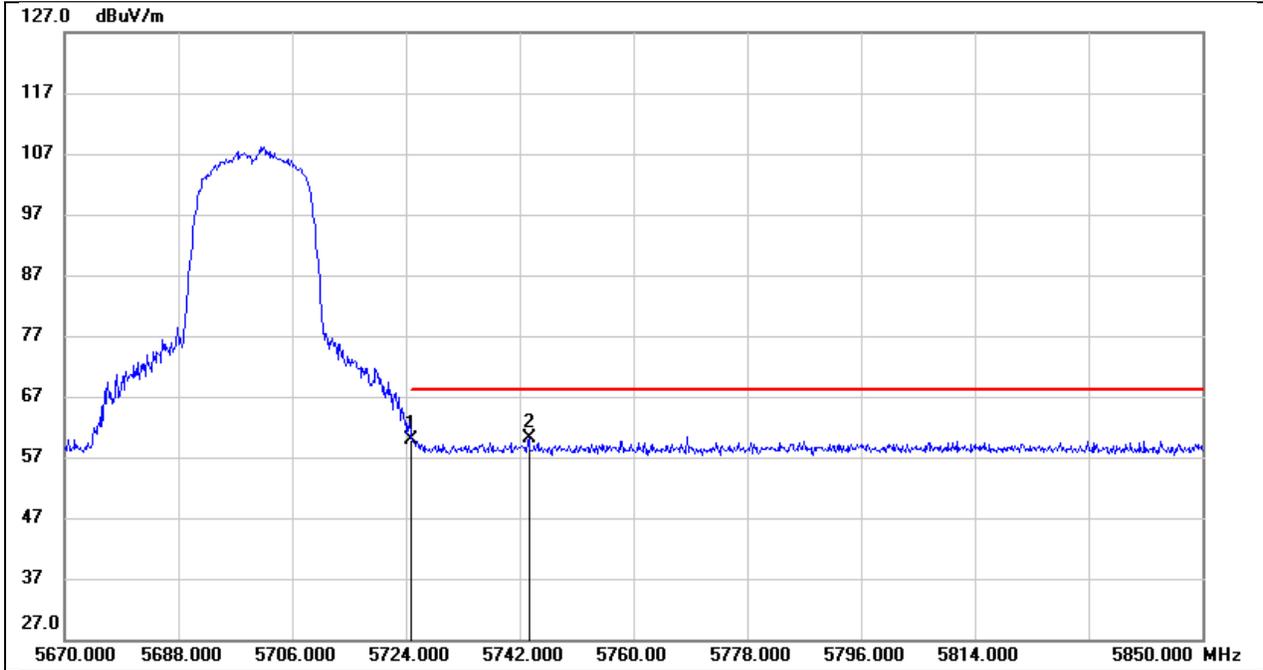


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	18.62	41.27	59.89	68.20	-8.31	peak
2	5743.440	18.71	41.31	60.02	68.20	-8.18	peak

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

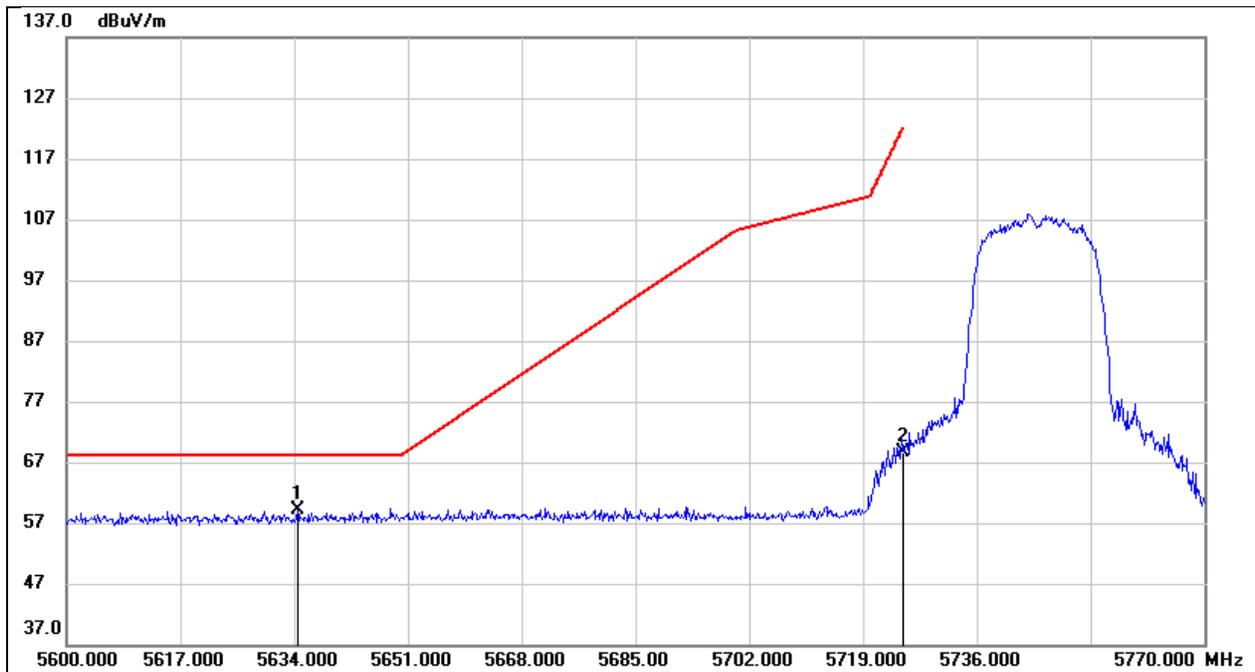


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5634.510	18.19	41.02	59.21	68.20	-8.99	peak
2	5725.000	27.27	41.27	68.54	122.20	-53.66	peak

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

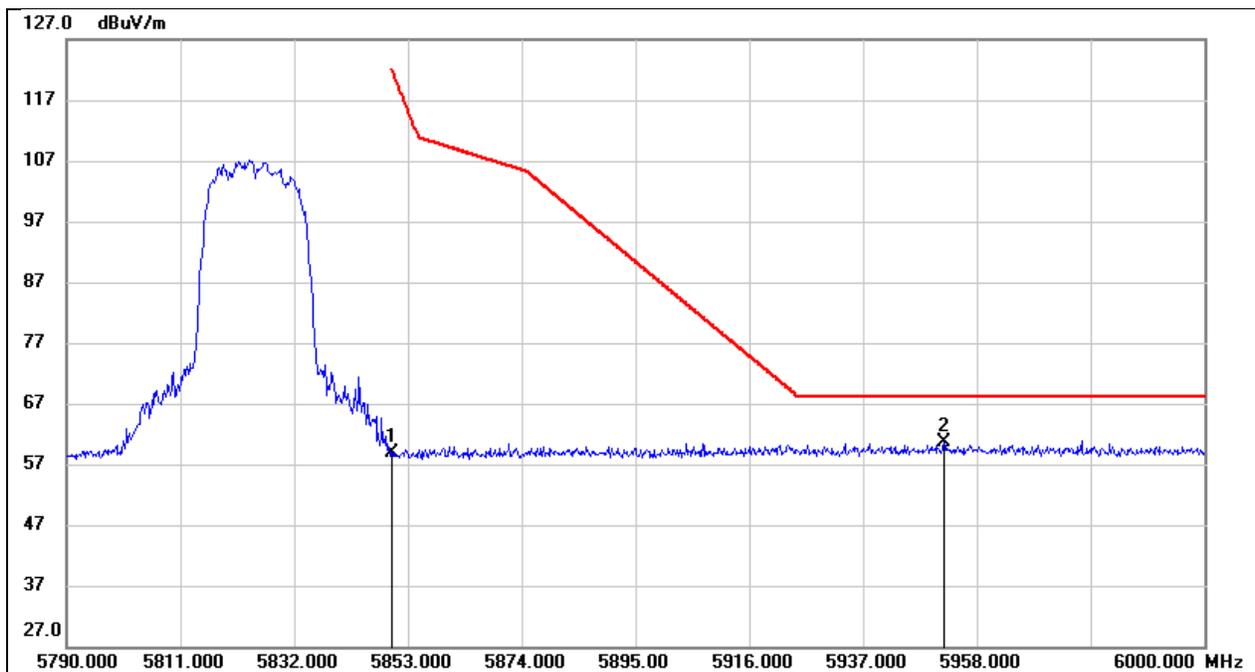


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	17.27	41.60	58.87	122.20	-63.33	peak
2	5951.910	18.76	41.87	60.63	68.20	-7.57	peak

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3V

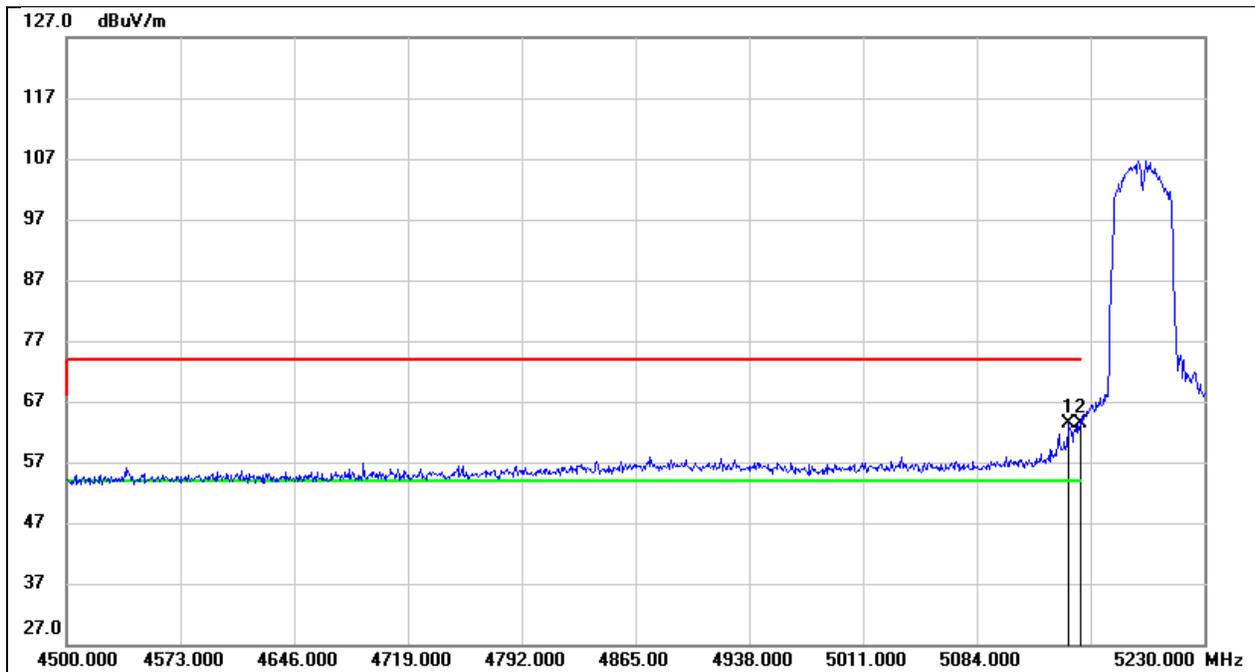


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.130	23.15	40.27	63.42	74.00	-10.58	peak
2	5150.000	23.05	40.27	63.32	74.00	-10.68	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3V

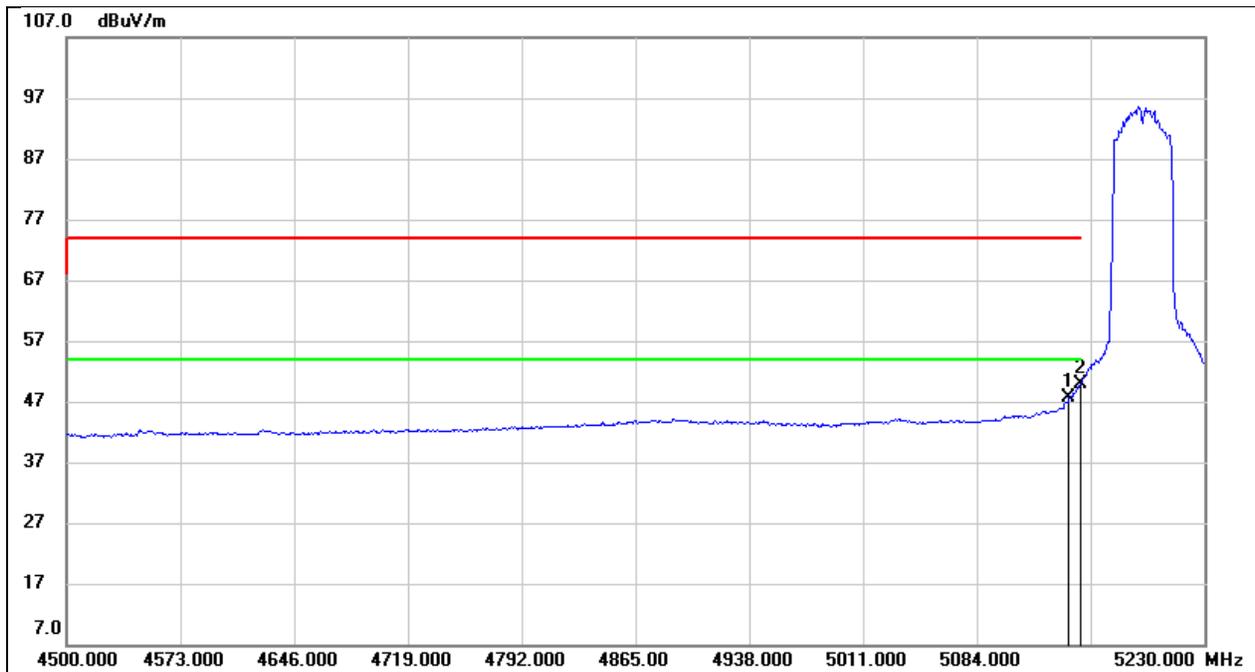


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.130	7.24	40.27	47.51	54.00	-6.49	AVG
2	5150.000	9.69	40.27	49.96	54.00	-4.04	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3V

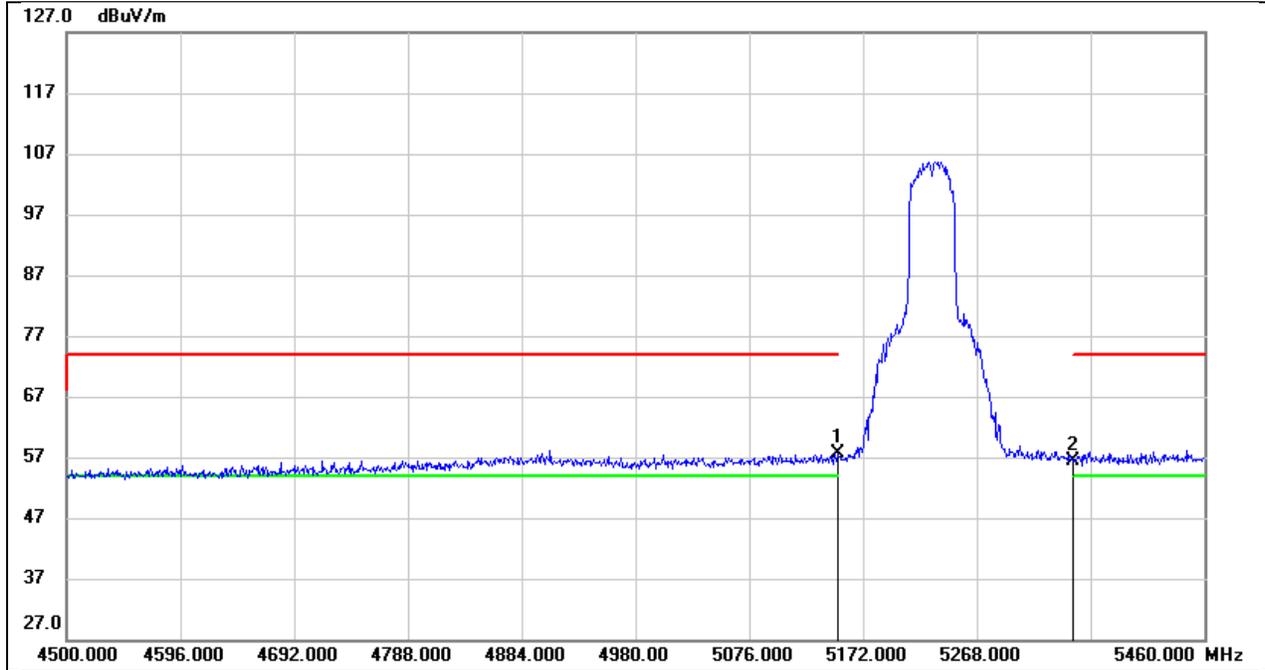


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	17.25	40.27	57.52	74.00	-16.48	peak
2	5350.000	16.00	40.49	56.49	74.00	-17.51	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3V

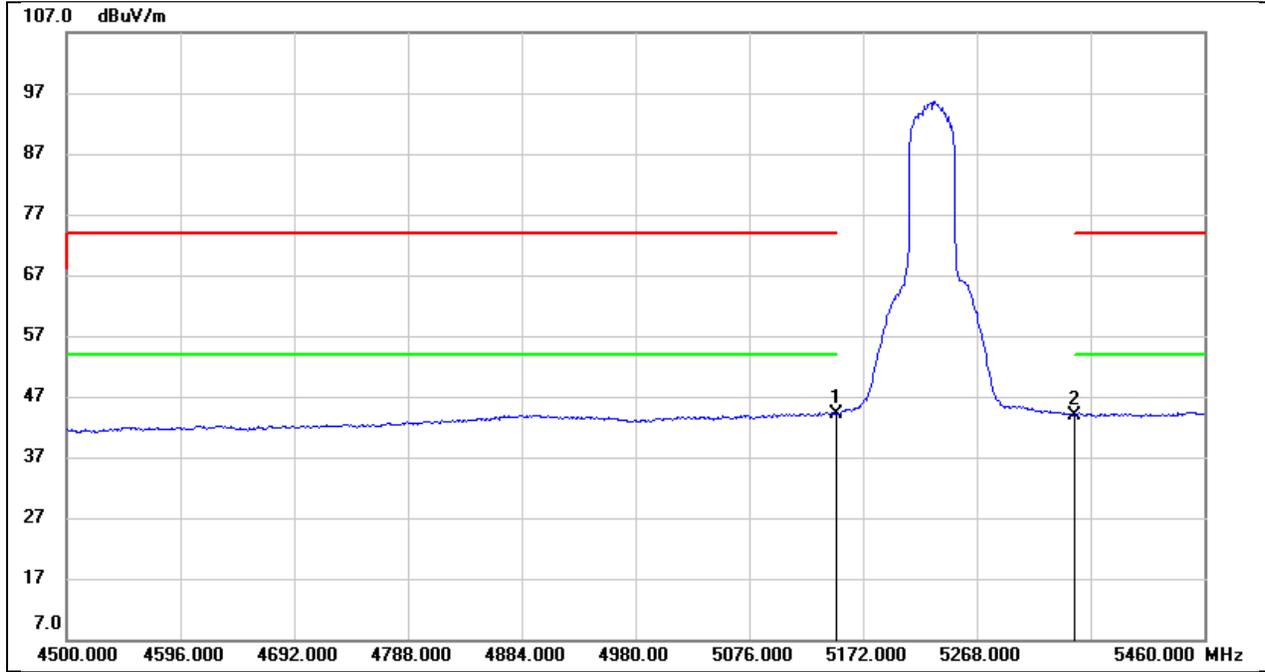


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	3.77	40.27	44.04	54.00	-9.96	AVG
2	5350.000	3.47	40.49	43.96	54.00	-10.04	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3V

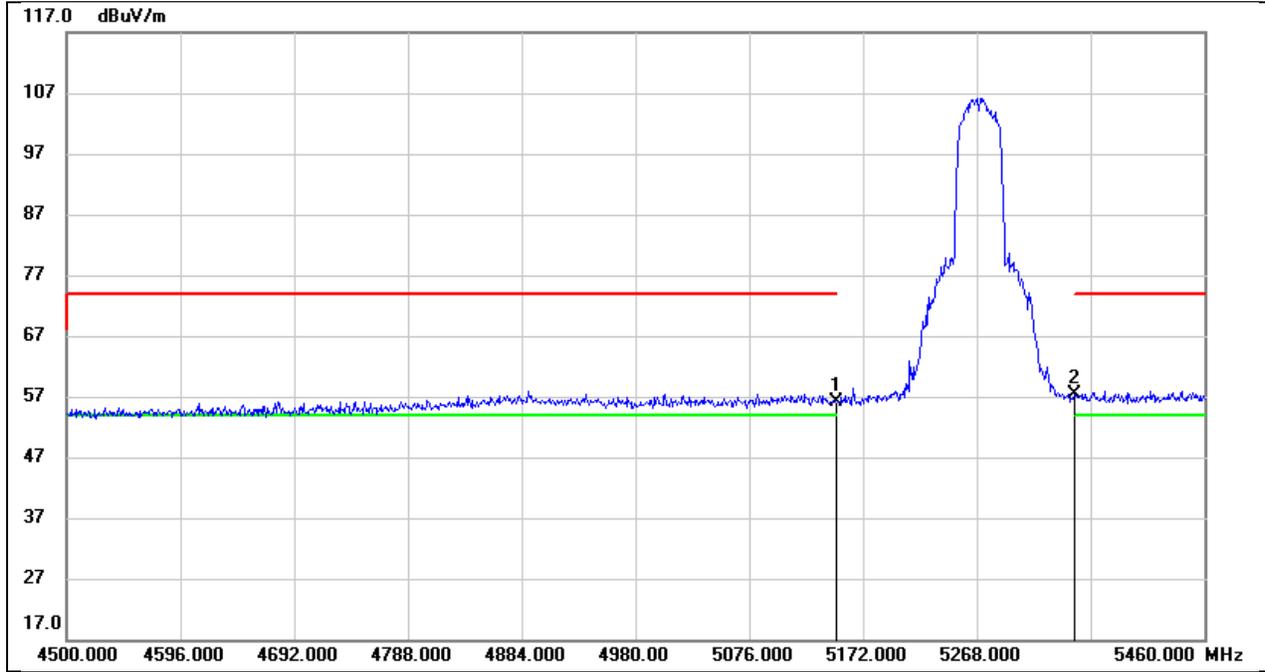


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	15.94	40.27	56.21	74.00	-17.79	peak
2	5350.000	16.86	40.49	57.35	74.00	-16.65	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3V

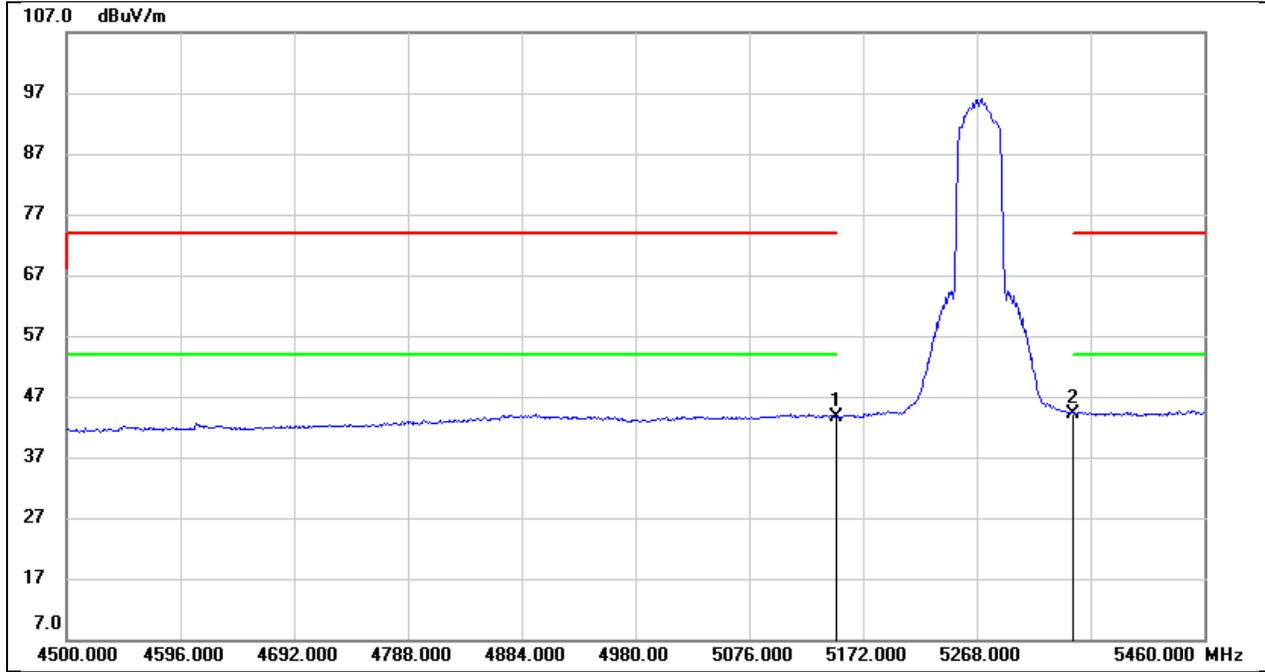


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	3.33	40.27	43.60	54.00	-10.40	AVG
2	5350.000	3.73	40.49	44.22	54.00	-9.78	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3V

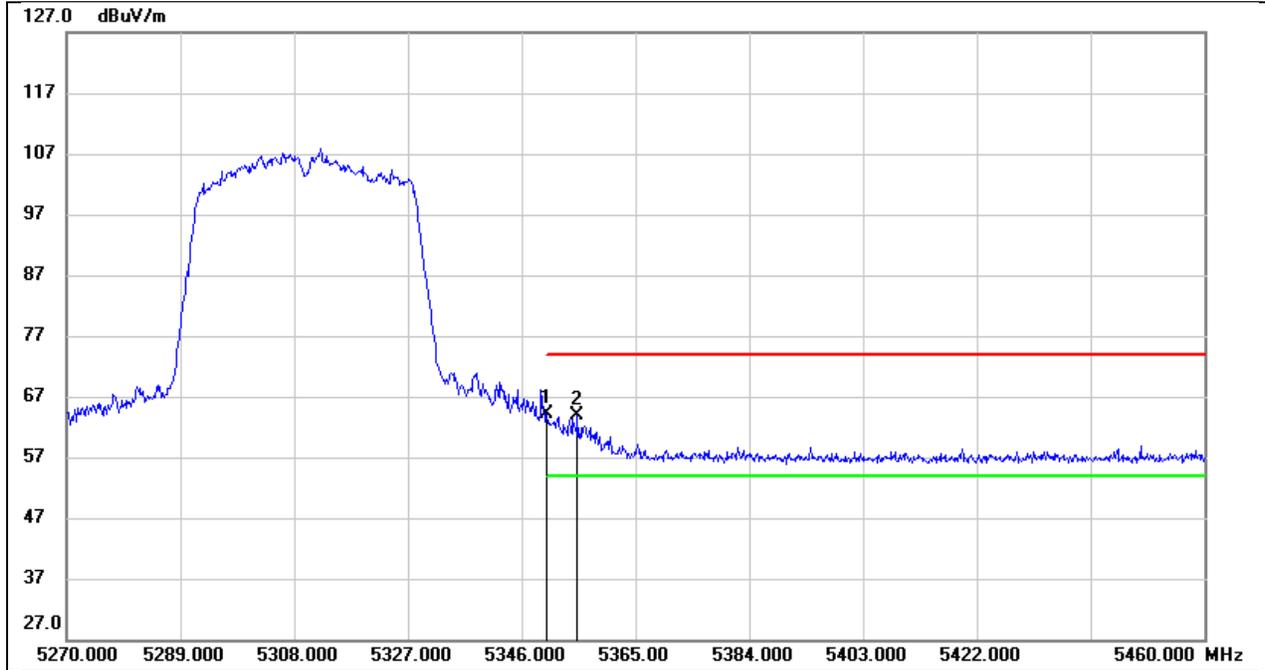


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	23.63	40.49	64.12	74.00	-9.88	peak
2	5355.310	23.45	40.50	63.95	74.00	-10.05	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3V

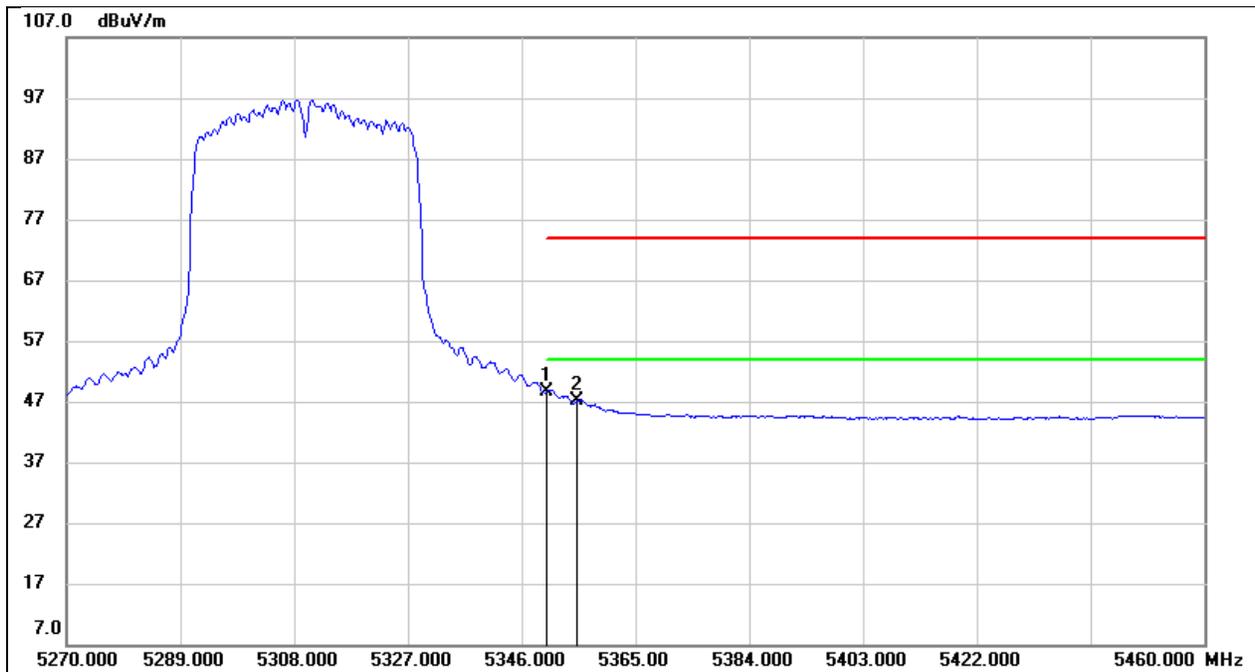


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	8.08	40.49	48.57	54.00	-5.43	AVG
2	5355.310	6.51	40.50	47.01	54.00	-6.99	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3V

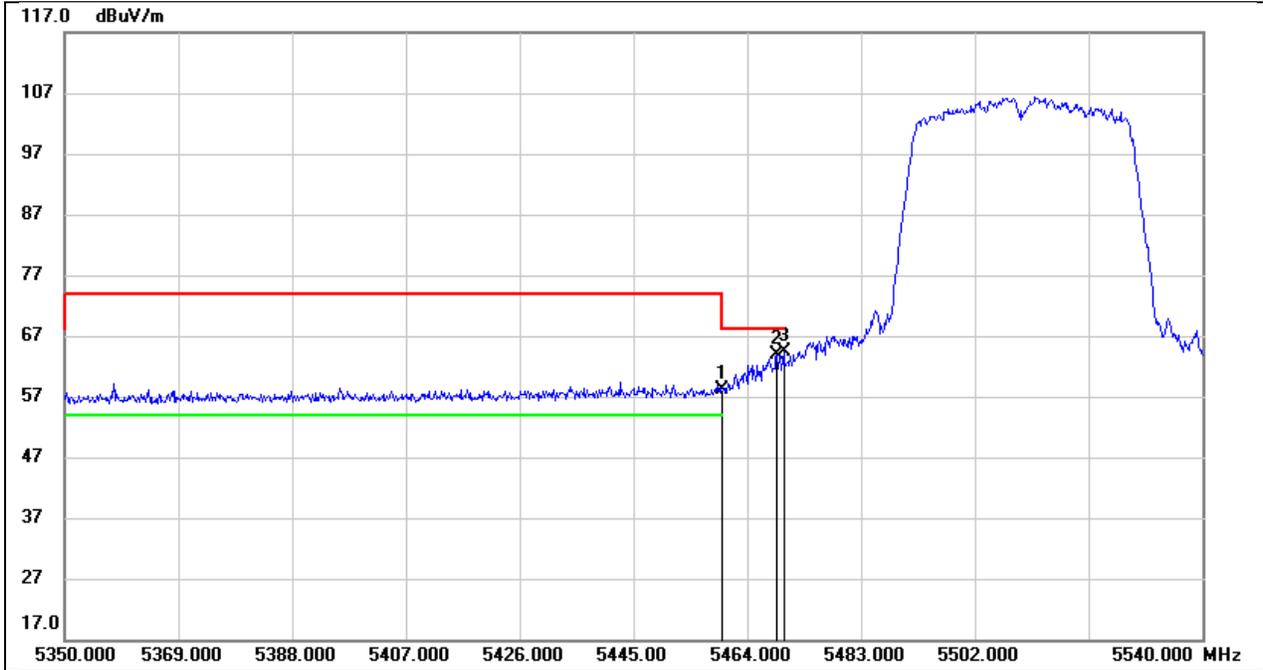


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	17.47	40.62	58.09	74.00	-15.91	peak
2	5468.940	23.26	40.63	63.89	68.20	-4.31	peak
3	5470.000	23.68	40.63	64.31	68.20	-3.89	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3V

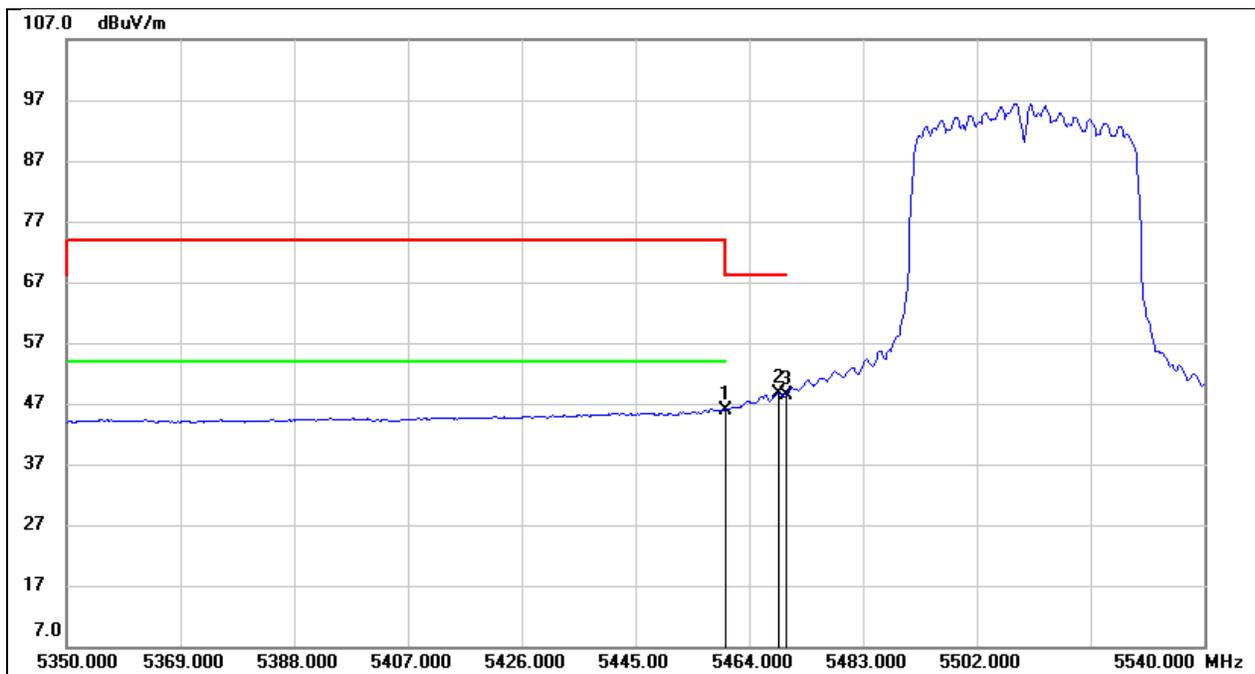


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	5.36	40.62	45.98	54.00	-8.02	AVG
2	5468.940	8.07	40.63	48.70	/	/	AVG
3	5470.000	7.73	40.63	48.36	/	/	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 3.3V

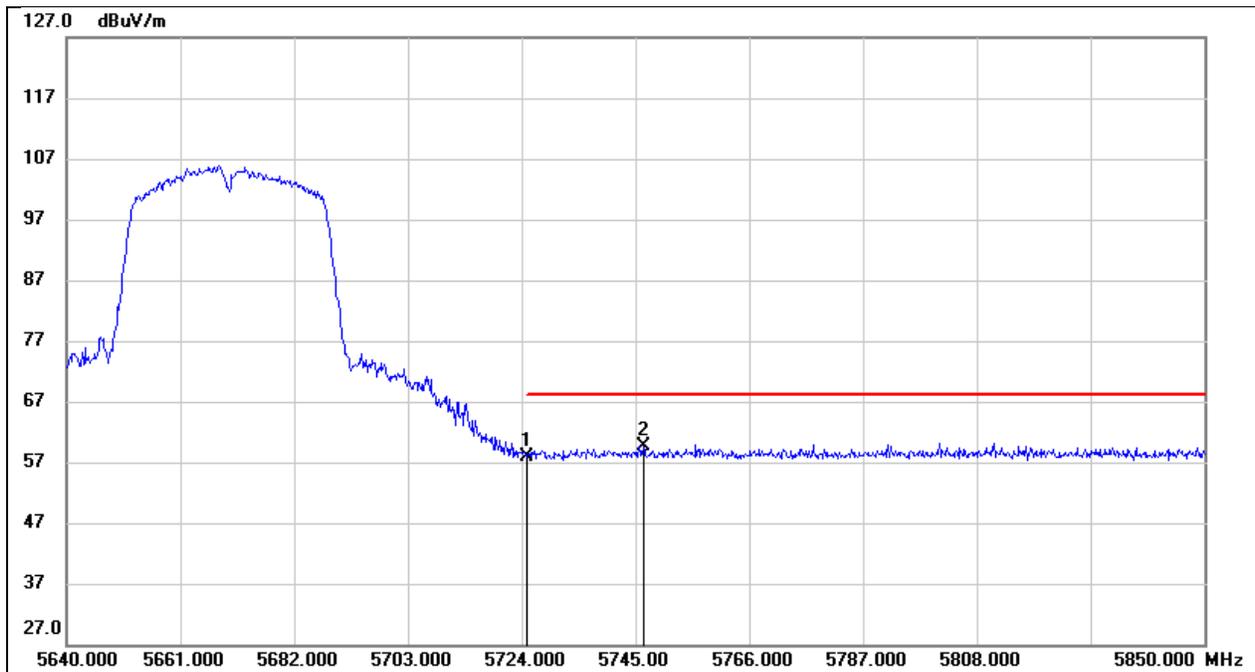


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	16.57	41.27	57.84	68.20	-10.36	peak
2	5746.470	18.24	41.32	59.56	68.20	-8.64	peak

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.3V

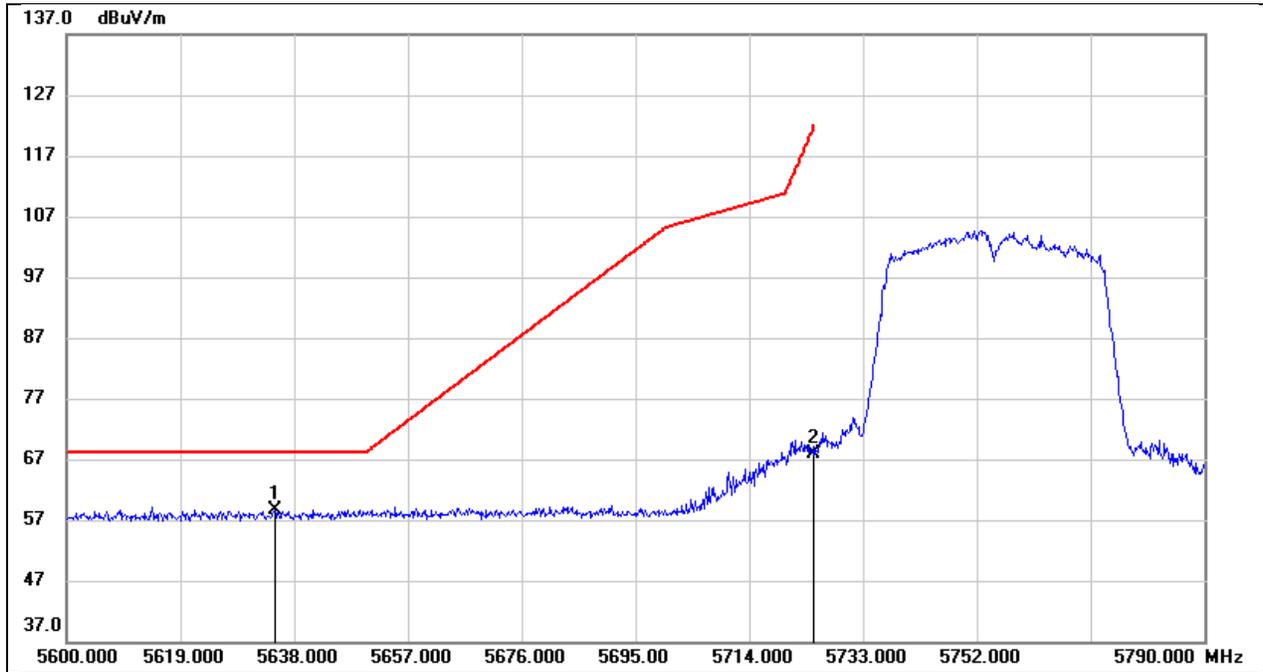


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5634.770	17.66	41.02	58.68	68.20	-9.52	peak
2	5725.000	26.57	41.27	67.84	122.20	-54.36	peak

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.3V

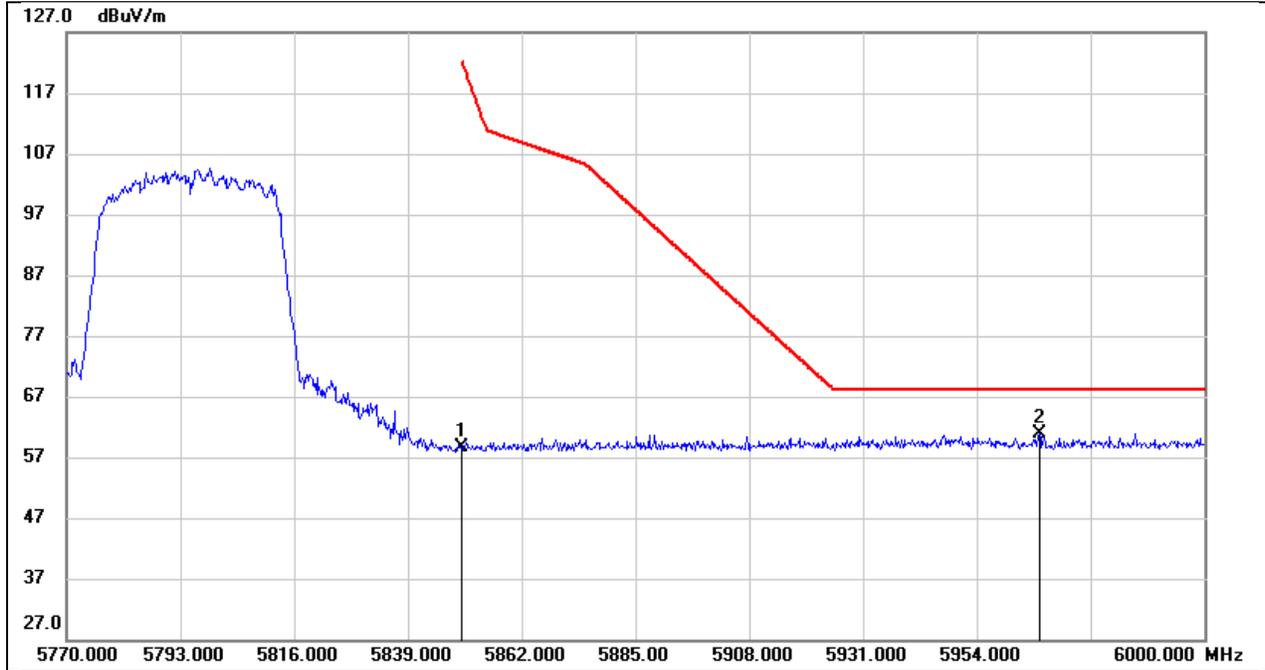


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	17.01	41.60	58.61	122.20	-63.59	peak
2	5966.650	18.89	41.91	60.80	68.20	-7.40	peak

Test Mode:	802.11ac VHT80 PK	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3V

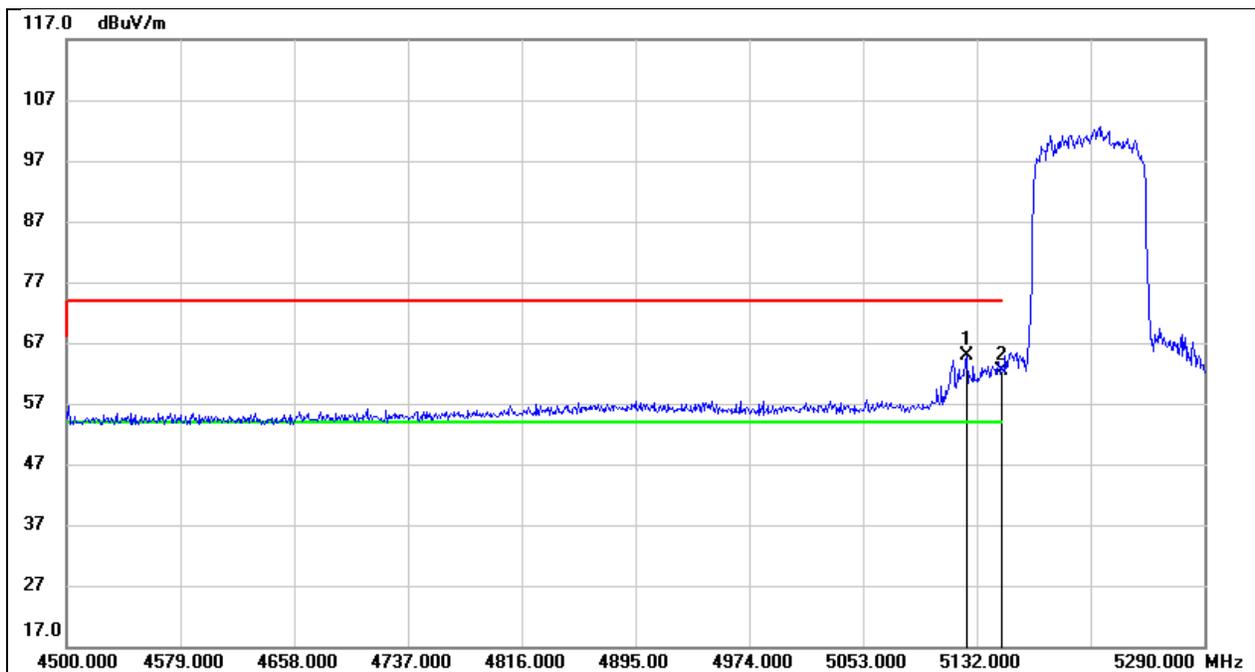


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5124.890	24.58	40.25	64.83	74.00	-9.17	peak
2	5150.000	22.22	40.27	62.49	74.00	-11.51	peak

Test Mode:	802.11ac VHT80 AV	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3V

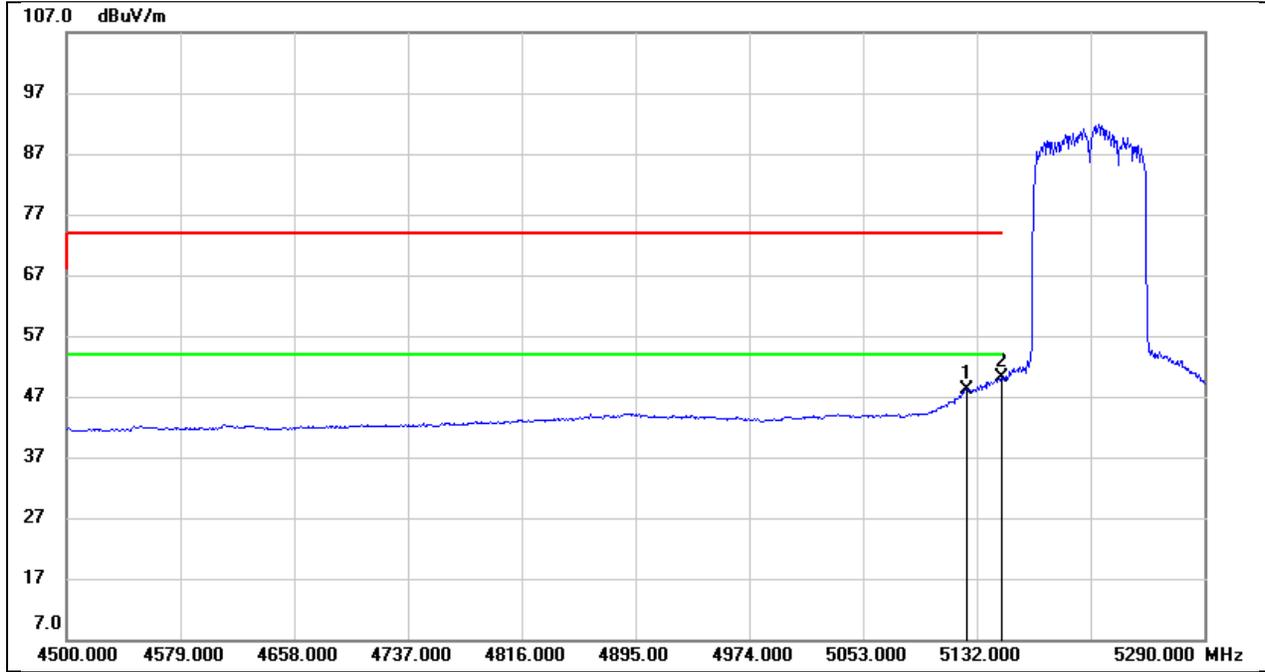


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5124.890	7.90	40.25	48.15	54.00	-5.85	AVG
2	5150.000	9.89	40.27	50.16	54.00	-3.84	AVG

Test Mode:	802.11ac VHT80 PK	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3V

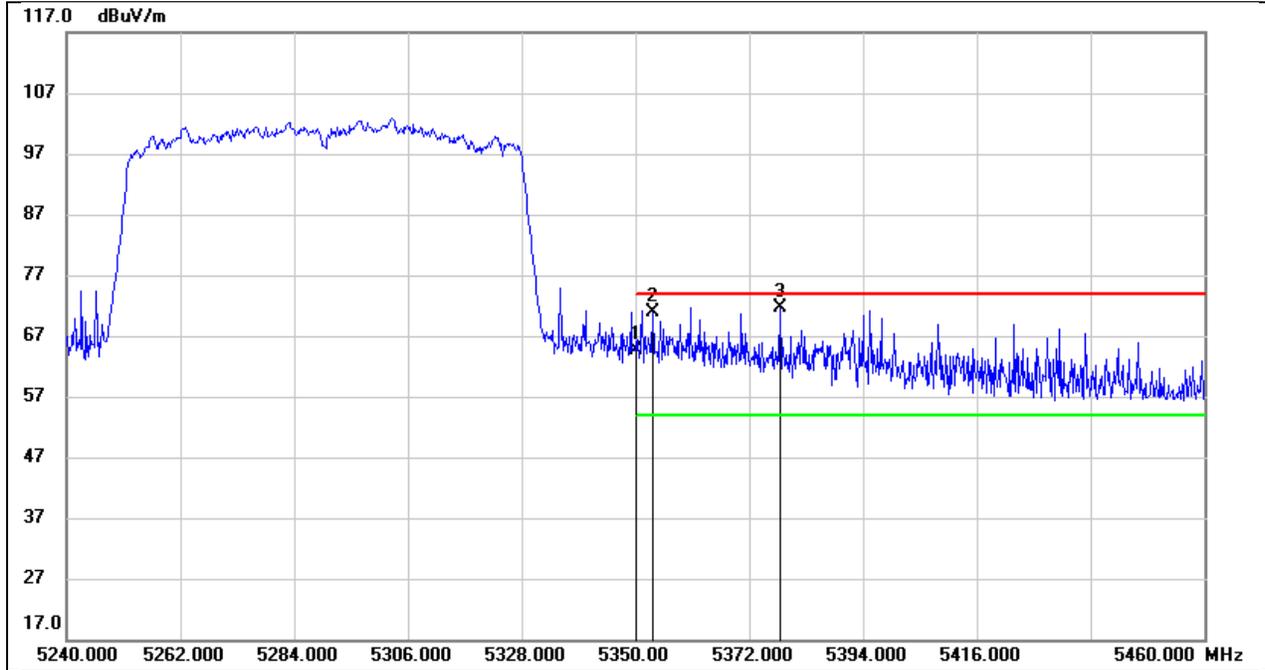


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	24.12	40.49	64.61	74.00	-9.39	peak
2	5353.300	30.26	40.50	70.76	74.00	-3.24	peak
3	5377.940	31.17	40.53	71.70	74.00	-2.30	peak

Test Mode:	802.11ac VHT80 AV	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3V

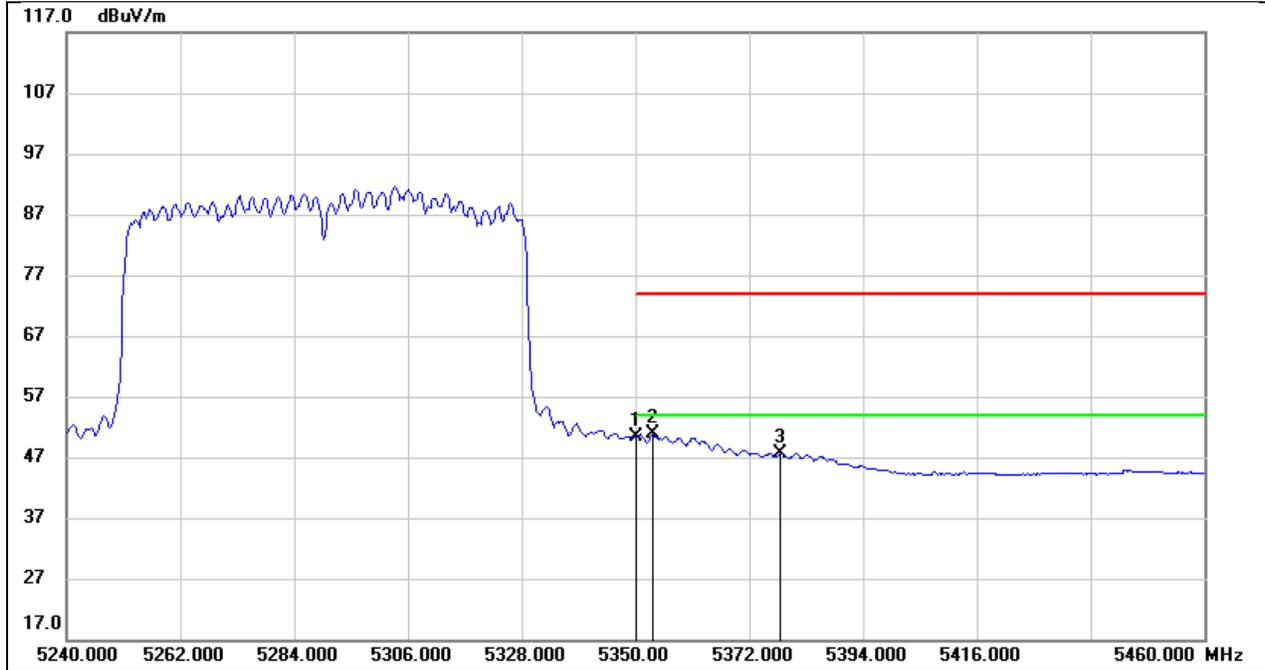


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	9.85	40.49	50.34	54.00	-3.66	AVG
2	5353.300	10.28	40.50	50.78	54.00	-3.22	AVG
3	5377.940	7.00	40.53	47.53	54.00	-6.47	AVG

Test Mode:	802.11ac VHT80 PK	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3V

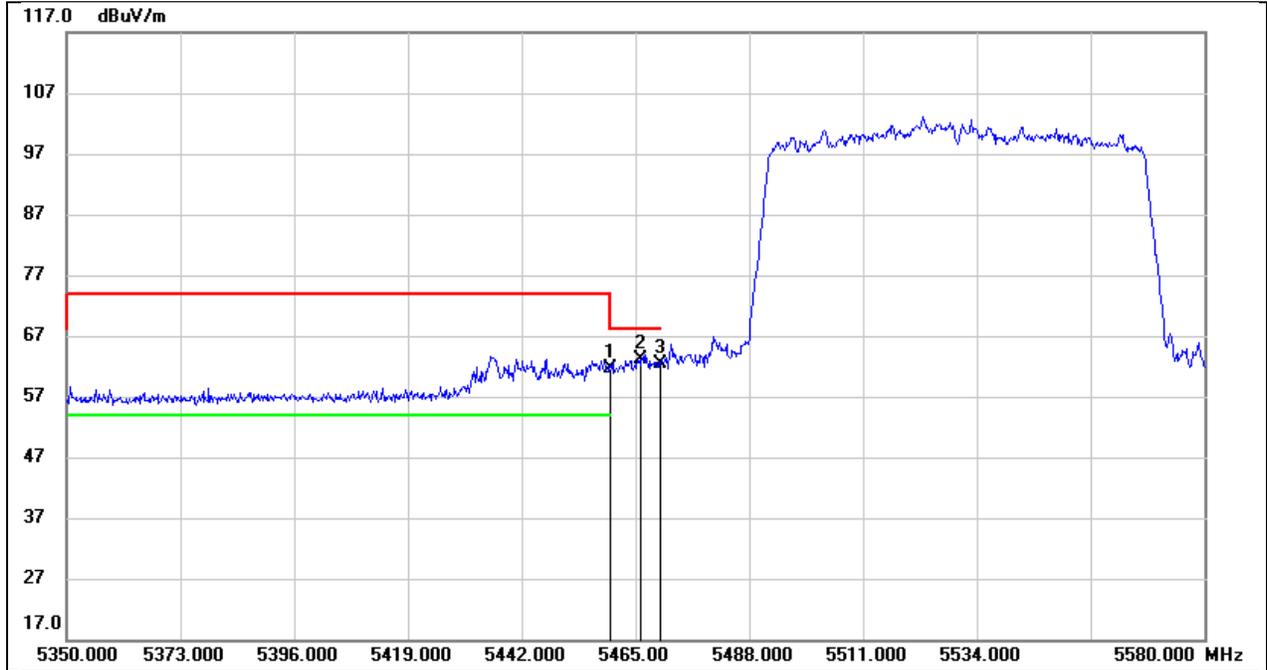


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	20.91	40.62	61.53	74.00	-12.47	peak
2	5466.150	22.59	40.62	63.21	68.20	-4.99	peak
3	5470.000	21.75	40.63	62.38	68.20	-5.82	peak

Test Mode:	802.11ac VHT80 AV	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3V

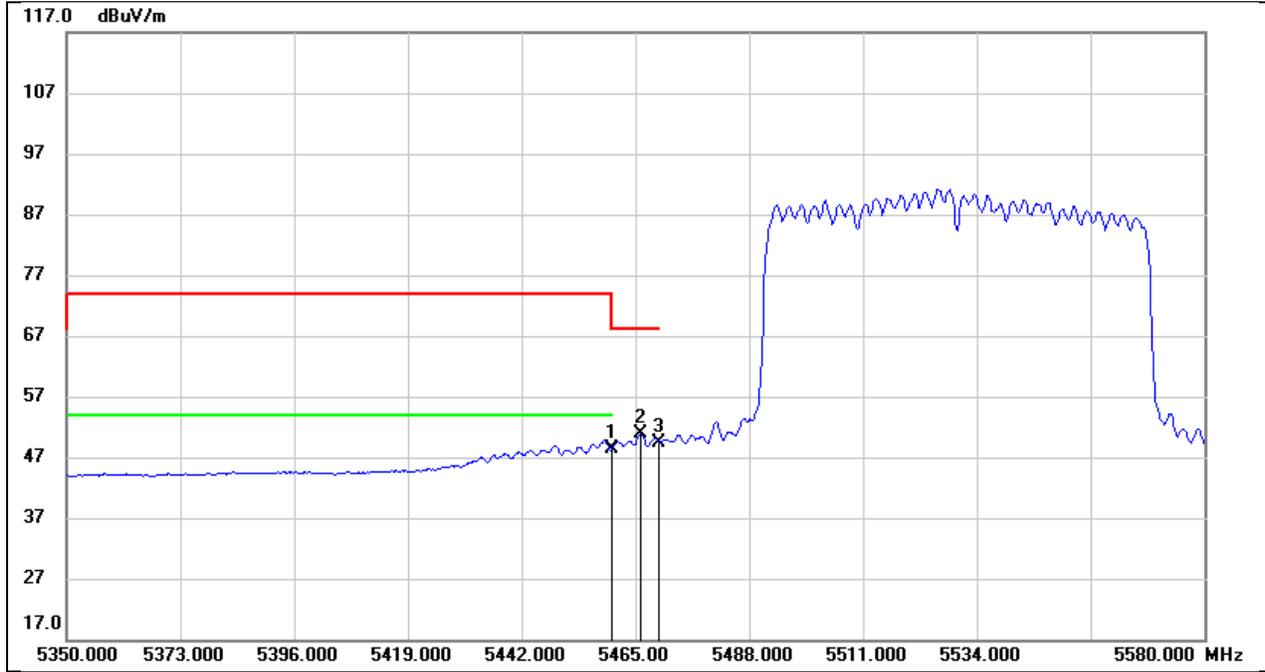


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	7.65	40.62	48.27	54.00	-5.73	AVG
2	5466.150	10.28	40.62	50.90	/	/	AVG
3	5470.000	8.75	40.63	49.38	/	/	AVG

Test Mode:	802.11ac VHT80 PK	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3V

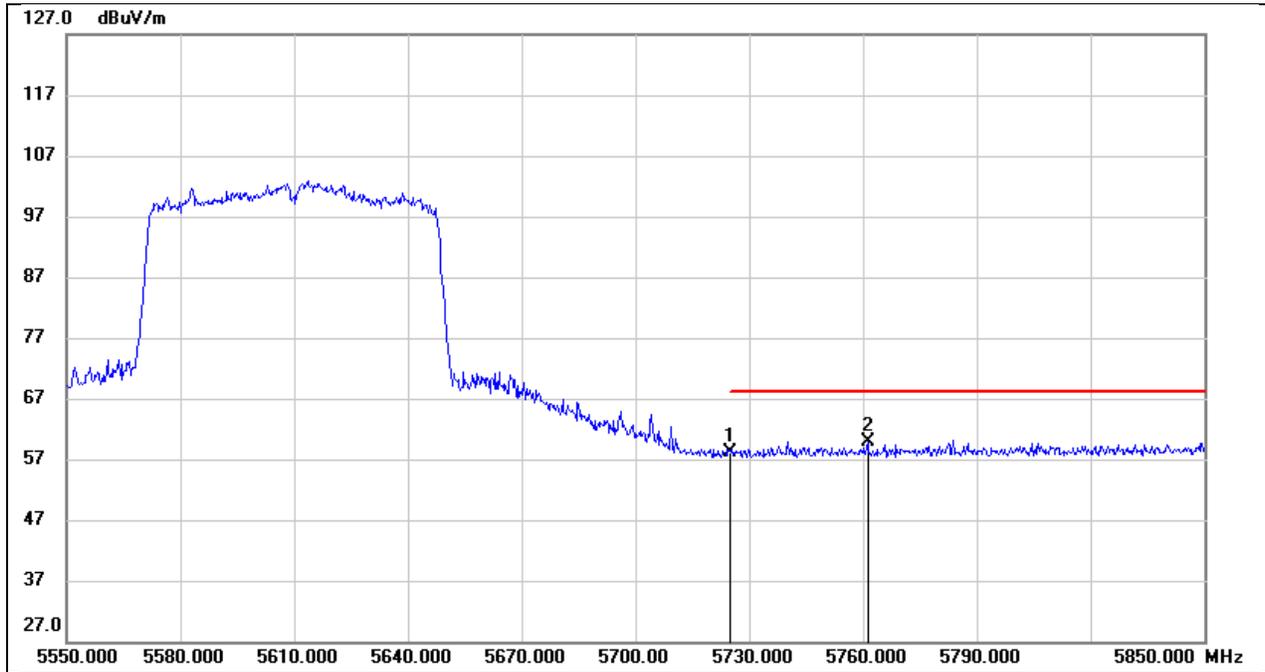

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	16.76	41.27	58.03	68.20	-10.17	peak
2	5761.200	18.44	41.36	59.80	68.20	-8.40	peak


Test Mode:	802.11ac VHT80 PK	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3V

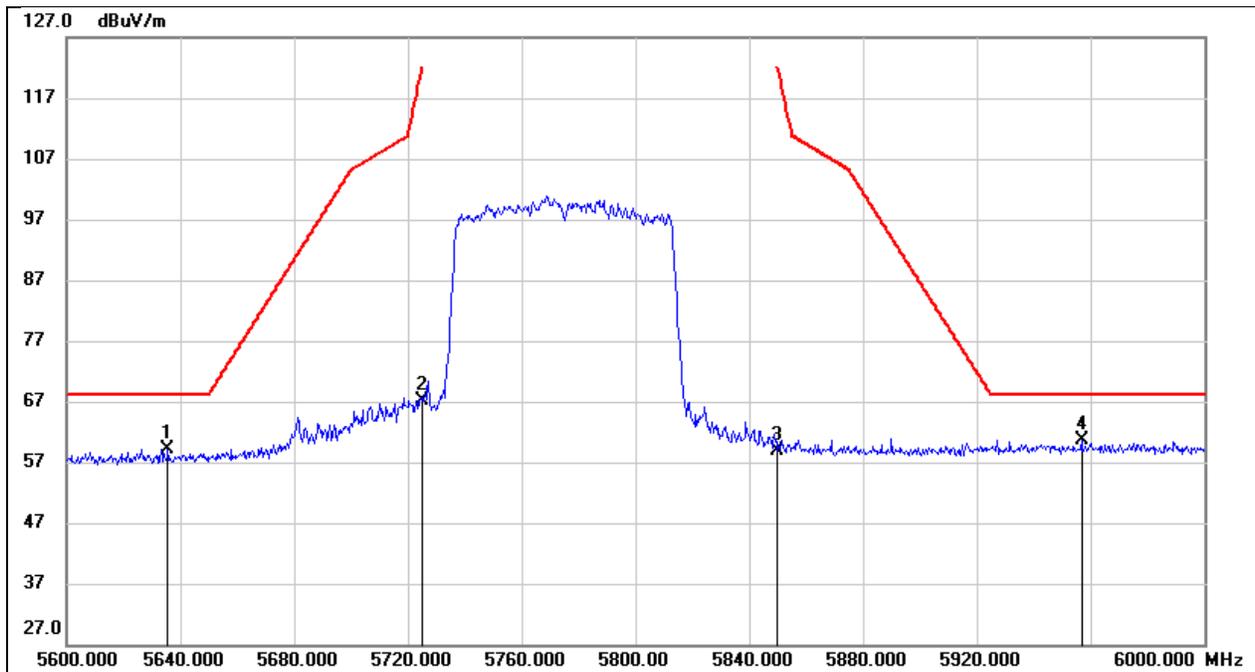

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5635.600	18.15	41.03	59.18	68.20	-9.02	peak
2	5725.000	25.81	41.27	67.08	122.20	-55.12	peak
3	5850.000	17.36	41.60	58.96	122.20	-63.24	peak
4	5956.800	18.65	41.89	60.54	68.20	-7.66	peak


8.2. SPURIOUS EMISSIONS(1 GHZ~7 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

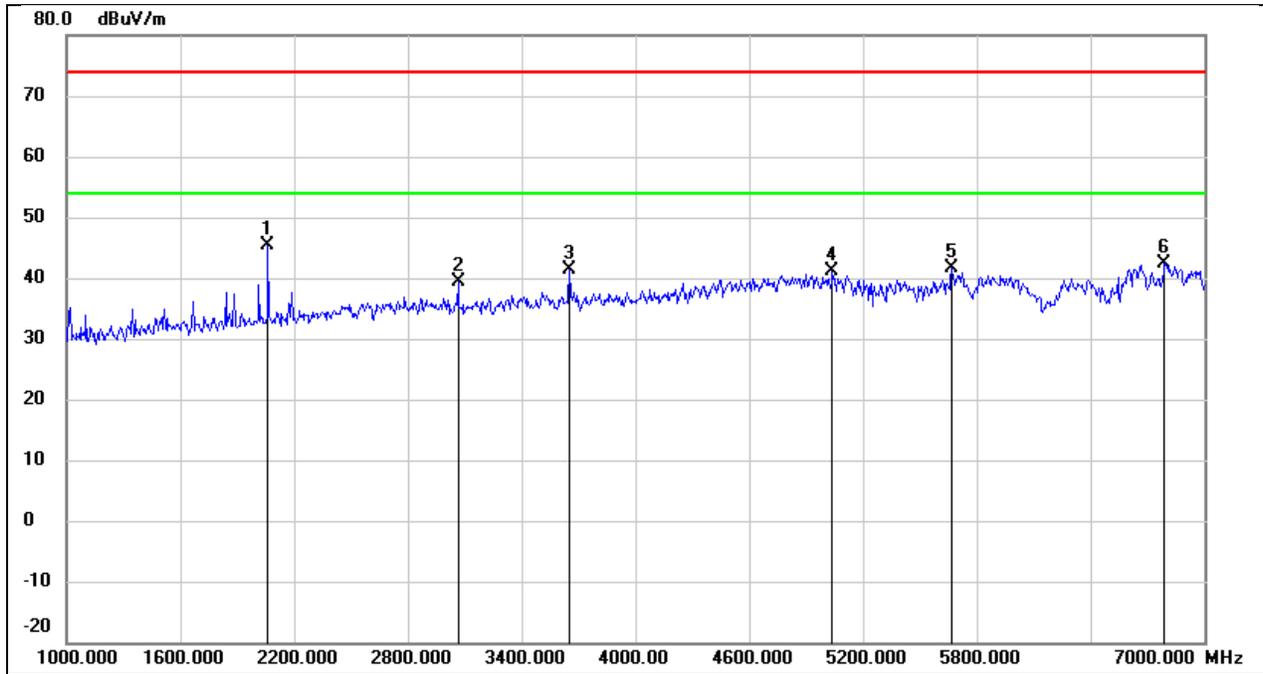


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2062.000	56.08	-10.75	45.33	74.00	-28.67	peak
2	3064.000	46.32	-6.84	39.48	74.00	-34.52	peak
3	3652.000	46.78	-5.44	41.34	74.00	-32.66	peak
4	5038.000	41.16	-0.11	41.05	74.00	-32.95	peak
5	5668.000	40.61	0.91	41.52	74.00	-32.48	peak
6	6790.000	37.35	5.15	42.50	74.00	-31.50	peak

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

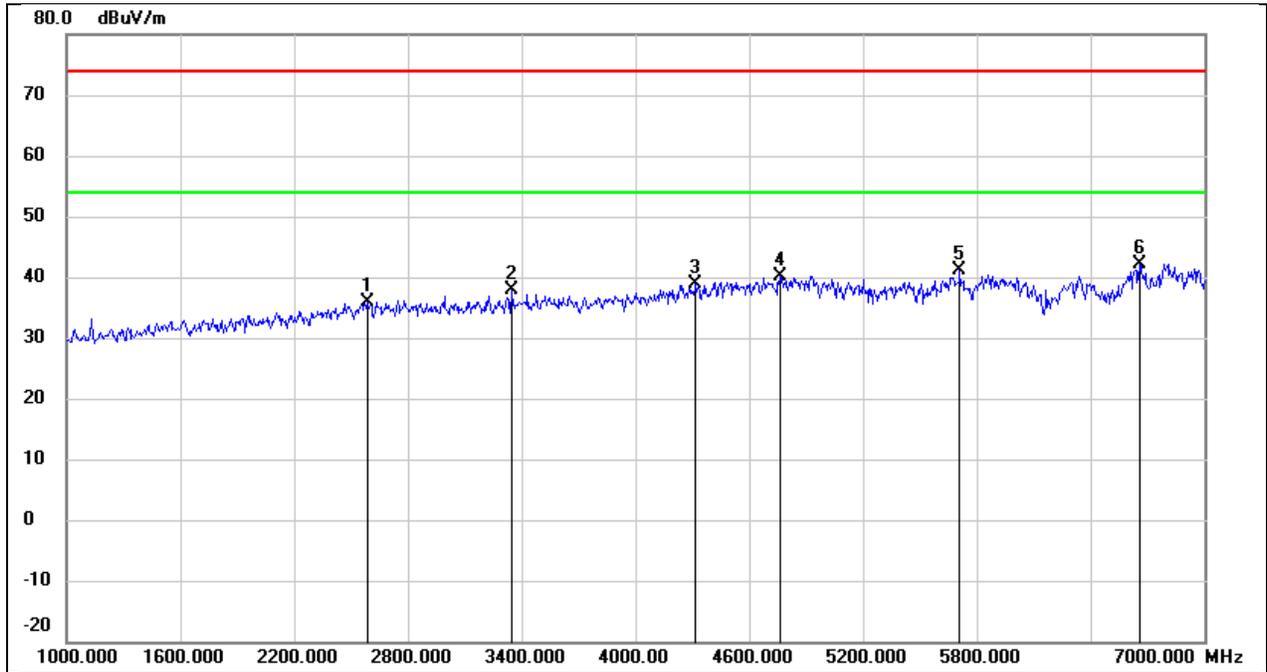


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2584.000	44.05	-8.24	35.81	74.00	-38.19	peak
2	3346.000	44.03	-6.20	37.83	74.00	-36.17	peak
3	4318.000	41.85	-2.99	38.86	74.00	-35.14	peak
4	4762.000	41.33	-1.10	40.23	74.00	-33.77	peak
5	5710.000	40.21	1.02	41.23	74.00	-32.77	peak
6	6658.000	37.70	4.49	42.19	74.00	-31.81	peak

Test Mode:	802.11a 20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 3.3V

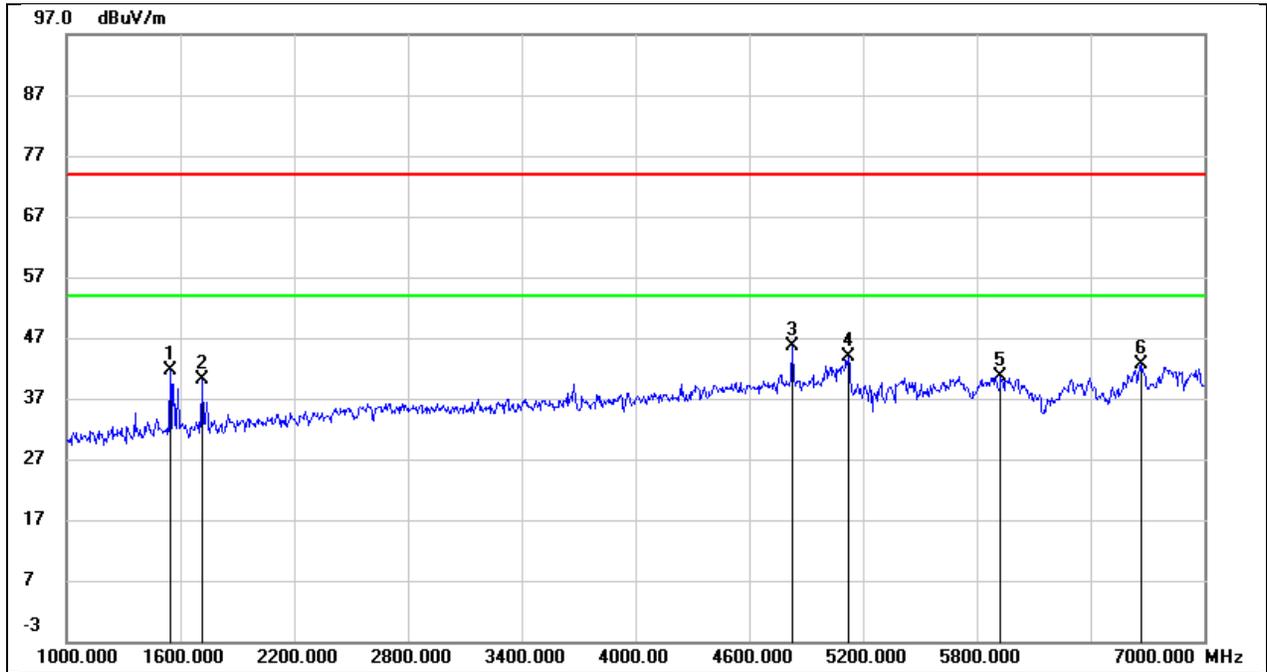


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1546.000	54.07	-12.56	41.51	74.00	-32.49	peak
2	1714.000	52.24	-12.01	40.23	74.00	-33.77	peak
3	4828.000	46.39	-0.83	45.56	74.00	-28.44	peak
4	5122.000	43.94	-0.02	43.92	74.00	-30.08	peak
5	5926.000	39.11	1.64	40.75	74.00	-33.25	peak
6	6664.000	37.99	4.54	42.53	74.00	-31.47	peak

Test Mode:	802.11a 20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 3.3V

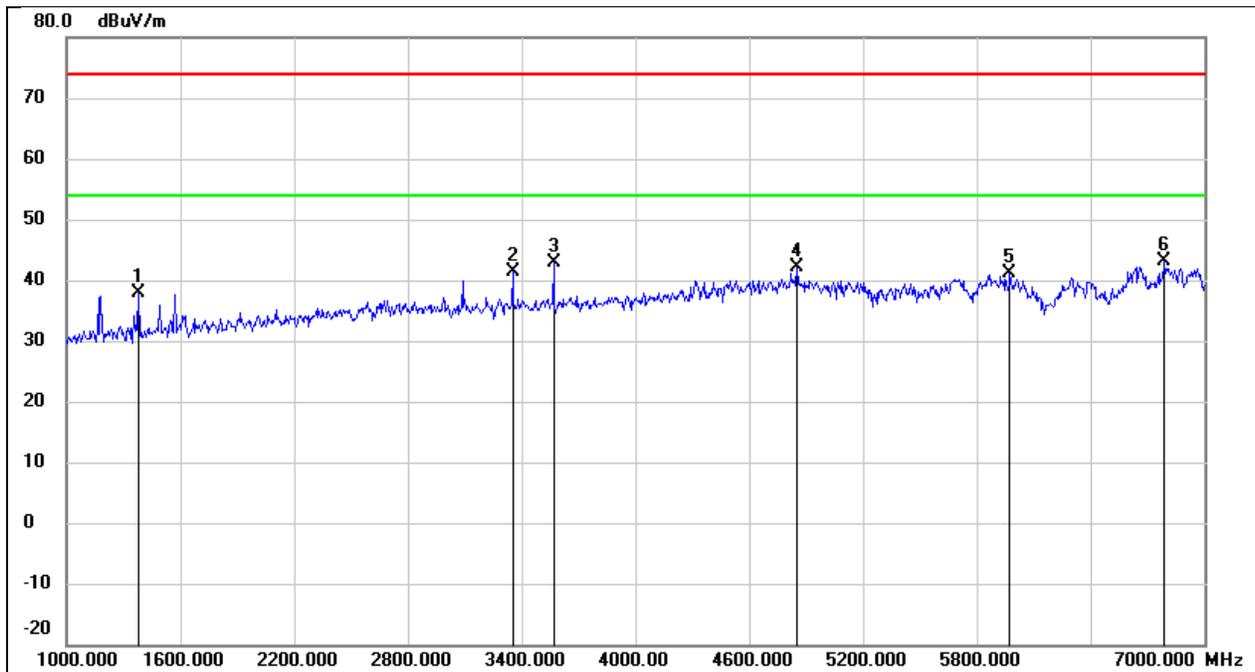


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1378.000	51.14	-13.27	37.87	74.00	-36.13	peak
2	3352.000	47.49	-6.19	41.30	74.00	-32.70	peak
3	3568.000	48.49	-5.66	42.83	74.00	-31.17	peak
4	4852.000	42.91	-0.74	42.17	74.00	-31.83	peak
5	5974.000	39.45	1.77	41.22	74.00	-32.78	peak
6	6790.000	38.07	5.15	43.22	74.00	-30.78	peak

Test Mode:	802.11a 20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

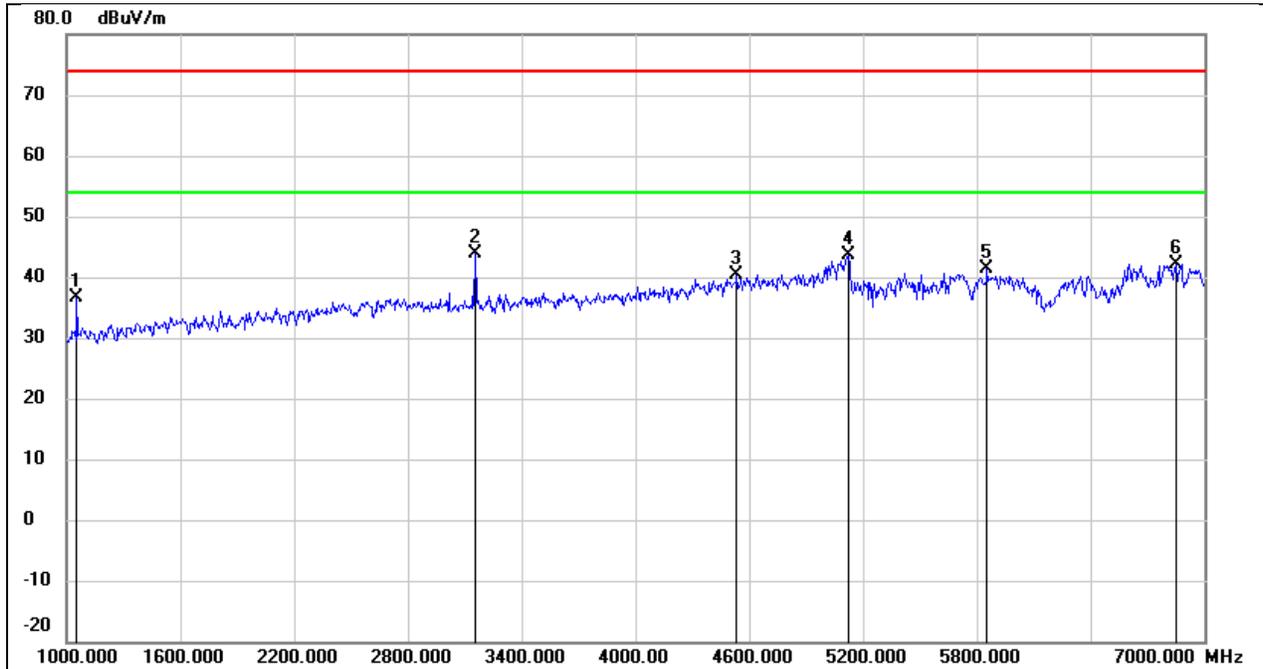


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1054.000	51.35	-14.78	36.57	74.00	-37.43	peak
2	3154.000	50.49	-6.63	43.86	74.00	-30.14	peak
3	4534.000	42.51	-2.01	40.50	74.00	-33.50	peak
4	5122.000	43.68	-0.02	43.66	74.00	-30.34	peak
5	5854.000	39.98	1.43	41.41	74.00	-32.59	peak
6	6850.000	36.75	5.46	42.21	74.00	-31.79	peak

Test Mode:	802.11a 20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 3.3V

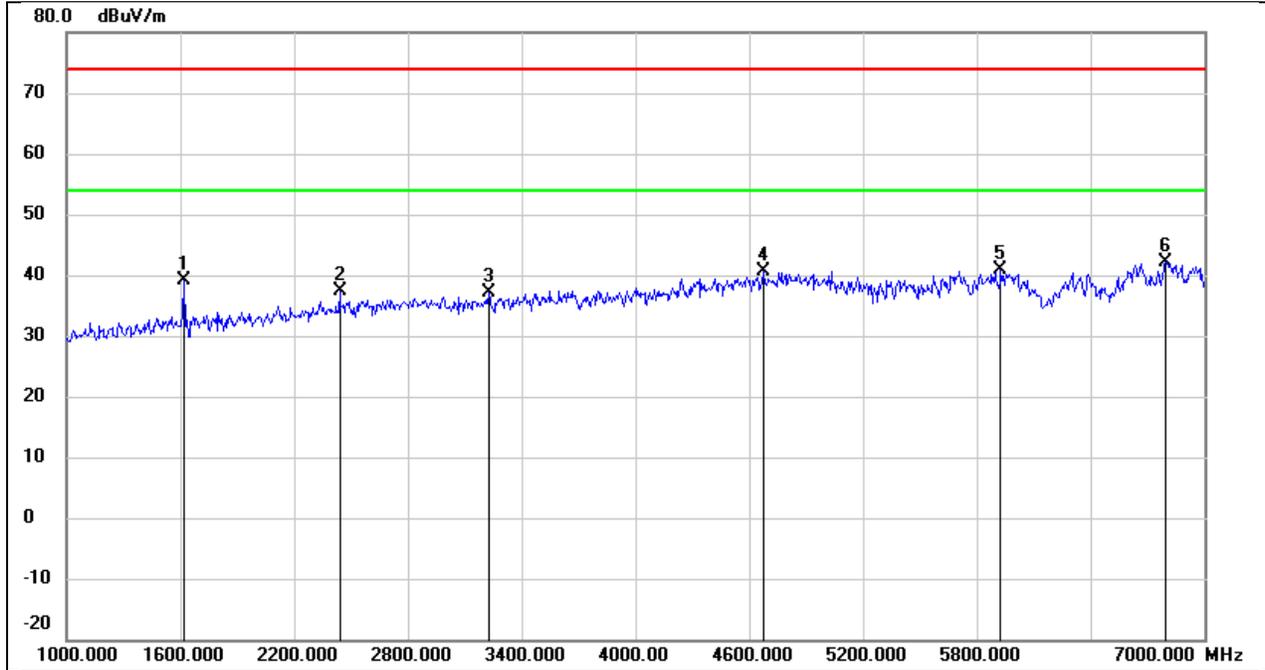


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1618.000	51.50	-12.32	39.18	74.00	-34.82	peak
2	2440.000	46.20	-8.80	37.40	74.00	-36.60	peak
3	3226.000	43.62	-6.47	37.15	74.00	-36.85	peak
4	4672.000	42.08	-1.46	40.62	74.00	-33.38	peak
5	5926.000	39.14	1.64	40.78	74.00	-33.22	peak
6	6796.000	36.96	5.19	42.15	74.00	-31.85	peak

Test Mode:	802.11a 20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

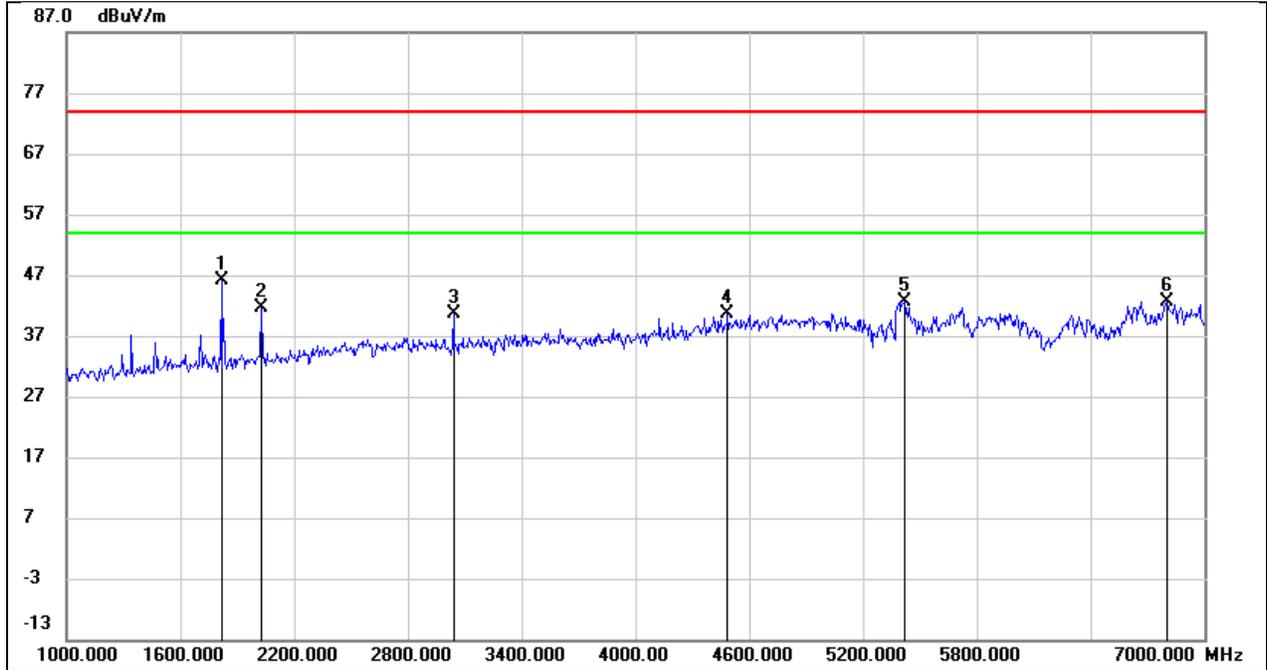


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1816.000	57.75	-11.67	46.08	74.00	-27.92	peak
2	2026.000	52.52	-10.92	41.60	74.00	-32.40	peak
3	3040.000	47.64	-6.89	40.75	74.00	-33.25	peak
4	4486.000	42.87	-2.21	40.66	74.00	-33.34	peak
5	5416.000	42.37	0.32	42.69	74.00	-31.31	peak
6	6802.000	37.53	5.21	42.74	74.00	-31.26	peak

Test Mode:	802.11a 20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.3V

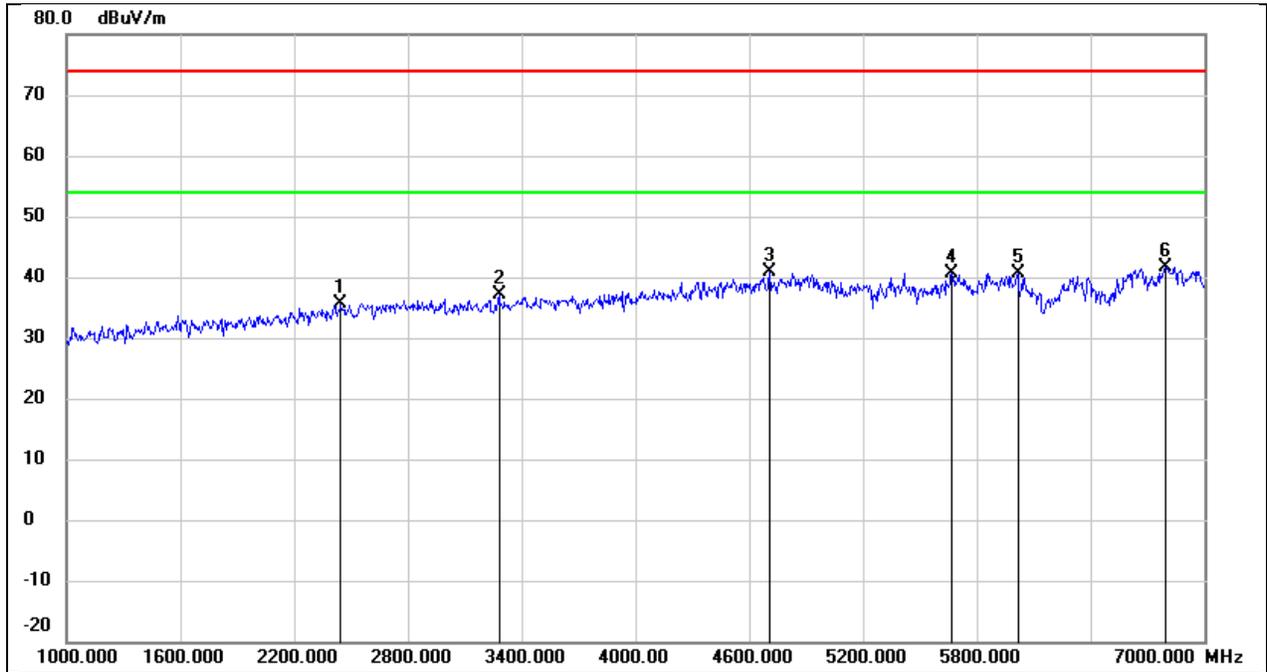


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2446.000	44.42	-8.77	35.65	74.00	-38.35	peak
2	3280.000	43.50	-6.35	37.15	74.00	-36.85	peak
3	4708.000	42.27	-1.31	40.96	74.00	-33.04	peak
4	5668.000	39.76	0.91	40.67	74.00	-33.33	peak
5	6016.000	38.79	1.91	40.70	74.00	-33.30	peak
6	6796.000	36.48	5.19	41.67	74.00	-32.33	peak

Test Mode:	802.11a 20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.3V

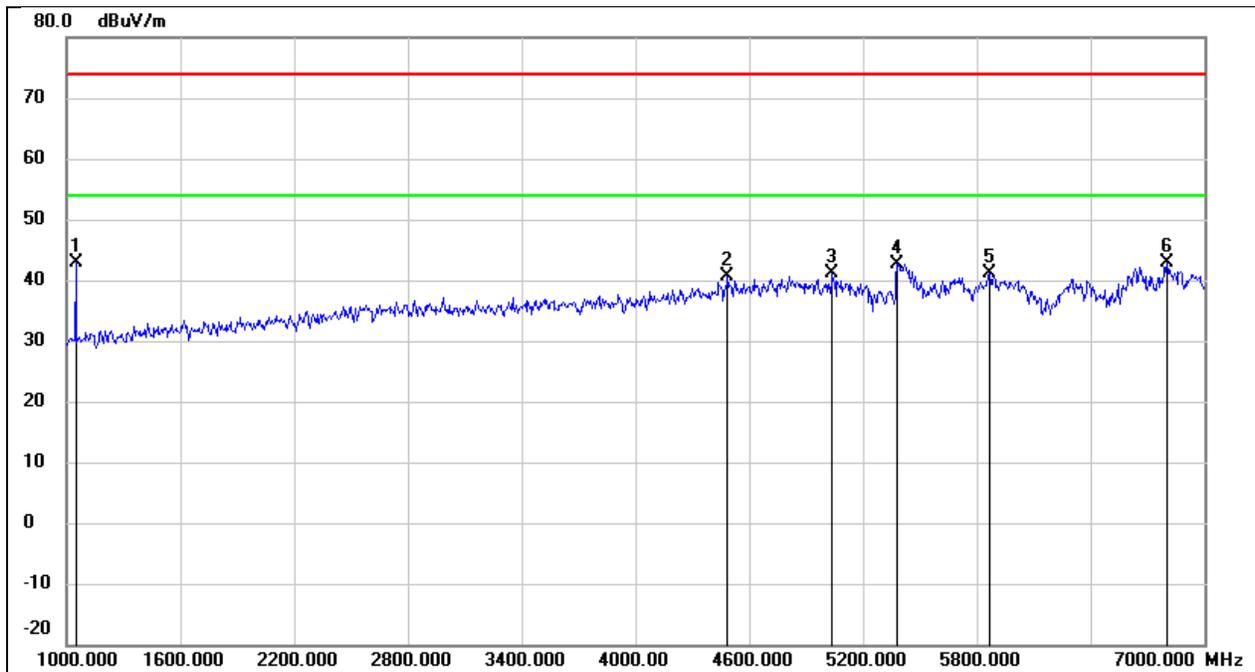


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1048.000	57.64	-14.81	42.83	74.00	-31.17	peak
2	4486.000	42.86	-2.21	40.65	74.00	-33.35	peak
3	5038.000	41.17	-0.11	41.06	74.00	-32.94	peak
4	5380.000	42.43	0.29	42.72	74.00	-31.28	peak
5	5866.000	39.73	1.47	41.20	74.00	-32.80	peak
6	6802.000	37.63	5.21	42.84	74.00	-31.16	peak

Test Mode:	802.11a 20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.3V

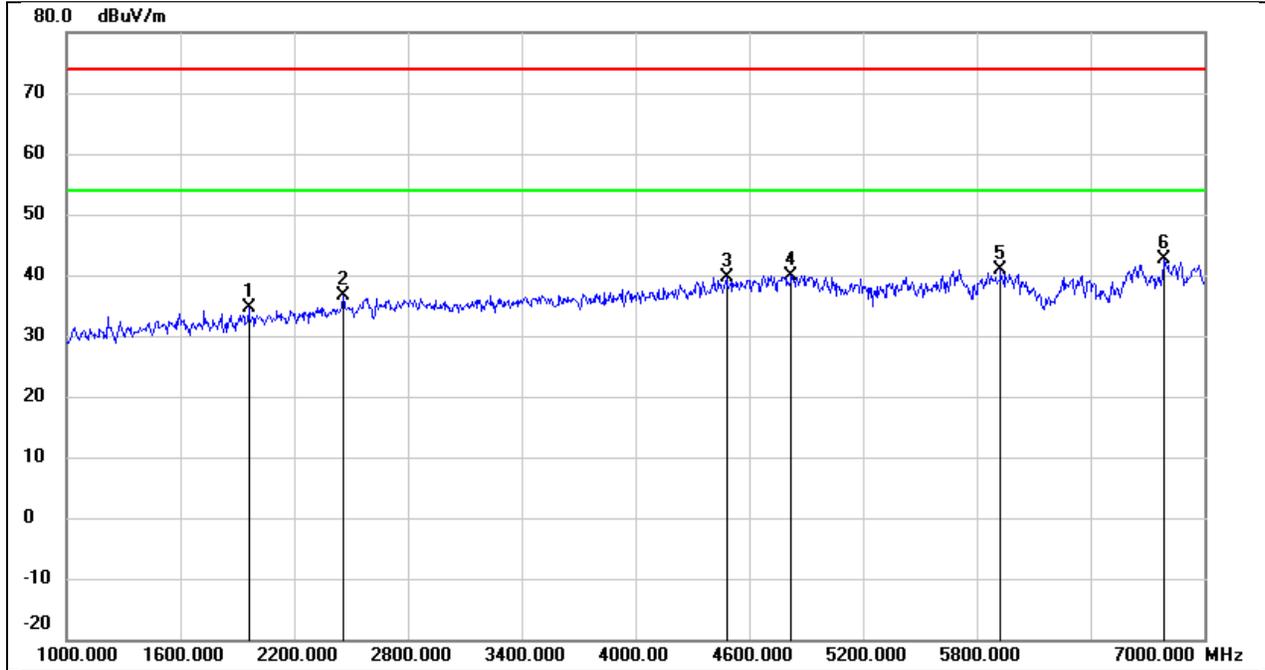


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1960.000	45.86	-11.20	34.66	74.00	-39.34	peak
2	2458.000	45.39	-8.71	36.68	74.00	-37.32	peak
3	4480.000	41.92	-2.23	39.69	74.00	-34.31	peak
4	4822.000	40.85	-0.85	40.00	74.00	-34.00	peak
5	5926.000	39.14	1.64	40.78	74.00	-33.22	peak
6	6790.000	37.45	5.15	42.60	74.00	-31.40	peak

Test Mode:	802.11a 20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

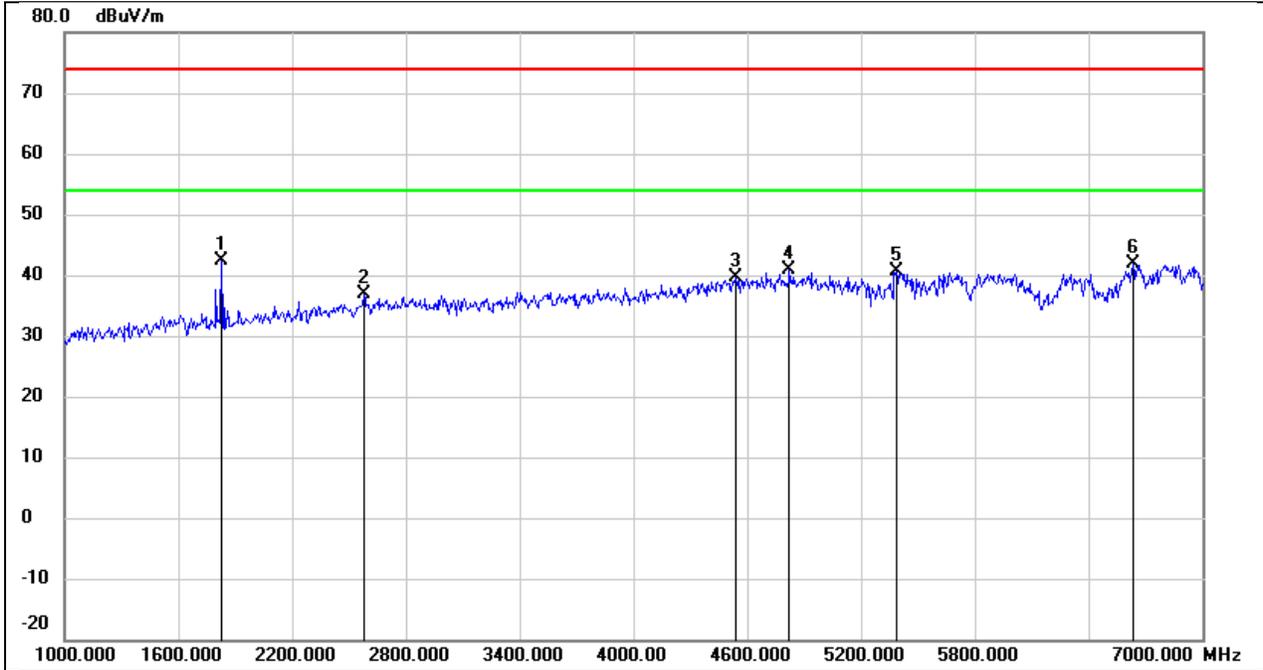


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1828.000	53.88	-11.62	42.26	74.00	-31.74	peak
2	2578.000	45.07	-8.26	36.81	74.00	-37.19	peak
3	4540.000	41.67	-1.97	39.70	74.00	-34.30	peak
4	4822.000	41.71	-0.85	40.86	74.00	-33.14	peak
5	5386.000	40.44	0.29	40.73	74.00	-33.27	peak
6	6634.000	37.55	4.38	41.93	74.00	-32.07	peak

Test Mode:	802.11a 20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.3V

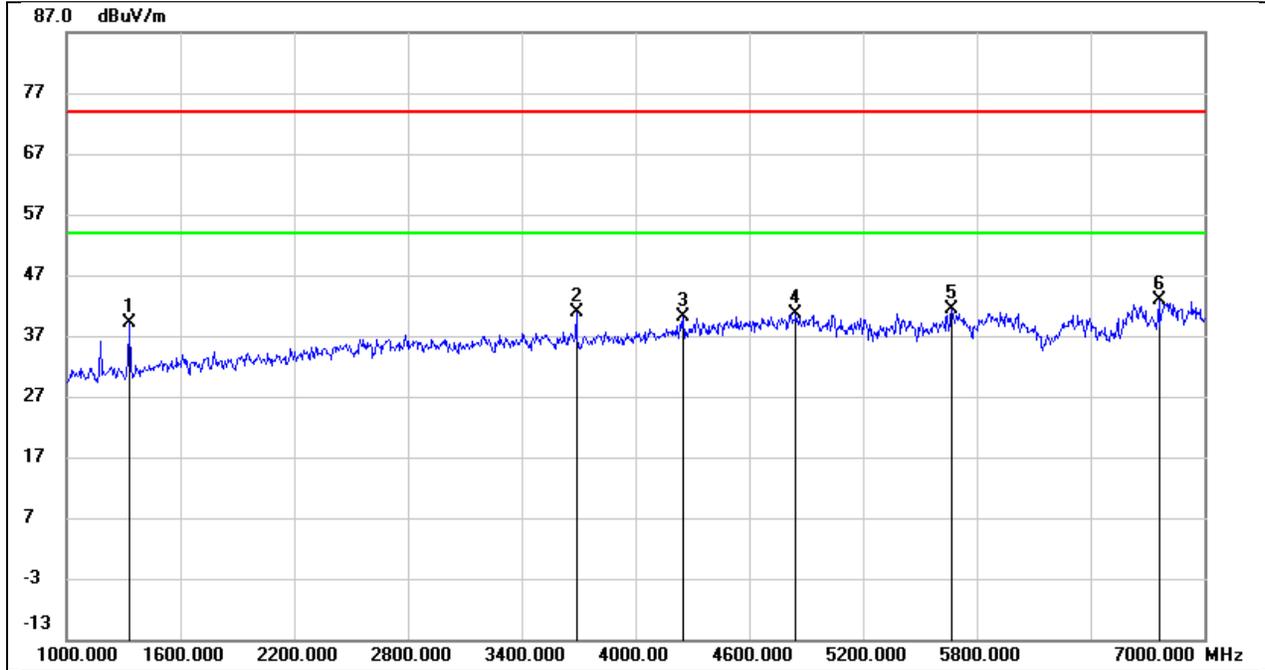


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1330.000	52.61	-13.50	39.11	74.00	-34.89	peak
2	3688.000	46.27	-5.33	40.94	74.00	-33.06	peak
3	4252.000	43.50	-3.30	40.20	74.00	-33.80	peak
4	4846.000	41.30	-0.77	40.53	74.00	-33.47	peak
5	5668.000	40.43	0.91	41.34	74.00	-32.66	peak
6	6760.000	37.98	5.02	43.00	74.00	-31.00	peak

Test Mode:	802.11a 20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

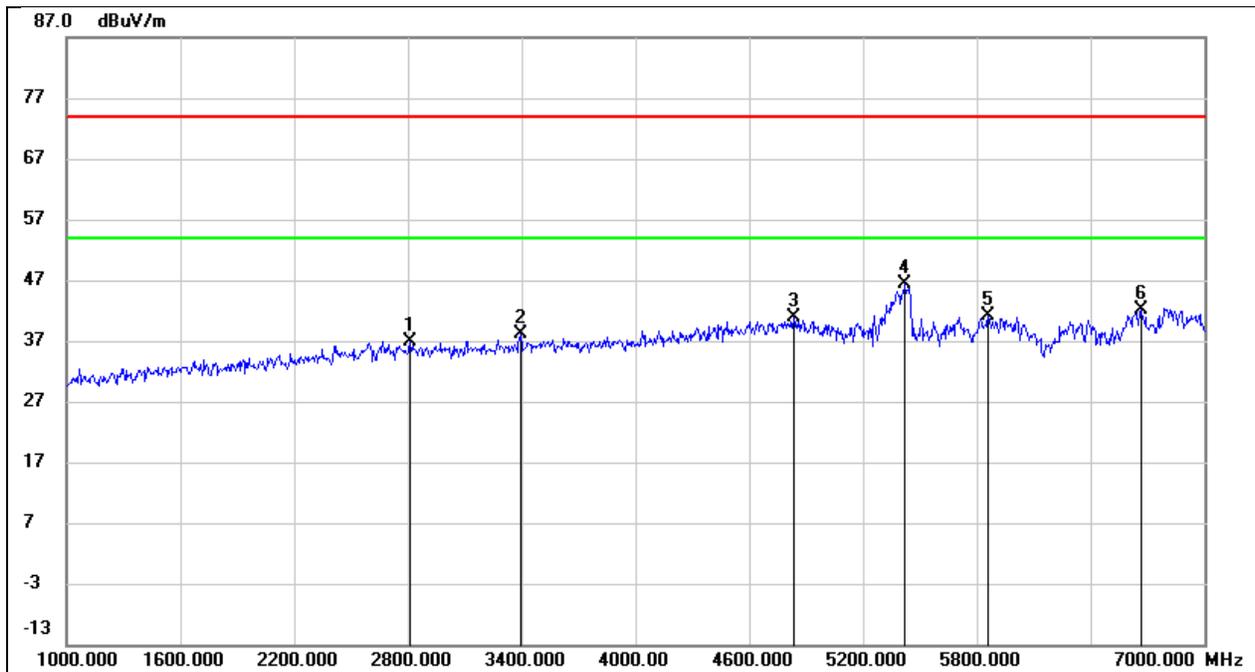


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2812.000	44.45	-7.55	36.90	74.00	-37.10	peak
2	3394.000	44.24	-6.09	38.15	74.00	-35.85	peak
3	4834.000	41.72	-0.81	40.91	74.00	-33.09	peak
4	5422.000	45.94	0.32	46.26	74.00	-27.74	peak
5	5860.000	39.60	1.45	41.05	74.00	-32.95	peak
6	6664.000	37.59	4.54	42.13	74.00	-31.87	peak

Test Mode:	802.11a 20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.3V

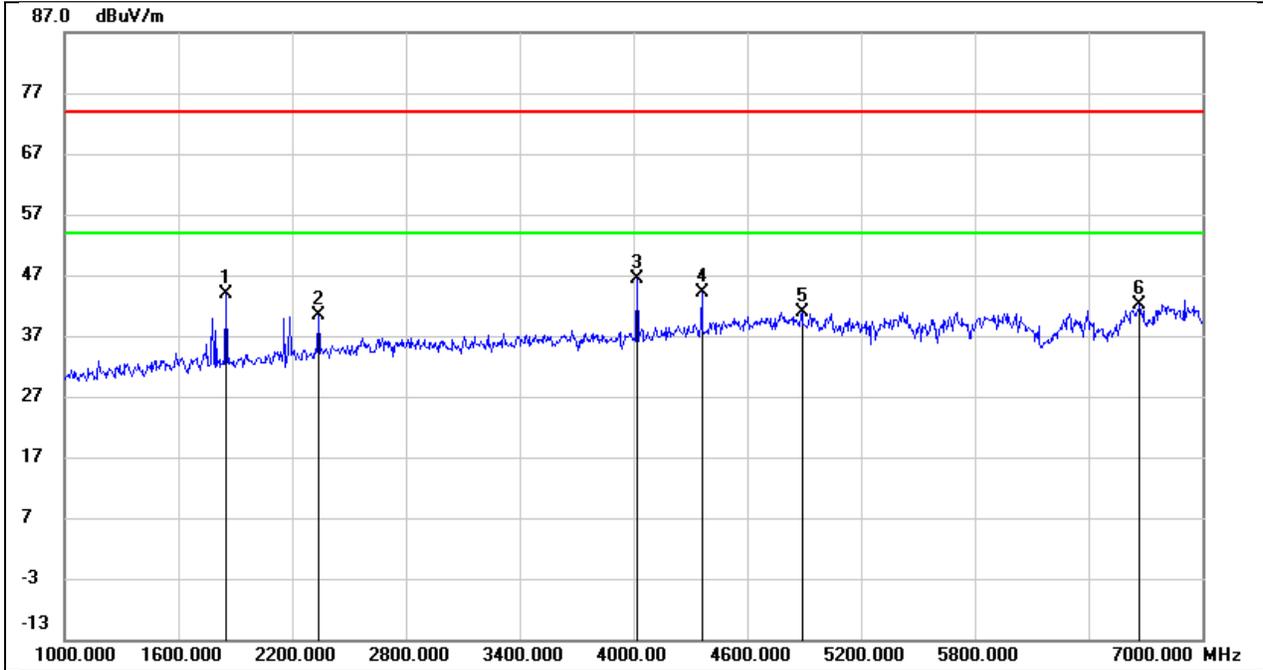


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1852.000	55.45	-11.55	43.90	74.00	-30.10	peak
2	2338.000	49.60	-9.32	40.28	74.00	-33.72	peak
3	4018.000	50.72	-4.39	46.33	74.00	-27.67	peak
4	4360.000	47.00	-2.80	44.20	74.00	-29.80	peak
5	4888.000	41.59	-0.60	40.99	74.00	-33.01	peak
6	6670.000	37.67	4.57	42.24	74.00	-31.76	peak

Test Mode:	802.11a 20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.3V

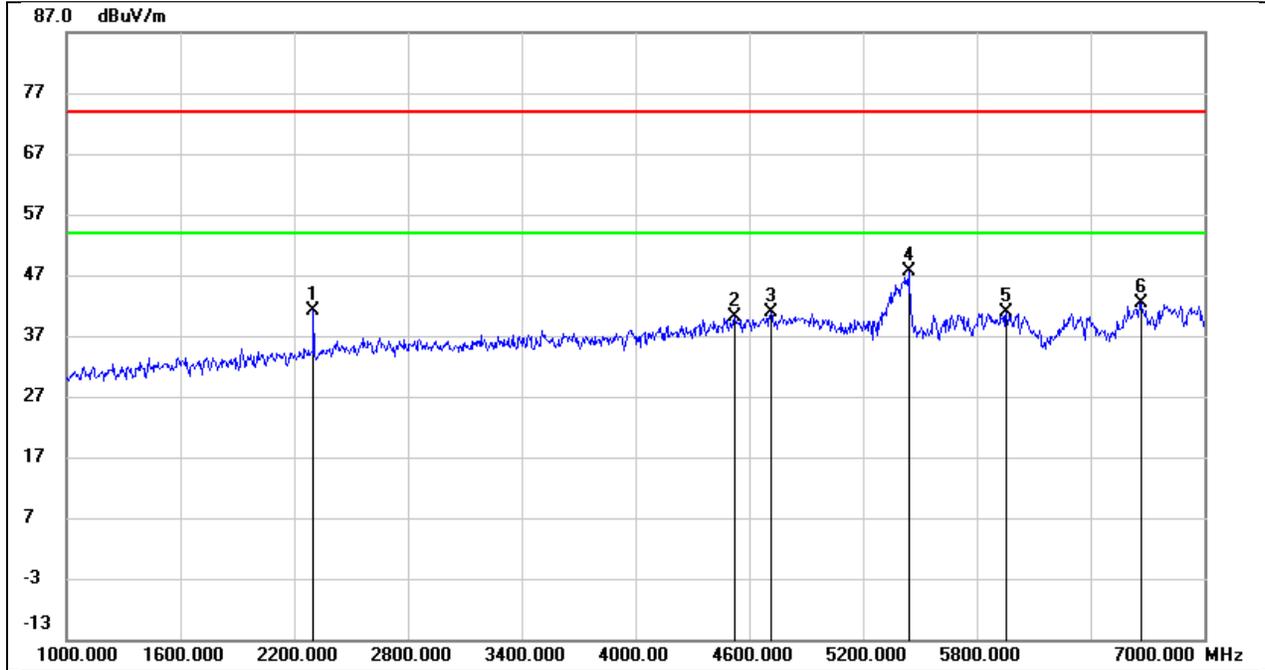


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2302.000	50.60	-9.50	41.10	74.00	-32.90	peak
2	4522.000	42.19	-2.05	40.14	74.00	-33.86	peak
3	4714.000	42.11	-1.29	40.82	74.00	-33.18	peak
4	5440.000	47.38	0.35	47.73	74.00	-26.27	peak
5	5956.000	39.14	1.73	40.87	74.00	-33.13	peak
6	6664.000	37.81	4.54	42.35	74.00	-31.65	peak

Test Mode:	802.11a 20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.3V

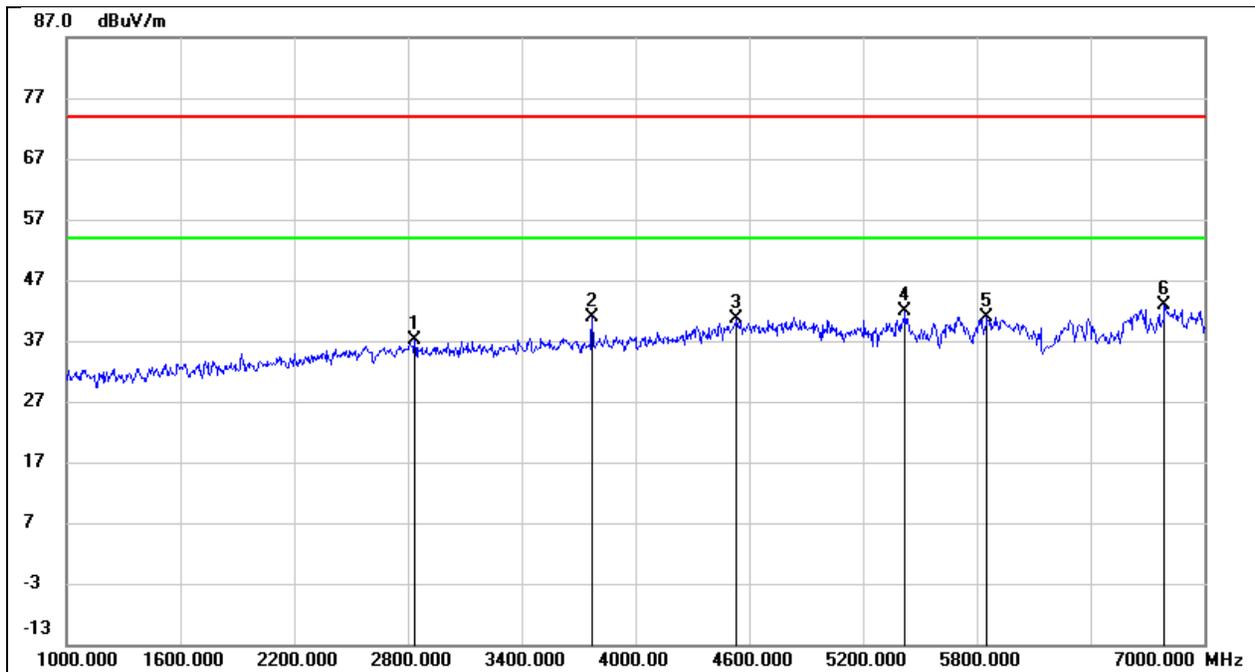


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2836.000	44.59	-7.48	37.11	74.00	-36.89	peak
2	3772.000	46.07	-5.11	40.96	74.00	-33.04	peak
3	4534.000	42.52	-2.01	40.51	74.00	-33.49	peak
4	5422.000	41.54	0.32	41.86	74.00	-32.14	peak
5	5854.000	39.43	1.43	40.86	74.00	-33.14	peak
6	6790.000	37.77	5.15	42.92	74.00	-31.08	peak

Test Mode:	802.11a 20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3V

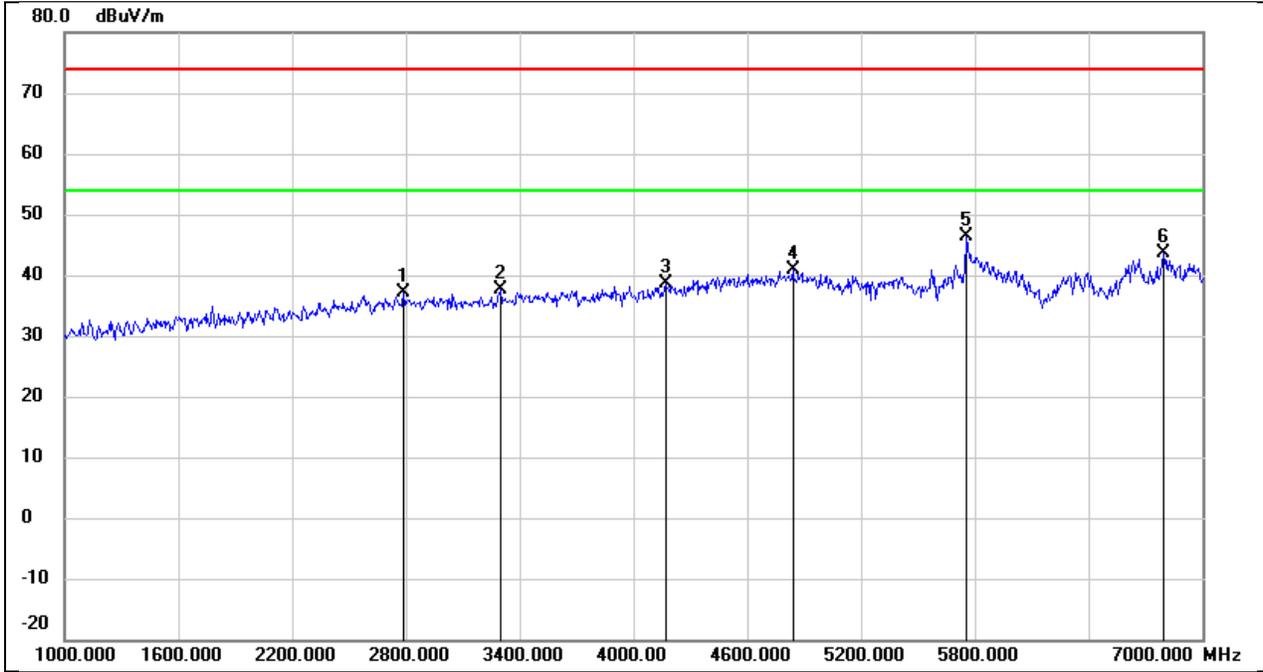


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2788.000	44.72	-7.62	37.10	74.00	-36.90	peak
2	3298.000	43.81	-6.30	37.51	74.00	-36.49	peak
3	4168.000	42.31	-3.69	38.62	74.00	-35.38	peak
4	4840.000	41.65	-0.78	40.87	74.00	-33.13	peak
5	5758.000	45.27	1.16	46.43	74.00	-27.57	peak
6	6796.000	38.54	5.19	43.73	74.00	-30.27	peak

Test Mode:	802.11a 20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.3V

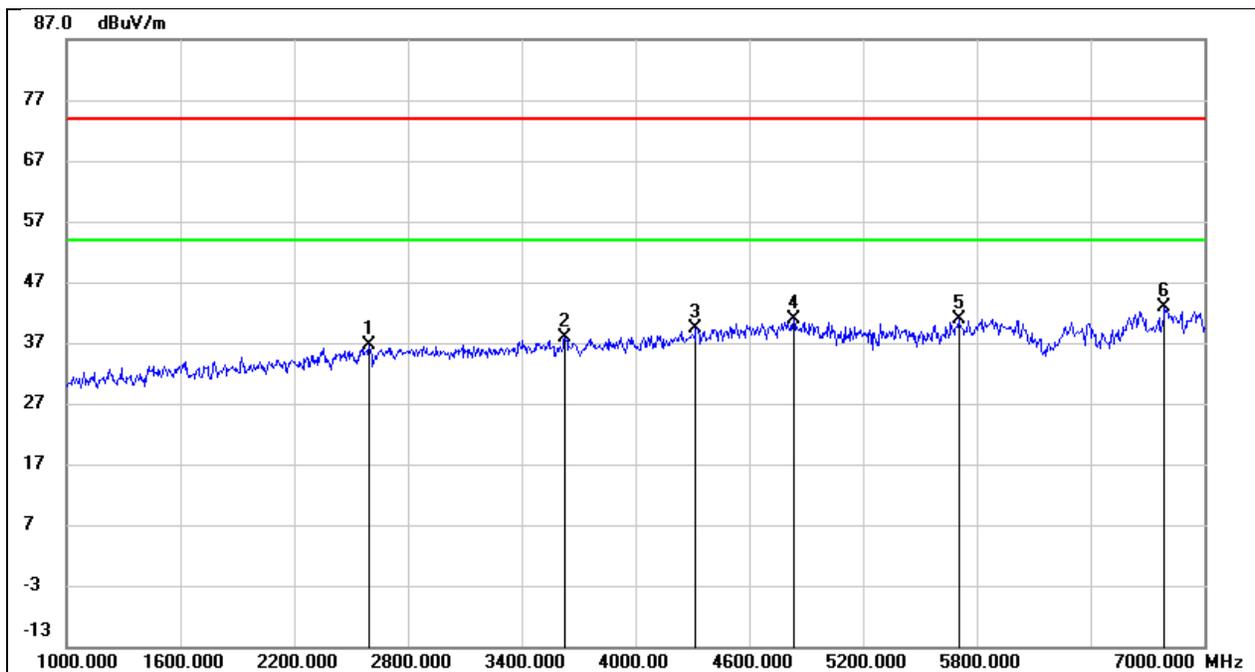


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2596.000	44.81	-8.20	36.61	74.00	-37.39	peak
2	3628.000	43.27	-5.50	37.77	74.00	-36.23	peak
3	4318.000	42.44	-2.99	39.45	74.00	-34.55	peak
4	4834.000	41.64	-0.81	40.83	74.00	-33.17	peak
5	5700.000	39.90	1.00	40.90	/	/	fundamental
6	6790.000	37.65	5.15	42.80	74.00	-31.20	peak

Test Mode:	802.11a 20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3V

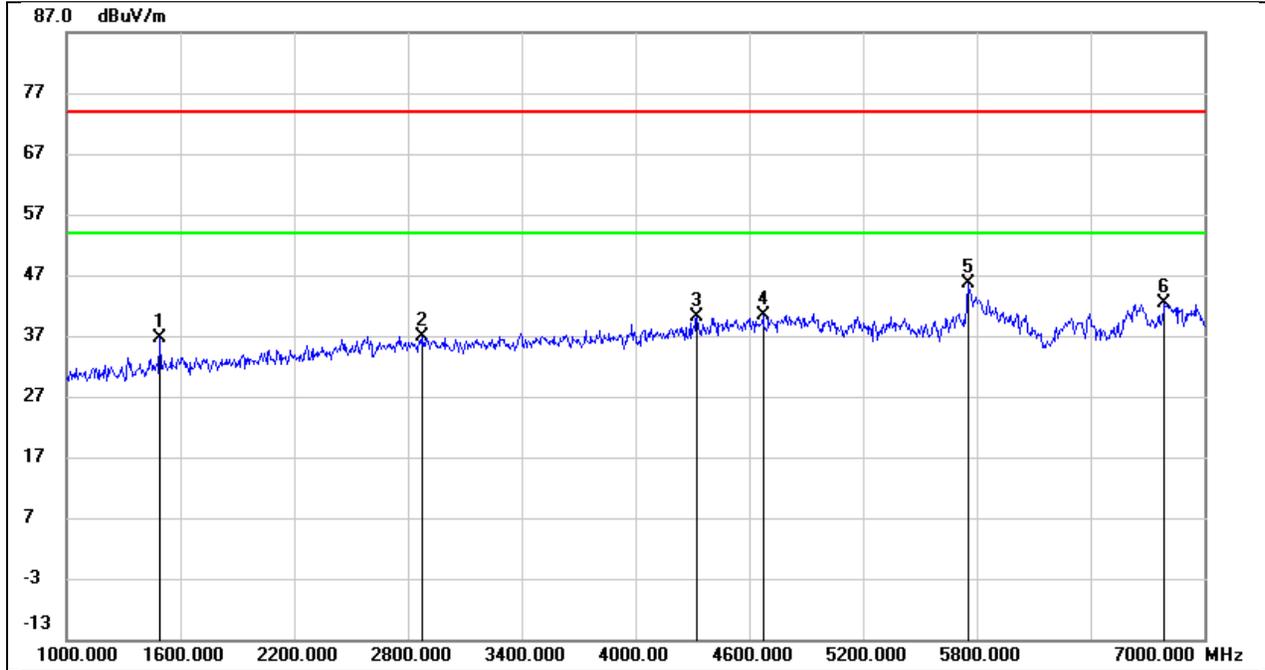


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1492.000	49.27	-12.75	36.52	74.00	-37.48	peak
2	2878.000	44.31	-7.35	36.96	74.00	-37.04	peak
3	4324.000	43.16	-2.96	40.20	74.00	-33.80	peak
4	4672.000	41.92	-1.46	40.46	74.00	-33.54	peak
5	5752.000	44.59	1.14	45.73	74.00	-28.27	peak
6	6790.000	37.30	5.15	42.45	74.00	-31.55	peak

Test Mode:	802.11a 20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3V

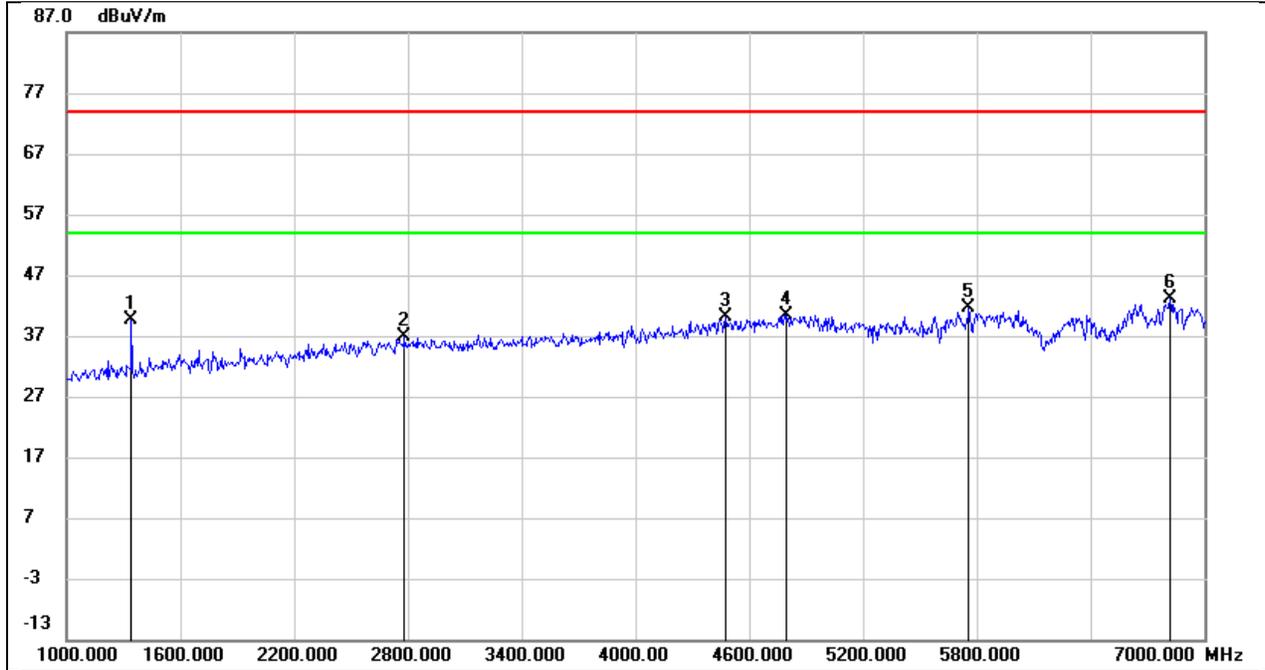


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1342.000	53.11	-13.45	39.66	74.00	-34.34	peak
2	2782.000	44.60	-7.63	36.97	74.00	-37.03	peak
3	4474.000	42.38	-2.26	40.12	74.00	-33.88	peak
4	4792.000	41.42	-0.98	40.44	74.00	-33.56	peak
5	5758.000	40.37	1.16	41.53	74.00	-32.47	peak
6	6820.000	37.75	5.31	43.06	74.00	-30.94	peak

Test Mode:	802.11a 20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

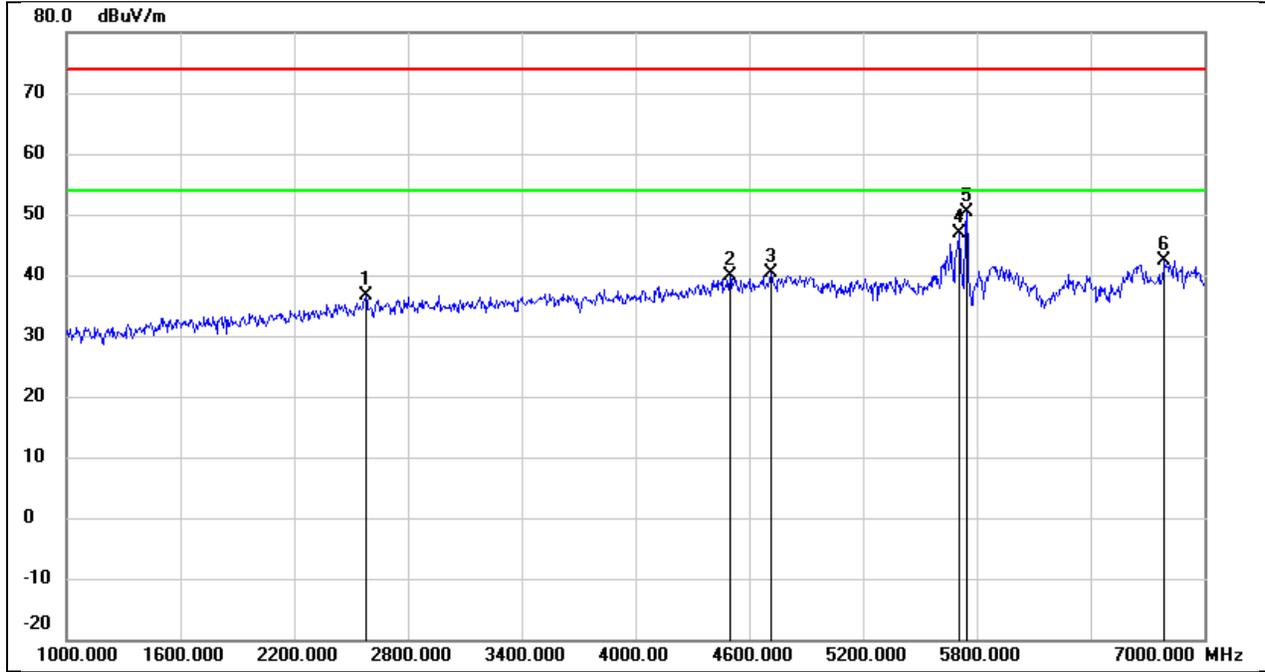


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2578.000	44.81	-8.26	36.55	74.00	-37.45	peak
2	4498.000	41.91	-2.14	39.77	74.00	-34.23	peak
3	4714.000	41.59	-1.29	40.30	74.00	-33.70	peak
4	5704.000	45.86	1.00	46.86	74.00	-27.14	peak
5	5745.000	49.17	1.12	50.29	/	/	fundamental
6	6790.000	37.23	5.15	42.38	74.00	-31.62	peak

Test Mode:	802.11a 20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3V

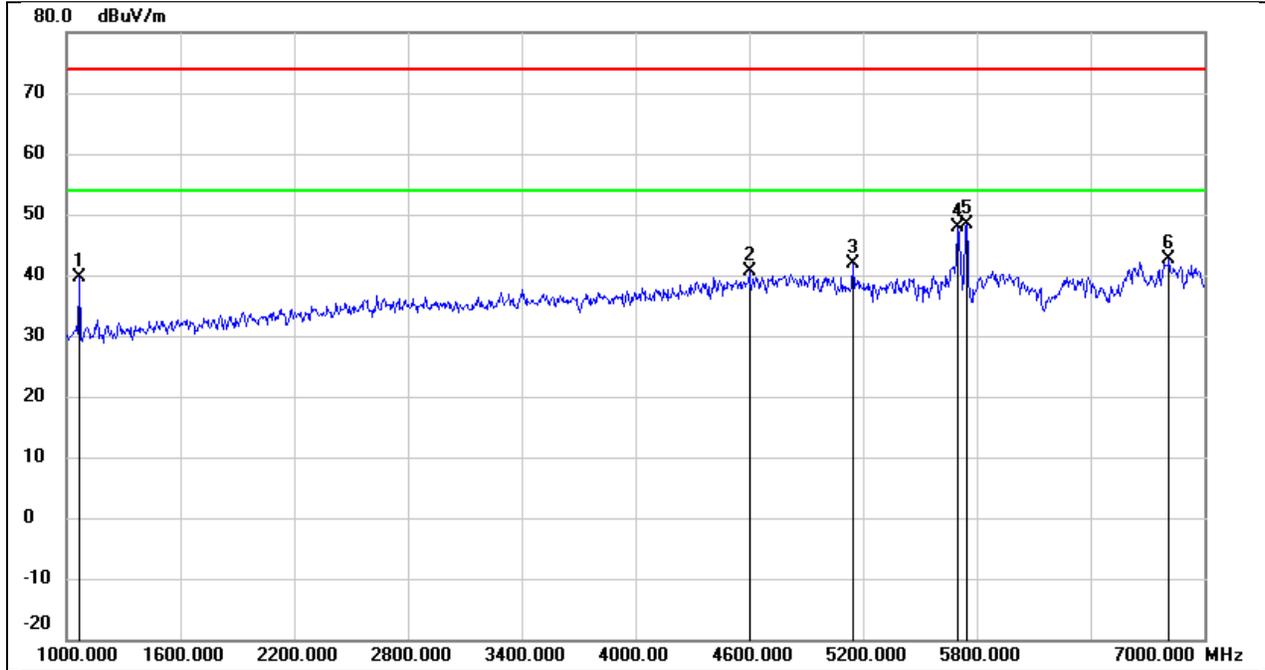


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1066.000	54.41	-14.73	39.68	74.00	-34.32	peak
2	4600.000	42.49	-1.74	40.75	74.00	-33.25	peak
3	5146.000	41.85	0.01	41.86	74.00	-32.14	peak
4	5698.000	46.85	0.99	47.84	74.00	-26.16	peak
5	5745.000	47.30	1.12	48.42	/	/	fundamental
6	6814.000	37.39	5.28	42.67	74.00	-31.33	peak

Test Mode:	802.11a 20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3V

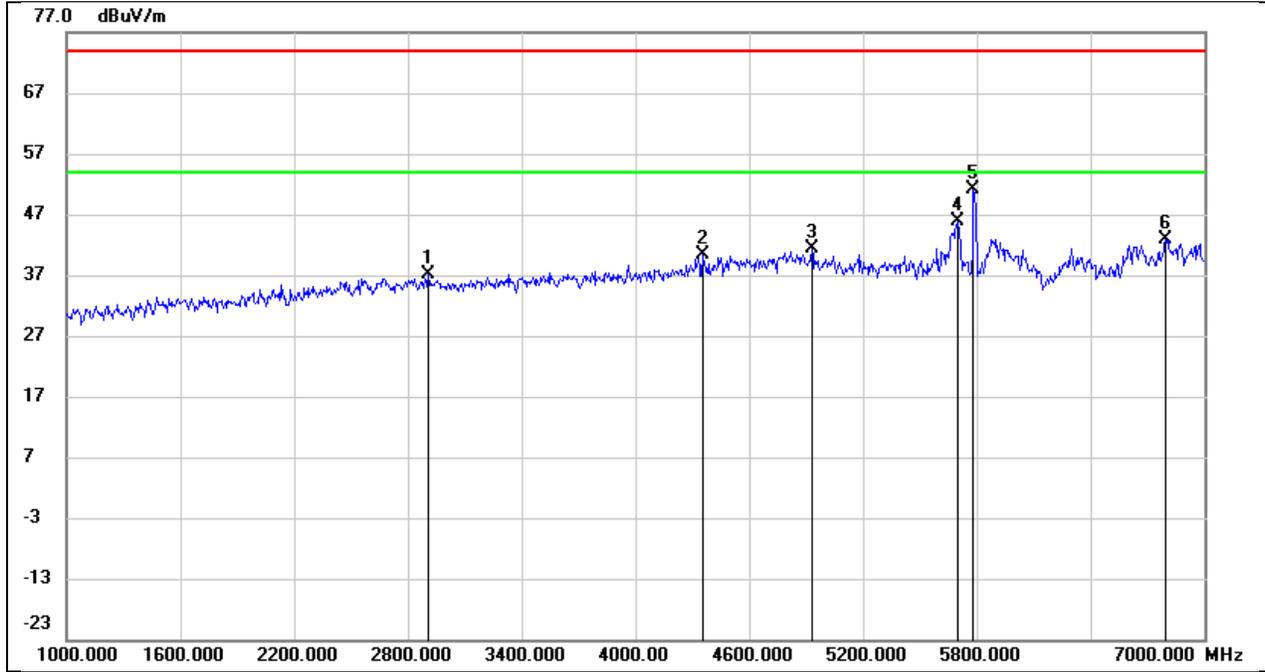


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2908.000	44.43	-7.26	37.17	74.00	-36.83	peak
2	4354.000	43.16	-2.82	40.34	74.00	-33.66	peak
3	4930.000	41.81	-0.43	41.38	74.00	-32.62	peak
4	5698.000	44.93	0.99	45.92	74.00	-28.08	peak
5	5785.000	49.99	1.23	51.22	/	/	fundamental
6	6796.000	37.73	5.19	42.92	74.00	-31.08	peak

Test Mode:	802.11a 20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3V

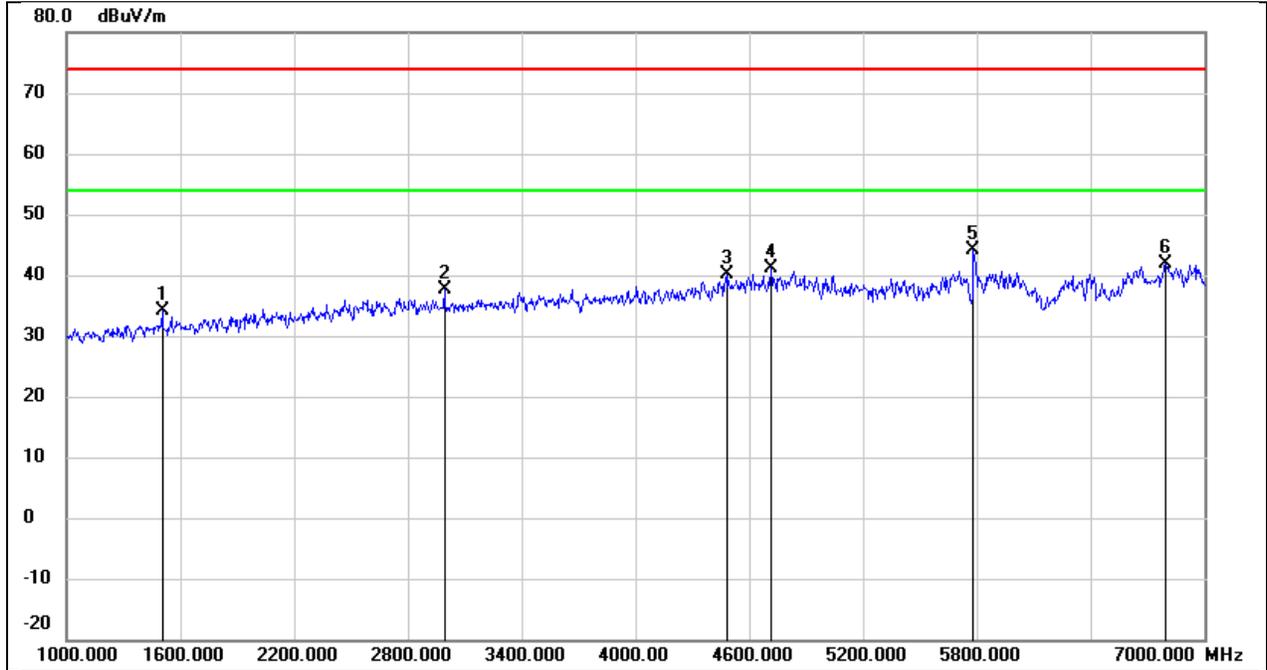


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1504.000	46.92	-12.70	34.22	74.00	-39.78	peak
2	2992.000	44.55	-7.00	37.55	74.00	-36.45	peak
3	4486.000	42.31	-2.21	40.10	74.00	-33.90	peak
4	4714.000	42.37	-1.29	41.08	74.00	-32.92	peak
5	5785.000	42.92	1.23	44.15	/	/	fundamental
6	6796.000	36.74	5.19	41.93	74.00	-32.07	peak

Test Mode:	802.11a 20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

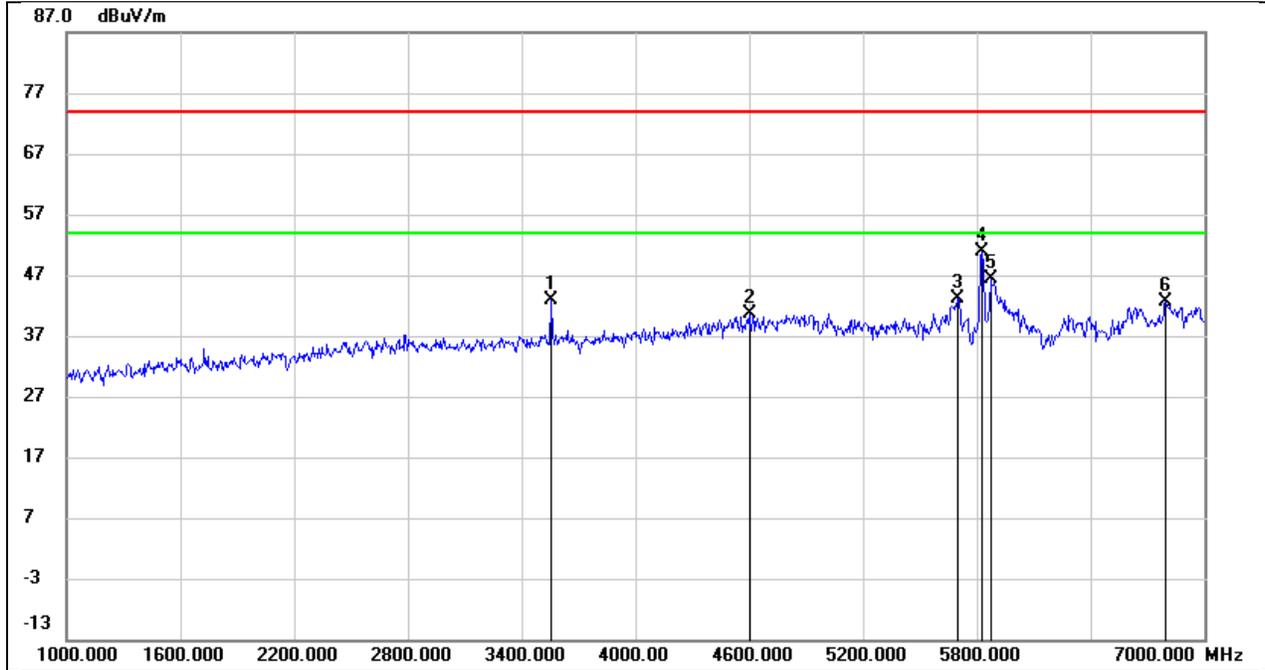

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3556.000	48.57	-5.70	42.87	74.00	-31.13	peak
2	4600.000	42.47	-1.74	40.73	74.00	-33.27	peak
3	5698.000	42.11	0.99	43.10	74.00	-30.90	peak
4	5825.000	49.54	1.36	50.90	/	/	fundamental
5	5872.000	44.83	1.48	46.31	74.00	-27.69	peak
6	6796.000	37.40	5.19	42.59	74.00	-31.41	peak


Test Mode:	802.11a 20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3V

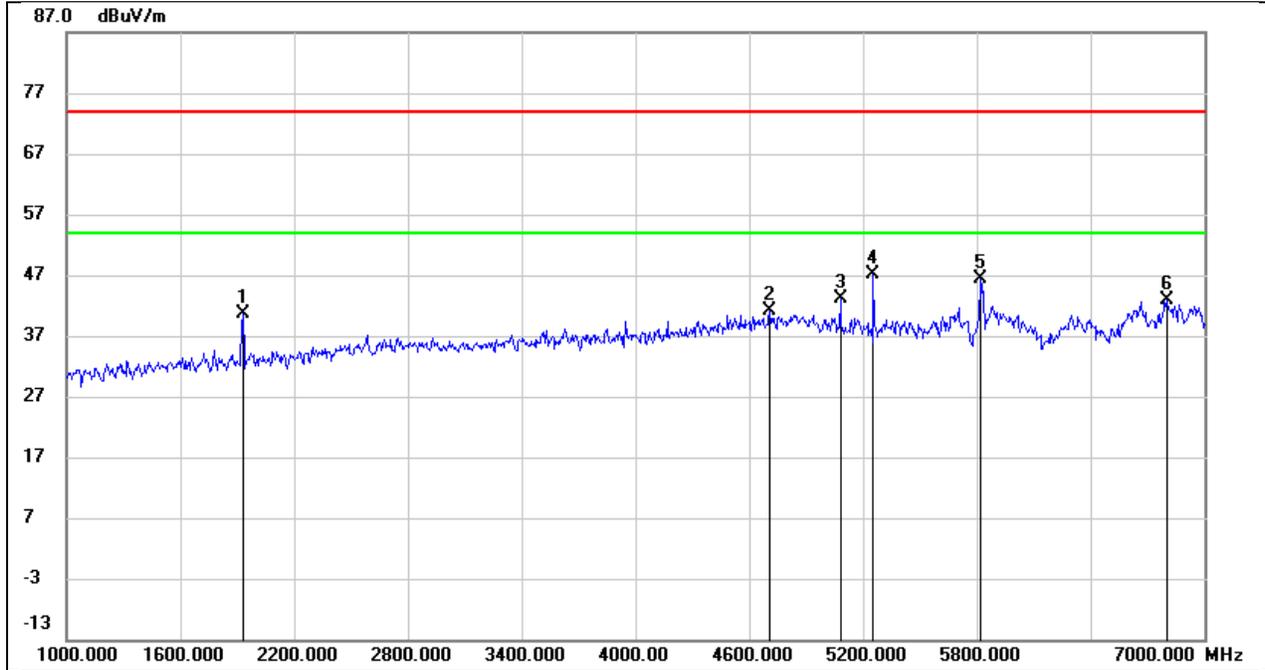

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1930.000	51.86	-11.29	40.57	74.00	-33.43	peak
2	4708.000	42.39	-1.31	41.08	74.00	-32.92	peak
3	5080.000	43.15	-0.06	43.09	74.00	-30.91	peak
4	5254.000	46.93	0.15	47.08	74.00	-26.92	peak
5	5825.000	45.17	1.33	46.50	/	/	fundamental
6	6802.000	37.55	5.21	42.76	74.00	-31.24	peak


8.3. SPURIOUS EMISSIONS(7 GHZ~18 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

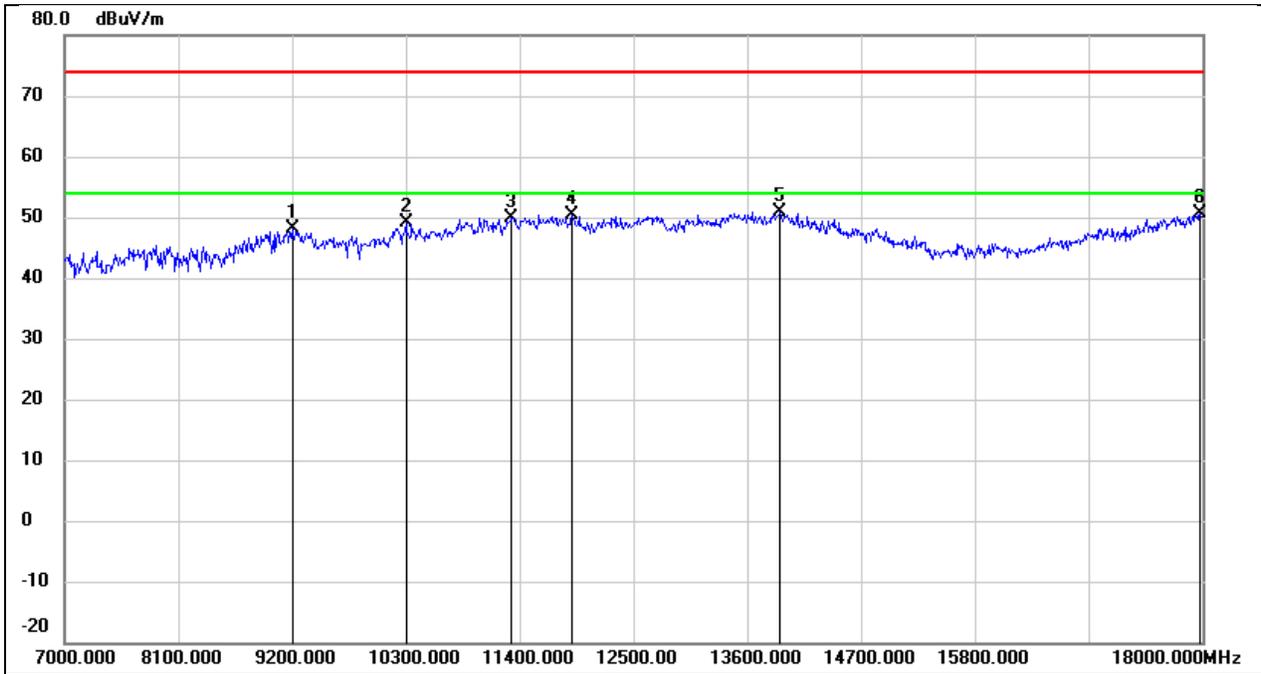


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	37.63	10.46	48.09	74.00	-25.91	peak
2	10300.000	36.63	12.40	49.03	74.00	-24.97	peak
3	11323.000	33.86	16.05	49.91	74.00	-24.09	peak
4	11906.000	32.90	17.52	50.42	74.00	-23.58	peak
5	13919.000	29.23	21.68	50.91	74.00	-23.09	peak
6	17978.000	24.63	25.97	50.60	74.00	-23.40	peak

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

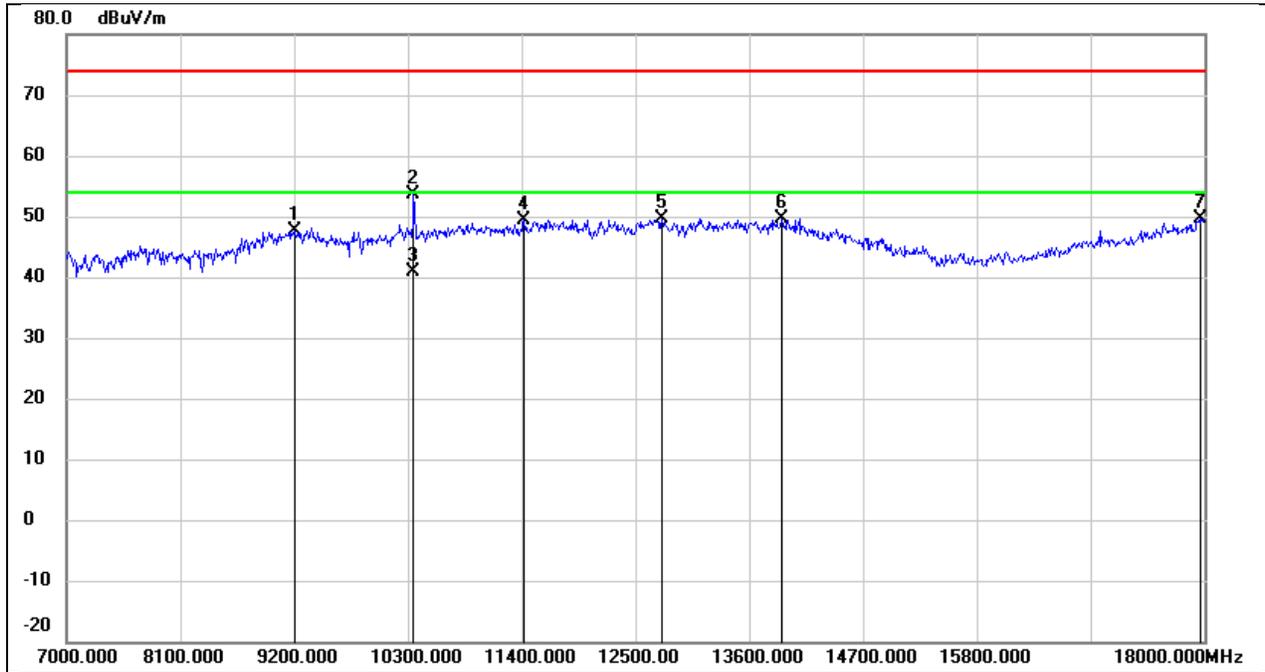


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	37.22	10.47	47.69	74.00	-26.31	peak
2	10355.000	41.02	12.52	53.54	74.00	-20.46	peak
3	10355.000	28.44	12.52	40.96	54.00	-13.04	AVG
4	11422.000	33.00	16.46	49.46	74.00	-24.54	peak
5	12753.000	31.58	18.14	49.72	74.00	-24.28	peak
6	13908.000	27.95	21.66	49.61	74.00	-24.39	peak
7	17956.000	23.81	25.82	49.63	74.00	-24.37	peak

Test Mode:	802.11a 20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 3.3V

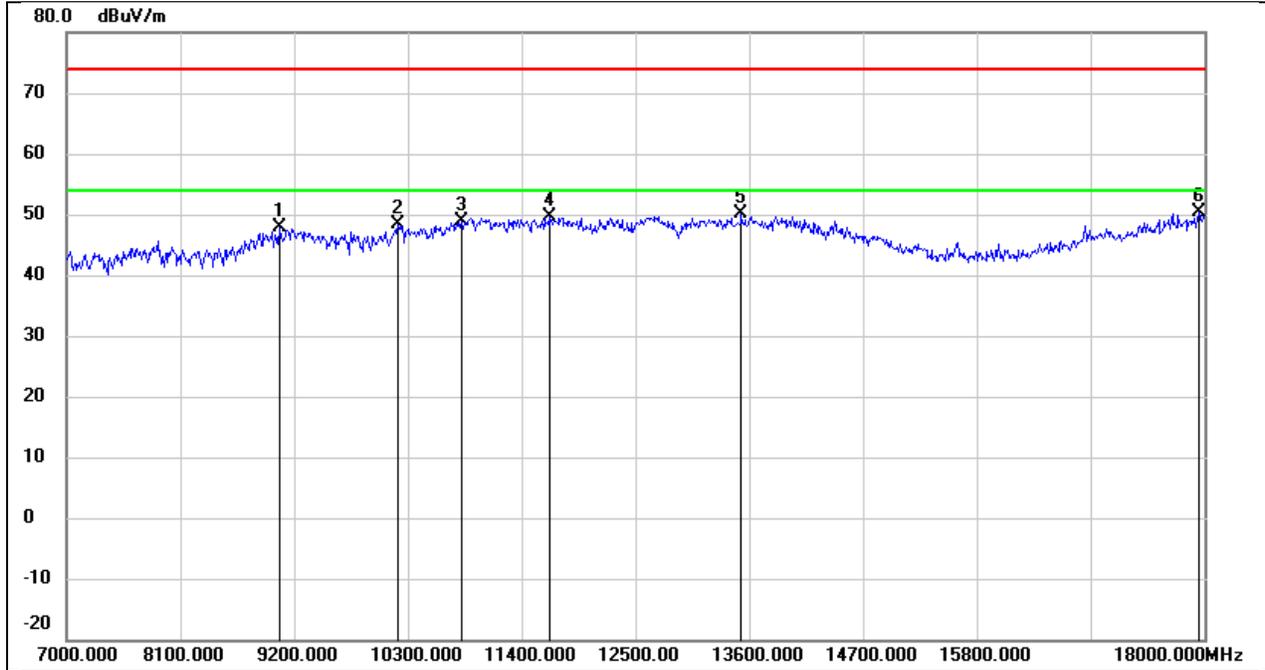


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.61	10.38	47.99	74.00	-26.01	peak
2	10201.000	36.26	12.19	48.45	74.00	-25.55	peak
3	10817.000	34.78	14.03	48.81	74.00	-25.19	peak
4	11664.000	32.52	17.08	49.60	74.00	-24.40	peak
5	13523.000	29.38	20.70	50.08	74.00	-23.92	peak
6	17945.000	24.61	25.75	50.36	74.00	-23.64	peak

Test Mode:	802.11a 20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 3.3V

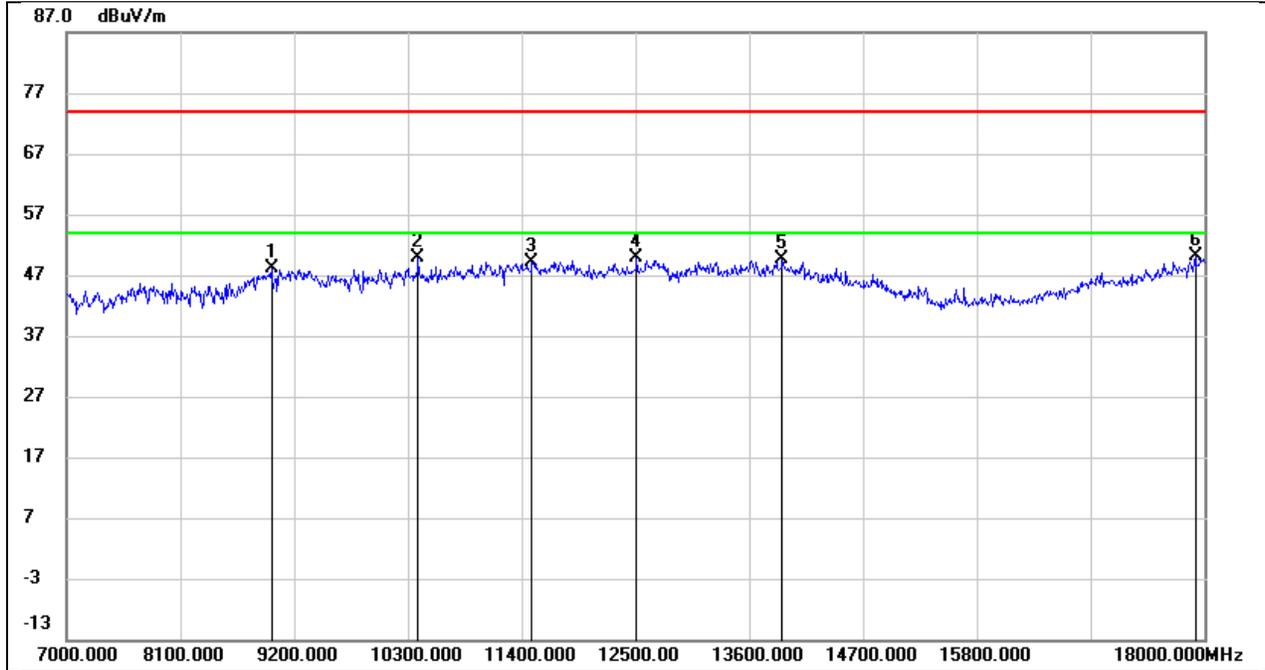


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.87	10.21	48.08	74.00	-25.92	peak
2	10399.000	37.16	12.61	49.77	74.00	-24.23	peak
3	11499.000	32.47	16.77	49.24	74.00	-24.76	peak
4	12511.000	32.08	17.84	49.92	74.00	-24.08	peak
5	13919.000	27.86	21.68	49.54	74.00	-24.46	peak
6	17912.000	24.59	25.52	50.11	74.00	-23.89	peak

Test Mode:	802.11a 20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

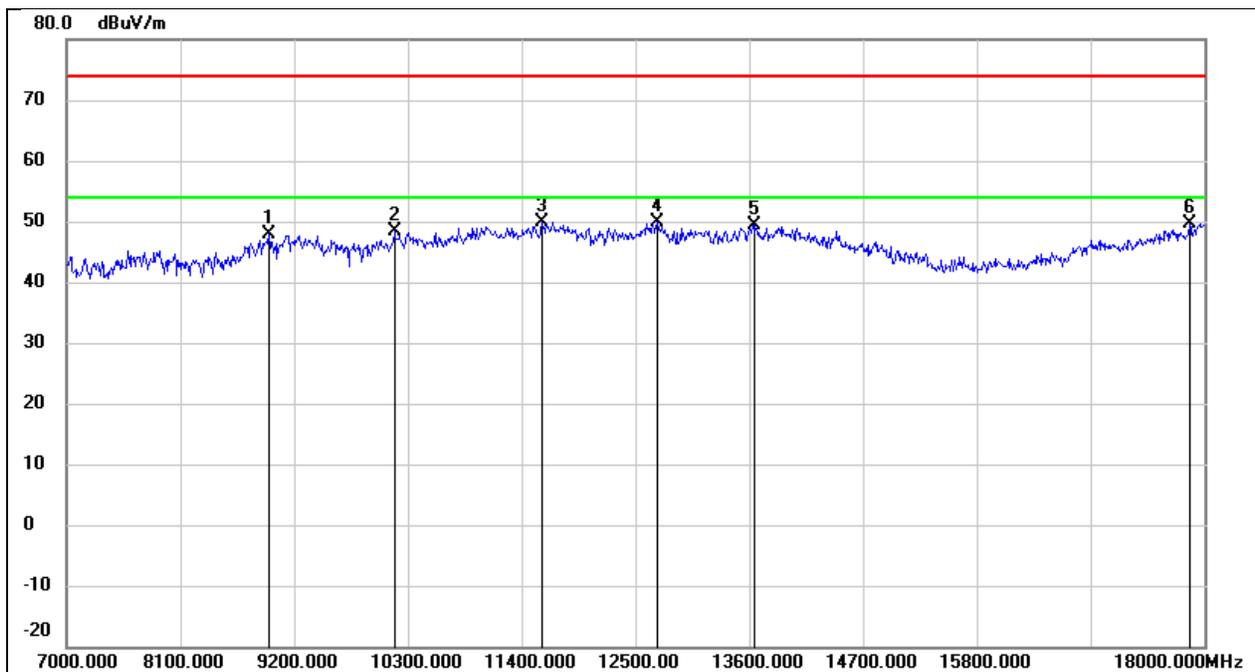


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8958.000	37.77	10.05	47.82	74.00	-26.18	peak
2	10168.000	36.23	12.13	48.36	74.00	-25.64	peak
3	11598.000	33.03	16.96	49.99	74.00	-24.01	peak
4	12709.000	31.91	18.09	50.00	74.00	-24.00	peak
5	13644.000	28.42	20.99	49.41	74.00	-24.59	peak
6	17857.000	24.59	25.14	49.73	74.00	-24.27	peak

Test Mode:	802.11a 20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 3.3V

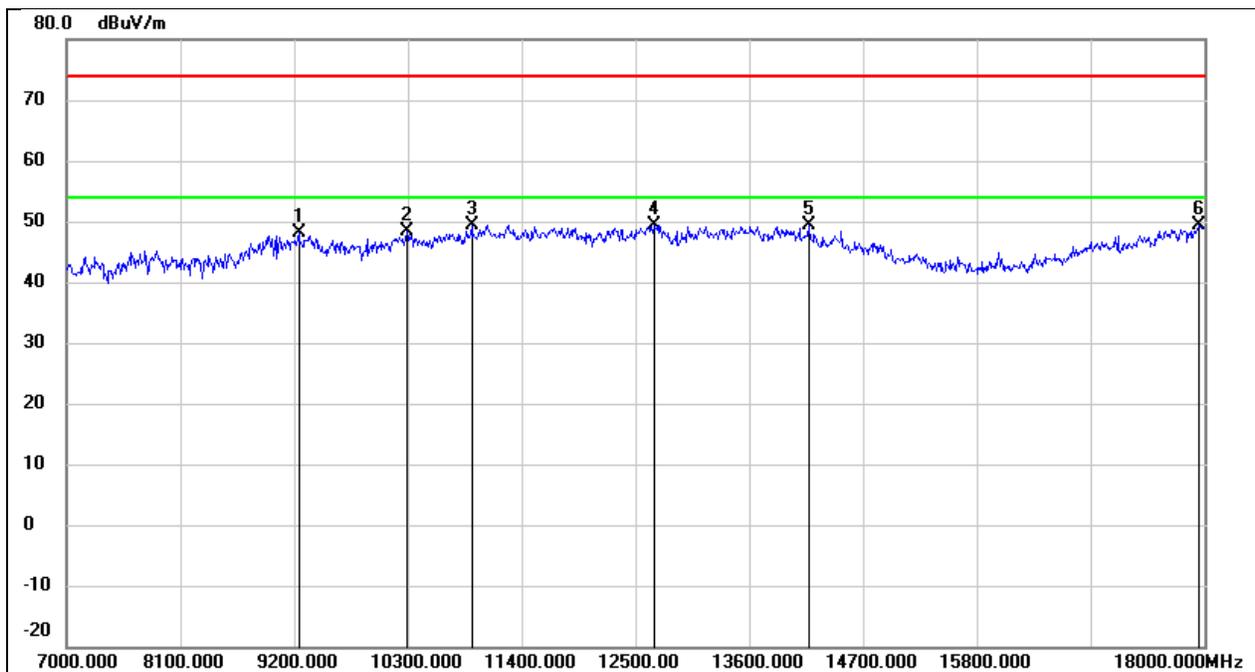


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.56	10.49	48.05	74.00	-25.95	peak
2	10289.000	36.00	12.38	48.38	74.00	-25.62	peak
3	10916.000	35.01	14.39	49.40	74.00	-24.60	peak
4	12676.000	31.42	18.05	49.47	74.00	-24.53	peak
5	14172.000	28.18	21.16	49.34	74.00	-24.66	peak
6	17945.000	23.64	25.75	49.39	74.00	-24.61	peak

Test Mode:	802.11a 20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

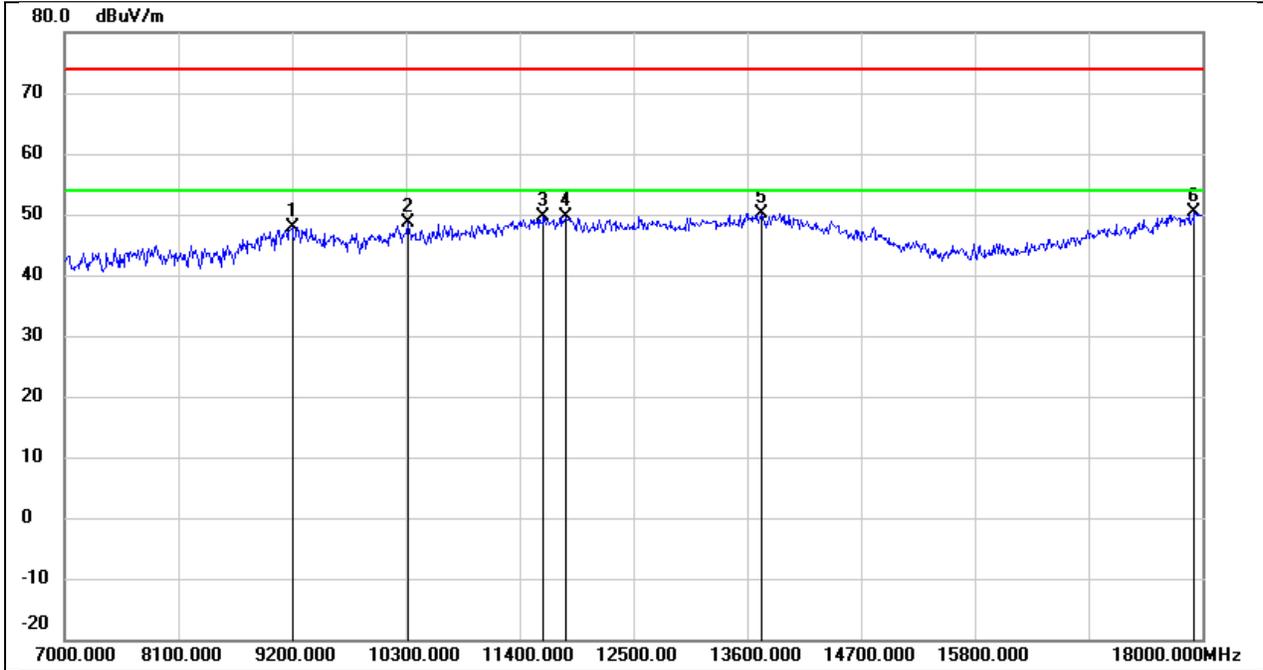


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	37.38	10.46	47.84	74.00	-26.16	peak
2	10322.000	36.22	12.45	48.67	74.00	-25.33	peak
3	11631.000	32.52	17.01	49.53	74.00	-24.47	peak
4	11851.000	32.26	17.43	49.69	74.00	-24.31	peak
5	13743.000	28.91	21.24	50.15	74.00	-23.85	peak
6	17923.000	24.88	25.60	50.48	74.00	-23.52	peak

Test Mode:	802.11a 20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.3V

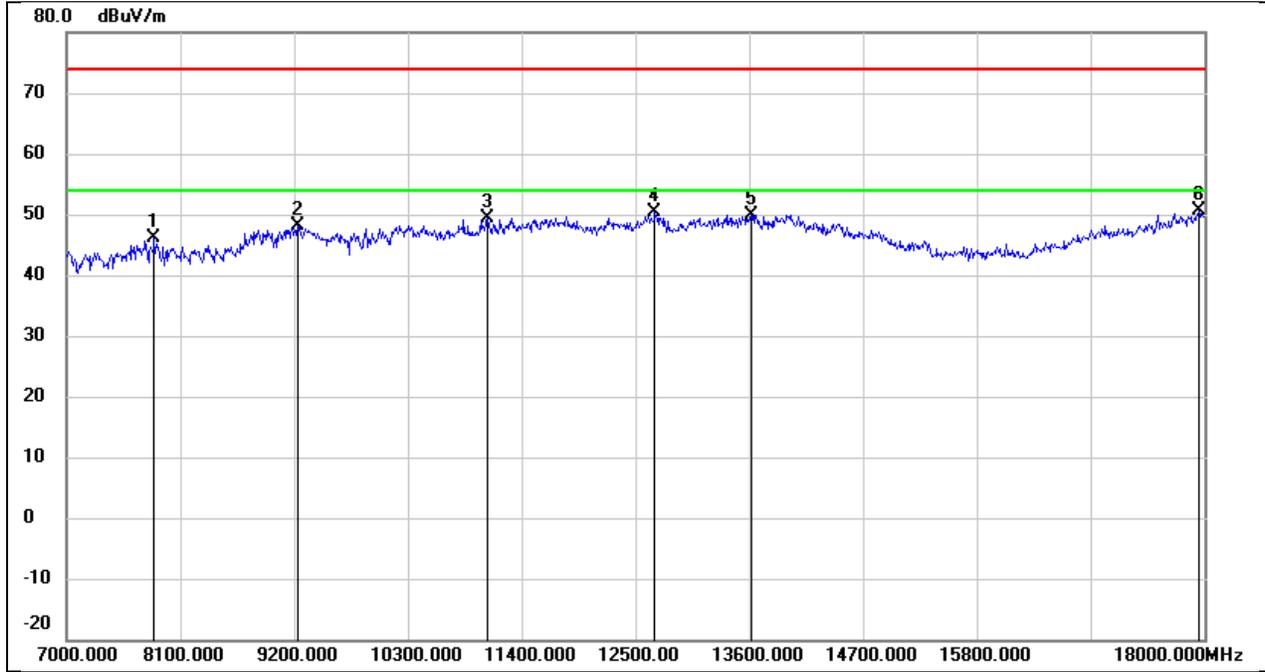


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7847.000	39.51	6.57	46.08	74.00	-27.92	peak
2	9233.000	37.58	10.48	48.06	74.00	-25.94	peak
3	11070.000	34.29	15.01	49.30	74.00	-24.70	peak
4	12687.000	32.21	18.05	50.26	74.00	-23.74	peak
5	13622.000	28.97	20.95	49.92	74.00	-24.08	peak
6	17945.000	24.76	25.75	50.51	74.00	-23.49	peak

Test Mode:	802.11a 20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.3V

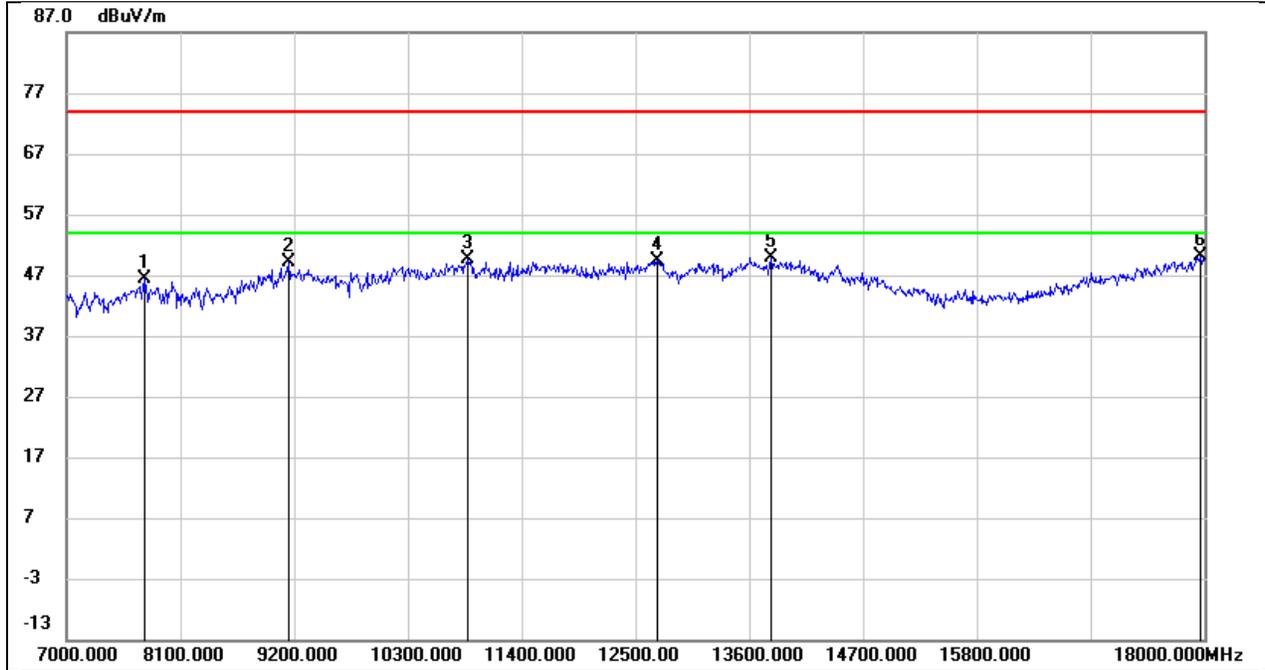


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7748.000	39.81	6.66	46.47	74.00	-27.53	peak
2	9145.000	38.59	10.43	49.02	74.00	-24.98	peak
3	10883.000	35.48	14.27	49.75	74.00	-24.25	peak
4	12709.000	31.33	18.09	49.42	74.00	-24.58	peak
5	13809.000	28.52	21.41	49.93	74.00	-24.07	peak
6	17967.000	24.15	25.89	50.04	74.00	-23.96	peak

Test Mode:	802.11a 20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.3V

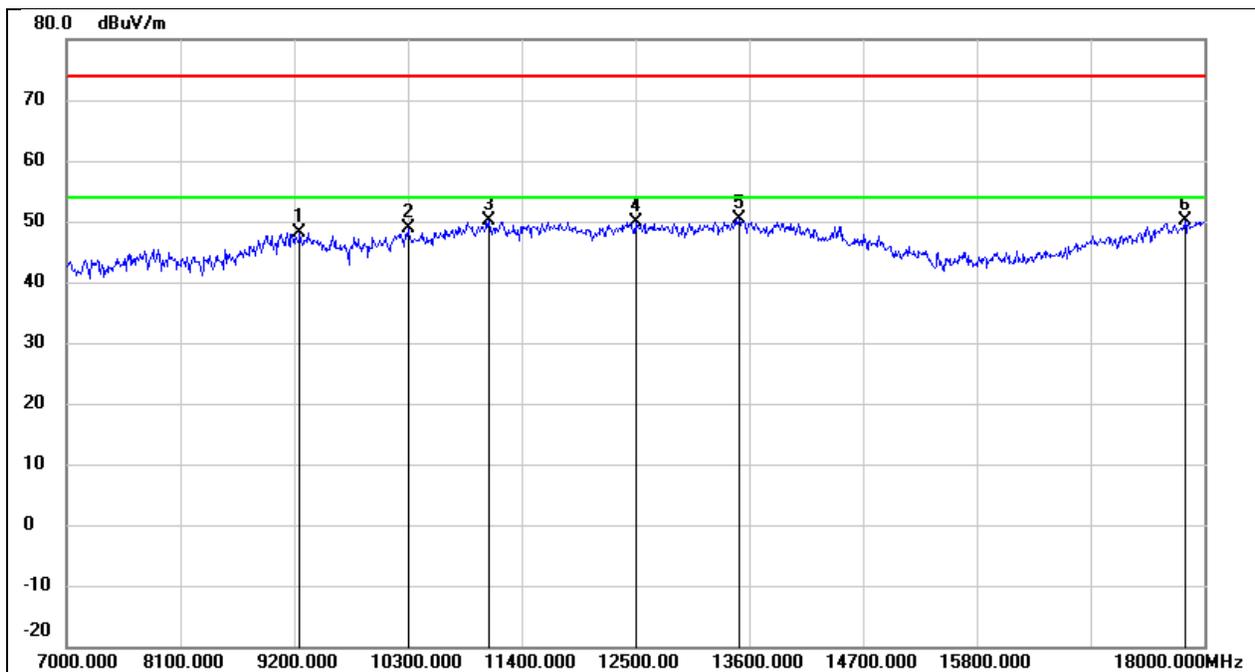


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.63	10.51	48.14	74.00	-25.86	peak
2	10300.000	36.46	12.40	48.86	74.00	-25.14	peak
3	11081.000	35.12	15.05	50.17	74.00	-23.83	peak
4	12500.000	32.12	17.83	49.95	74.00	-24.05	peak
5	13501.000	29.78	20.64	50.42	74.00	-23.58	peak
6	17813.000	25.20	24.84	50.04	74.00	-23.96	peak

Test Mode:	802.11a 20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

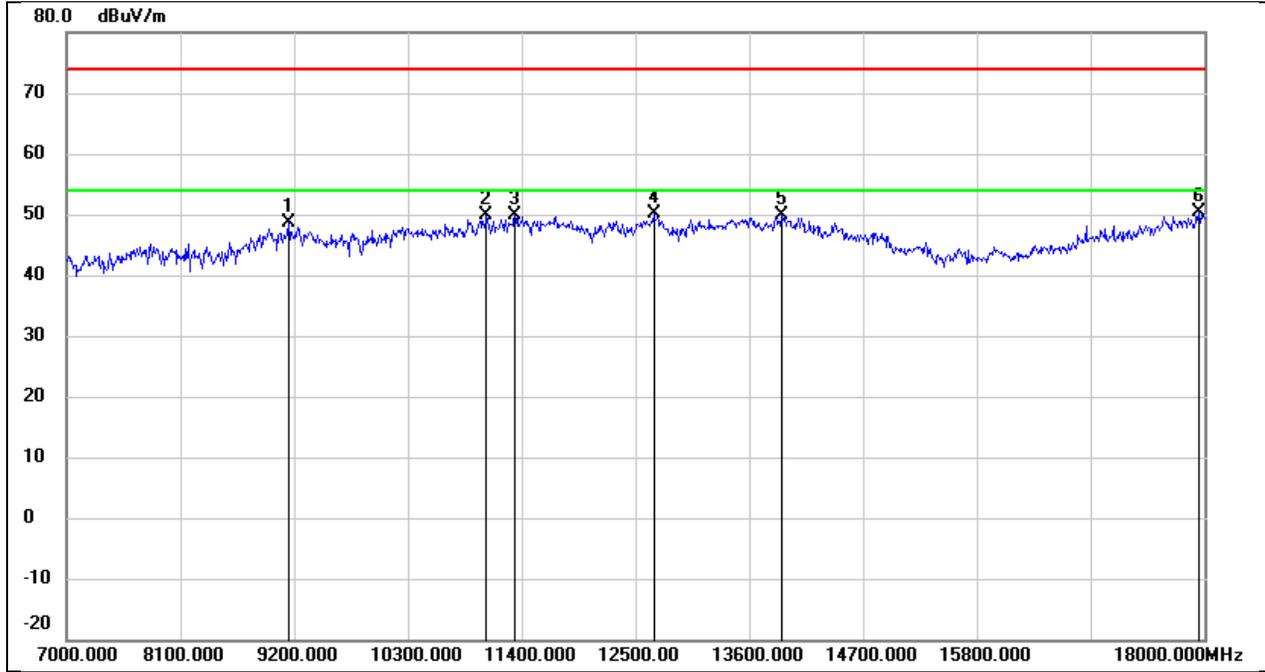


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	38.26	10.43	48.69	74.00	-25.31	peak
2	11059.000	34.93	14.96	49.89	74.00	-24.11	peak
3	11334.000	33.84	16.09	49.93	74.00	-24.07	peak
4	12676.000	32.07	18.05	50.12	74.00	-23.88	peak
5	13908.000	28.11	21.66	49.77	74.00	-24.23	peak
6	17945.000	24.59	25.75	50.34	74.00	-23.66	peak

Test Mode:	802.11a 20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.3V

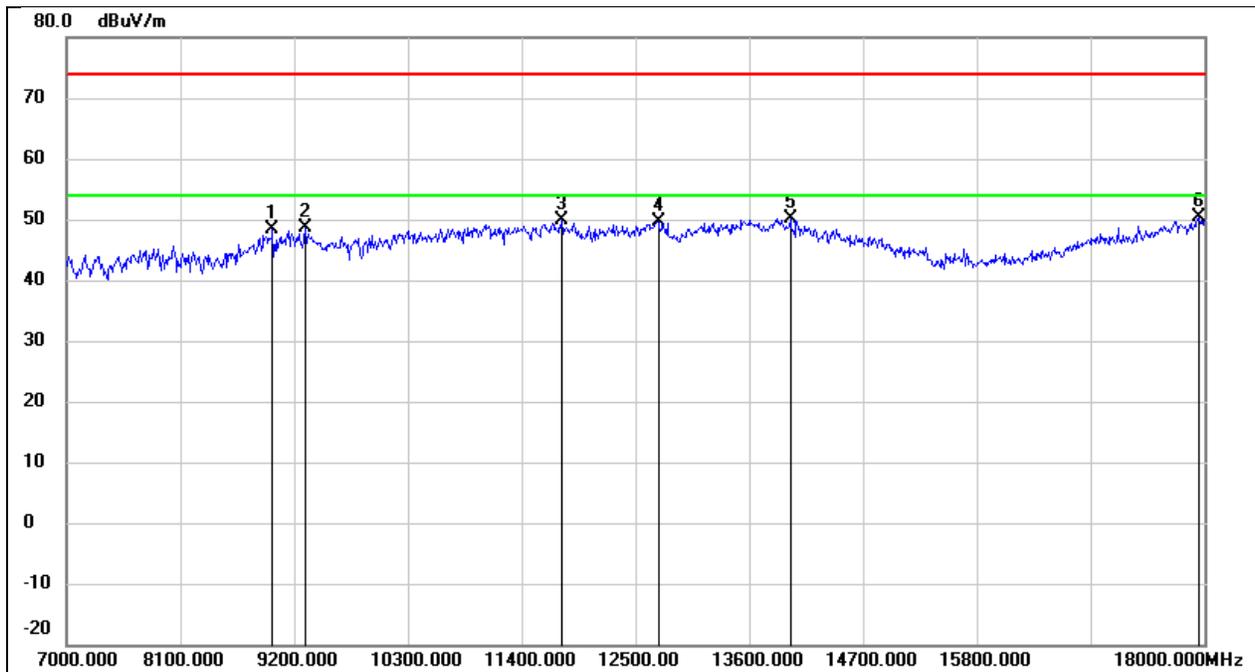


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	38.00	10.28	48.28	74.00	-25.72	peak
2	9310.000	38.03	10.54	48.57	74.00	-25.43	peak
3	11785.000	32.55	17.30	49.85	74.00	-24.15	peak
4	12720.000	31.52	18.09	49.61	74.00	-24.39	peak
5	13996.000	28.37	21.87	50.24	74.00	-23.76	peak
6	17945.000	24.57	25.75	50.32	74.00	-23.68	peak

Test Mode:	802.11a 20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

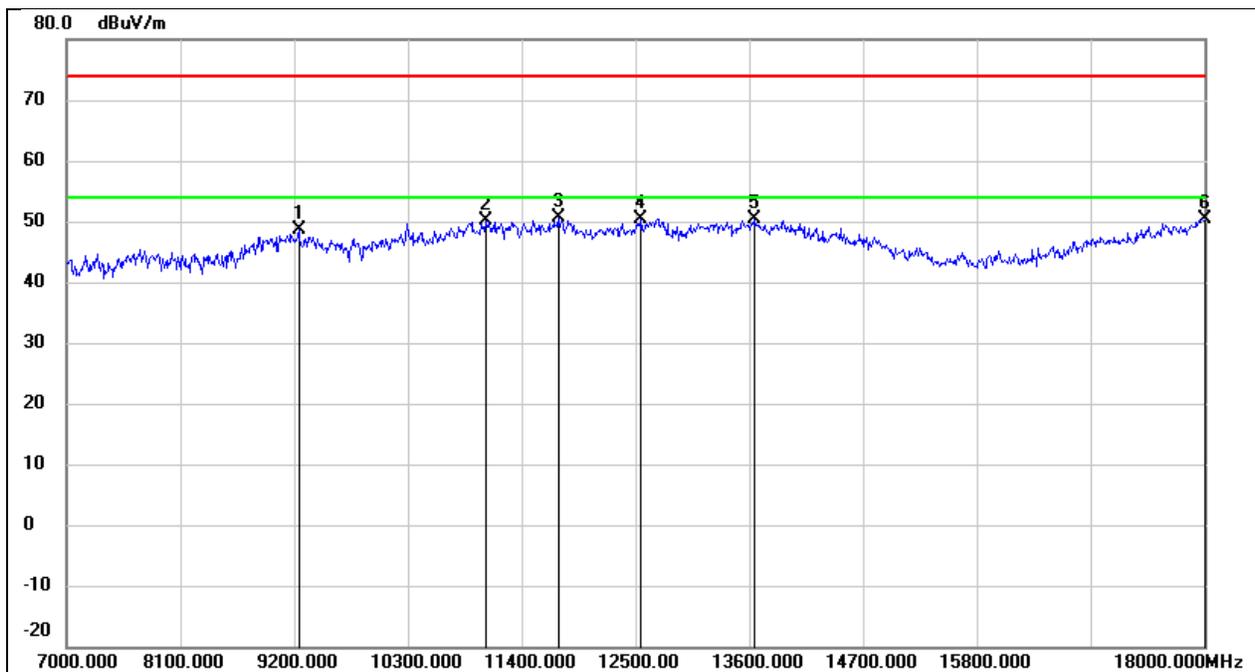


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	38.05	10.49	48.54	74.00	-25.46	peak
2	11059.000	35.26	14.96	50.22	74.00	-23.78	peak
3	11752.000	33.38	17.24	50.62	74.00	-23.38	peak
4	12555.000	32.45	17.90	50.35	74.00	-23.65	peak
5	13655.000	29.25	21.03	50.28	74.00	-23.72	peak
6	18000.000	24.38	26.12	50.50	74.00	-23.50	peak

Test Mode:	802.11a 20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.3V

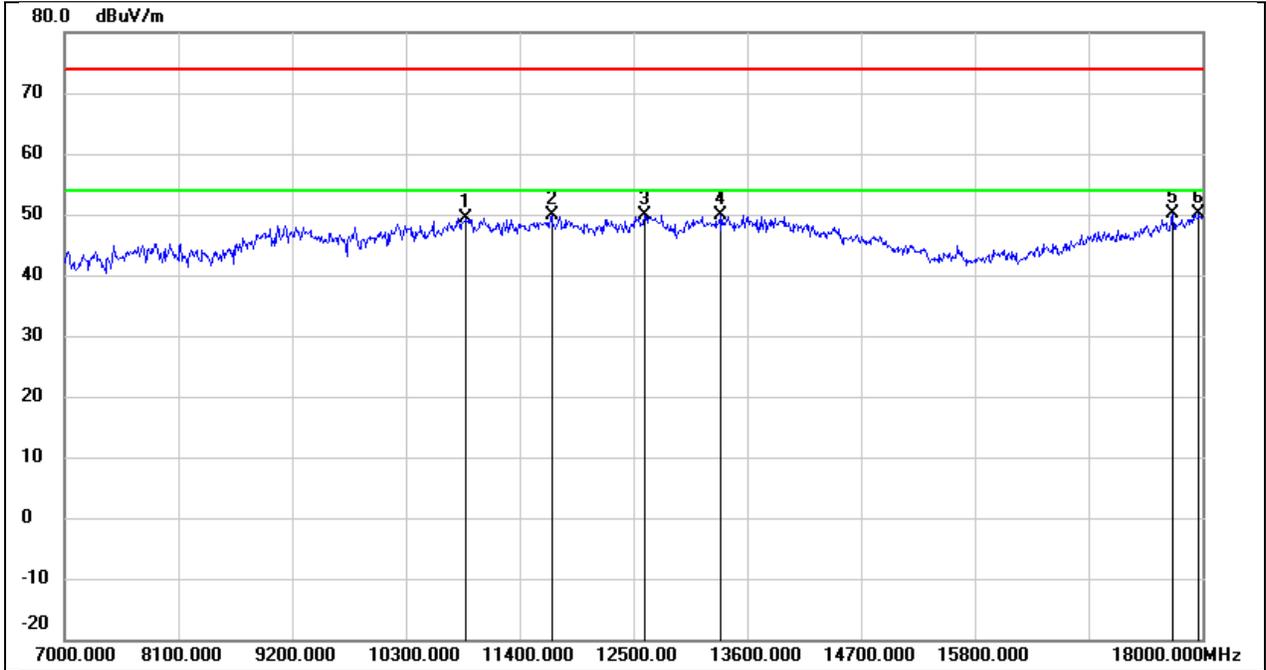


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10883.000	35.13	14.27	49.40	74.00	-24.60	peak
2	11708.000	32.61	17.16	49.77	74.00	-24.23	peak
3	12610.000	31.94	17.97	49.91	74.00	-24.09	peak
4	13336.000	29.99	19.93	49.92	74.00	-24.08	peak
5	17714.000	25.95	24.16	50.11	74.00	-23.89	peak
6	17967.000	24.22	25.89	50.11	74.00	-23.89	peak

Test Mode:	802.11a 20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.3V

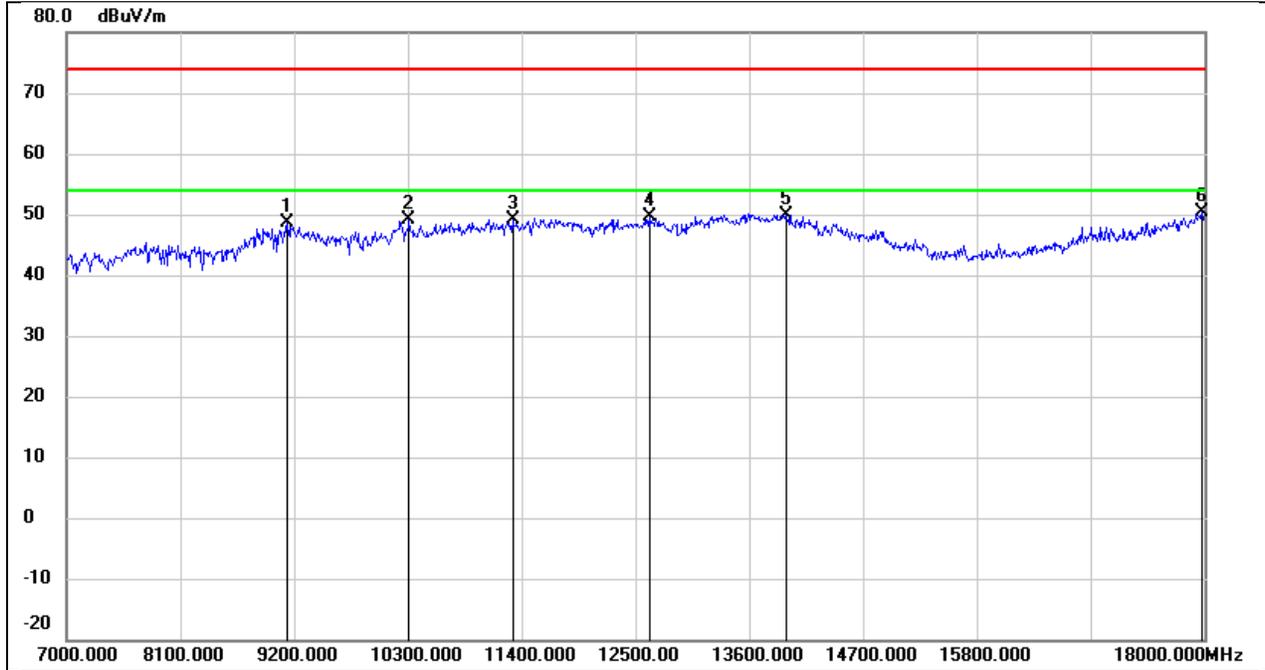


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	38.23	10.41	48.64	74.00	-25.36	peak
2	10311.000	36.64	12.42	49.06	74.00	-24.94	peak
3	11312.000	33.25	16.00	49.25	74.00	-24.75	peak
4	12632.000	31.66	17.99	49.65	74.00	-24.35	peak
5	13952.000	28.23	21.76	49.99	74.00	-24.01	peak
6	17978.000	24.39	25.97	50.36	74.00	-23.64	peak

Test Mode:	802.11a 20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.3V

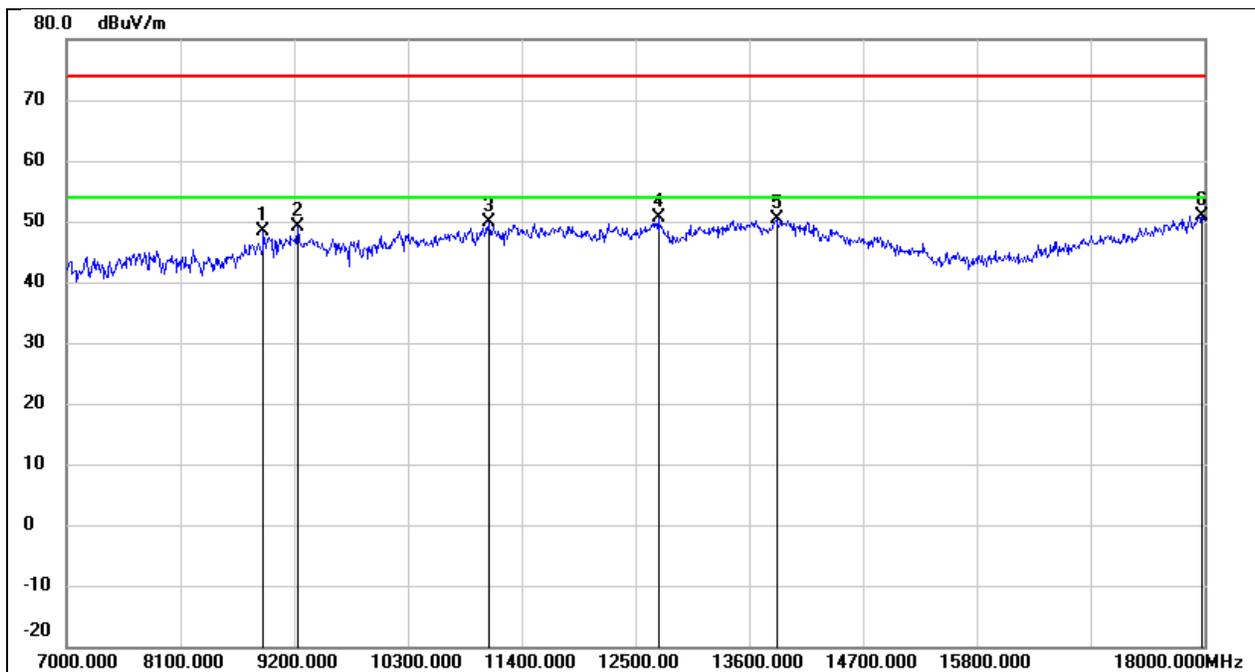


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8903.000	38.77	9.66	48.43	74.00	-25.57	peak
2	9233.000	38.60	10.48	49.08	74.00	-24.92	peak
3	11081.000	34.75	15.05	49.80	74.00	-24.20	peak
4	12720.000	32.51	18.09	50.60	74.00	-23.40	peak
5	13864.000	28.79	21.53	50.32	74.00	-23.68	peak
6	17978.000	24.85	25.97	50.82	74.00	-23.18	peak

Test Mode:	802.11a 20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3V

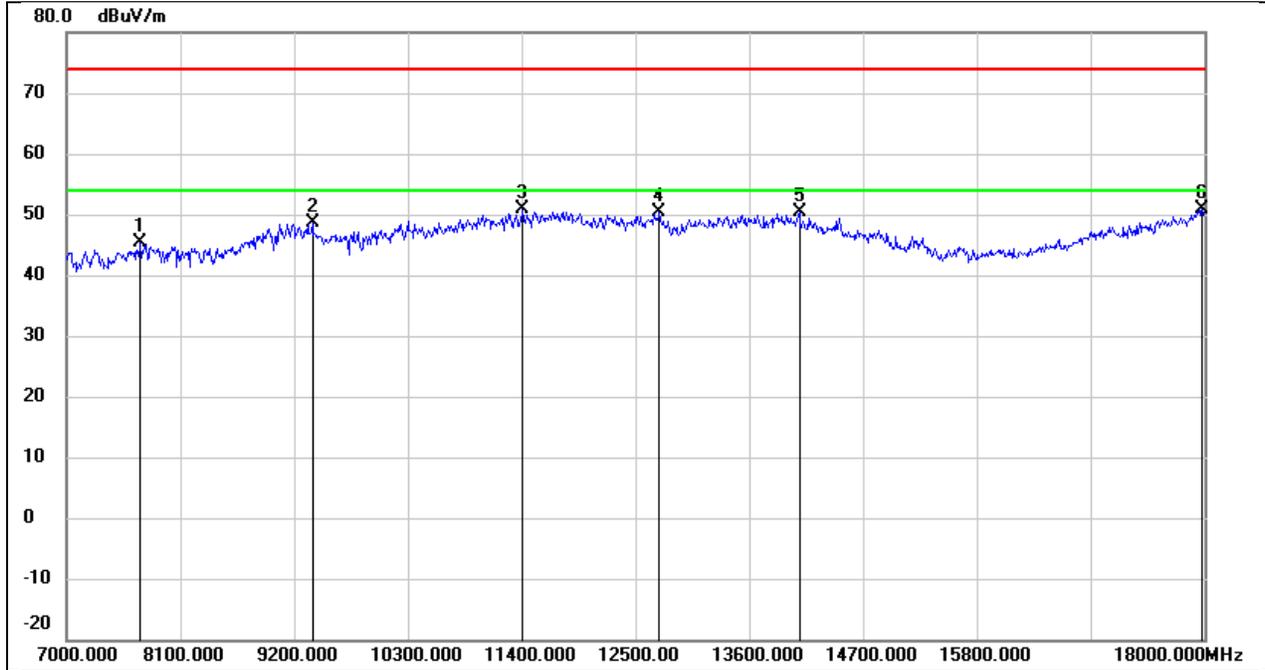


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7715.000	38.58	6.68	45.26	74.00	-28.74	peak
2	9376.000	37.93	10.58	48.51	74.00	-25.49	peak
3	11411.000	34.48	16.41	50.89	74.00	-23.11	peak
4	12731.000	32.15	18.12	50.27	74.00	-23.73	peak
5	14084.000	28.82	21.52	50.34	74.00	-23.66	peak
6	17978.000	24.88	25.97	50.85	74.00	-23.15	peak

Test Mode:	802.11a 20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.3V

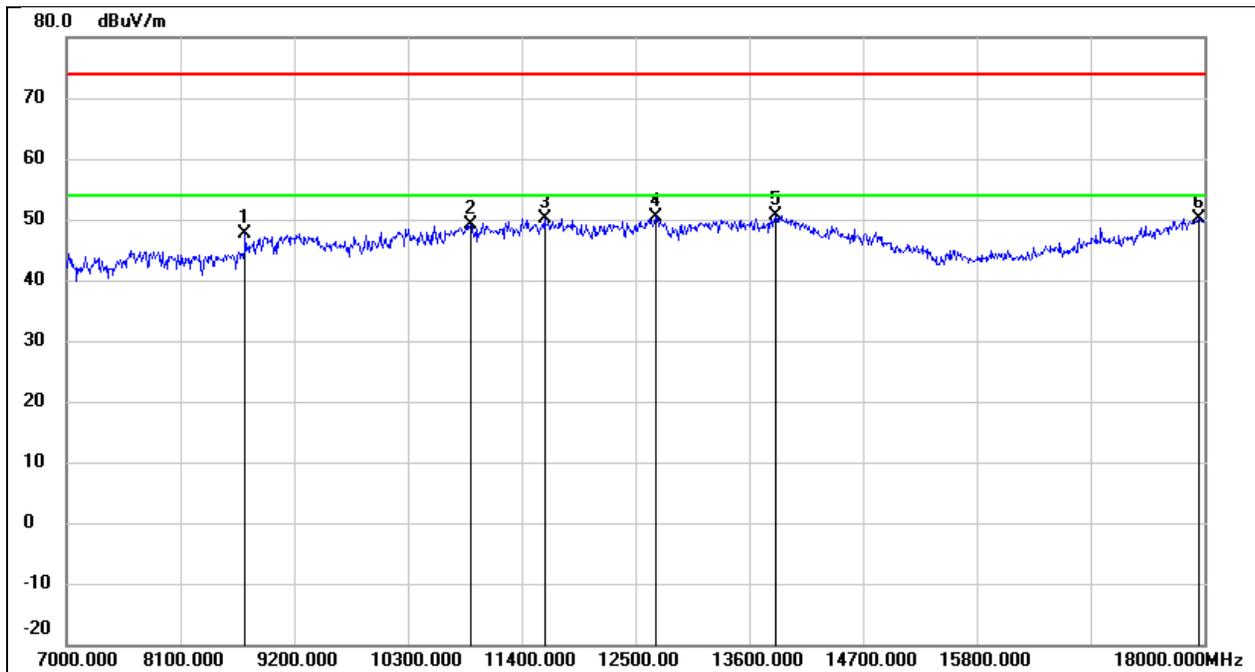


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8727.000	39.21	8.45	47.66	74.00	-26.34	peak
2	10905.000	34.68	14.36	49.04	74.00	-24.96	peak
3	11620.000	33.25	16.99	50.24	74.00	-23.76	peak
4	12698.000	32.25	18.08	50.33	74.00	-23.67	peak
5	13853.000	29.14	21.52	50.66	74.00	-23.34	peak
6	17945.000	24.35	25.75	50.10	74.00	-23.90	peak

Test Mode:	802.11a 20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3V

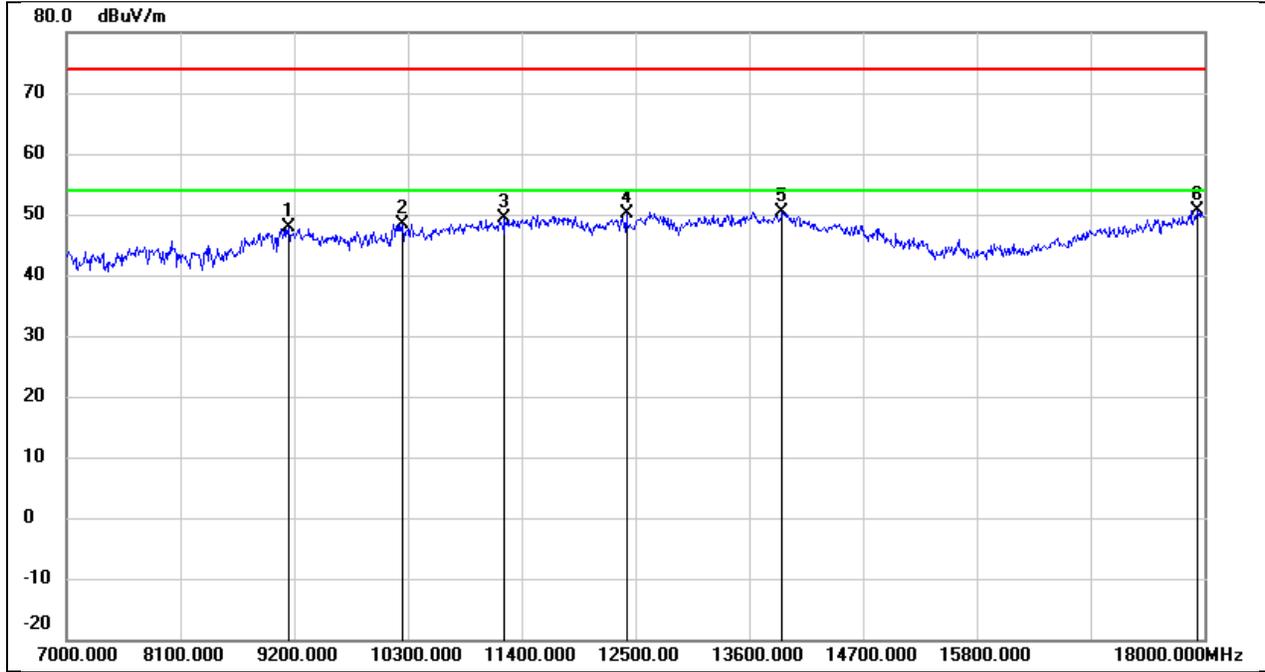


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	37.43	10.43	47.86	74.00	-26.14	peak
2	10245.000	36.18	12.28	48.46	74.00	-25.54	peak
3	11235.000	33.58	15.68	49.26	74.00	-24.74	peak
4	12412.000	32.25	17.81	50.06	74.00	-23.94	peak
5	13919.000	28.76	21.68	50.44	74.00	-23.56	peak
6	17934.000	25.03	25.67	50.70	74.00	-23.30	peak

Test Mode:	802.11a 20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3V

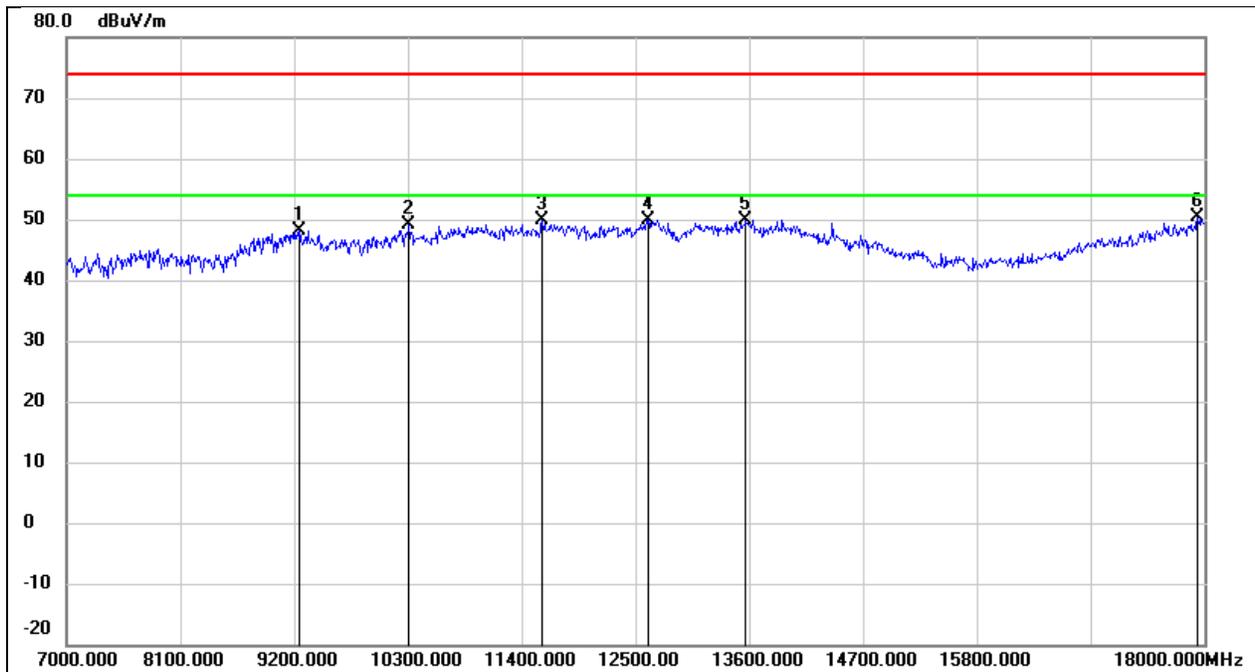


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.62	10.51	48.13	74.00	-25.87	peak
2	10311.000	36.73	12.42	49.15	74.00	-24.85	peak
3	11598.000	32.80	16.96	49.76	74.00	-24.24	peak
4	12621.000	31.90	17.98	49.88	74.00	-24.12	peak
5	13567.000	29.02	20.80	49.82	74.00	-24.18	peak
6	17934.000	24.59	25.67	50.26	74.00	-23.74	peak

Test Mode:	802.11a 20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

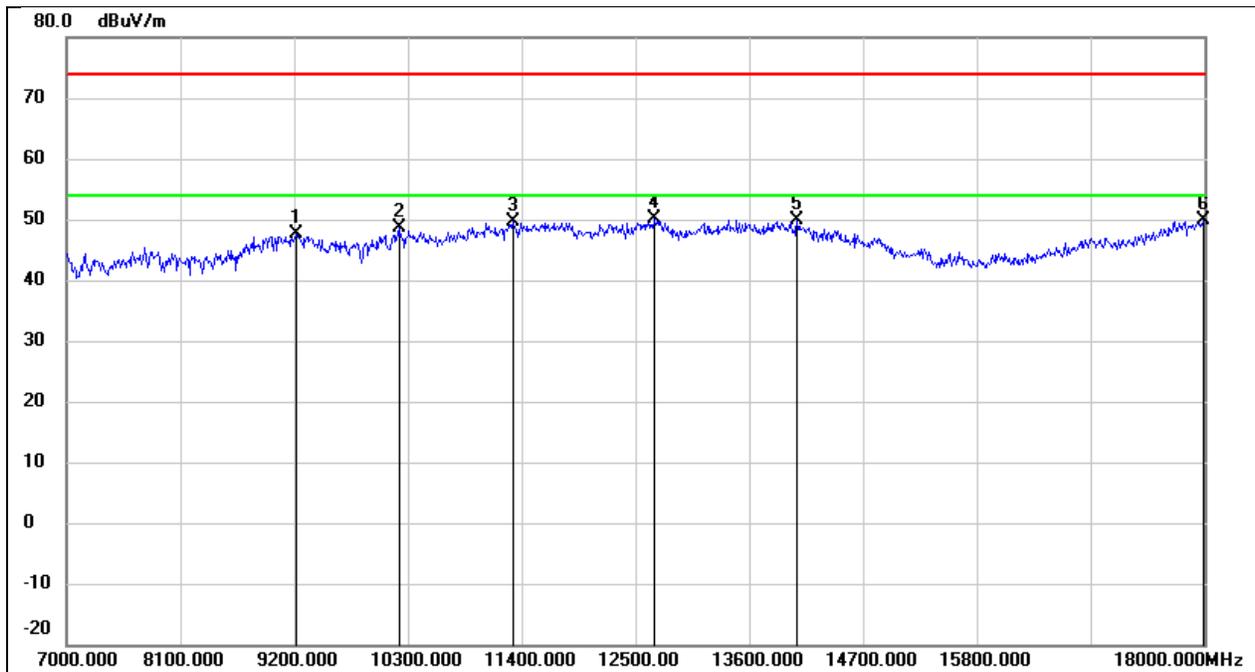


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	37.19	10.48	47.67	74.00	-26.33	peak
2	10212.000	36.53	12.21	48.74	74.00	-25.26	peak
3	11312.000	33.58	16.00	49.58	74.00	-24.42	peak
4	12687.000	32.06	18.05	50.11	74.00	-23.89	peak
5	14062.000	28.28	21.62	49.90	74.00	-24.10	peak
6	17989.000	23.89	26.04	49.93	74.00	-24.07	peak

Test Mode:	802.11a 20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3V

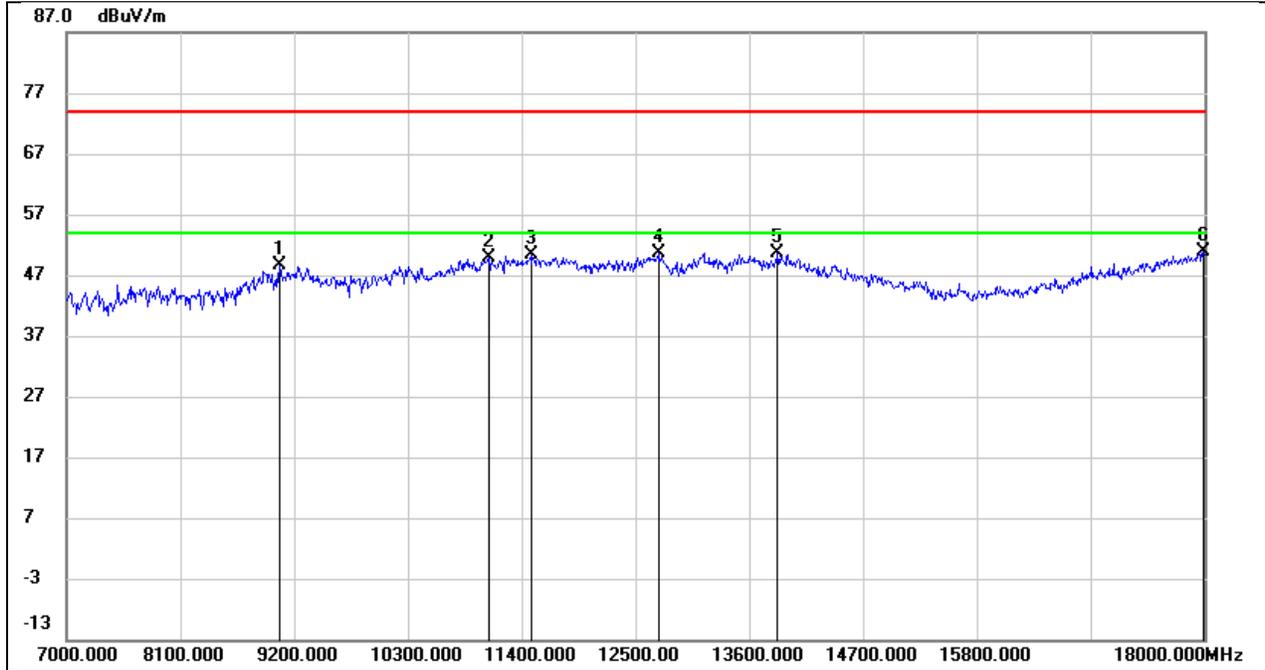


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	38.31	10.38	48.69	74.00	-25.31	peak
2	11081.000	34.94	15.05	49.99	74.00	-24.01	peak
3	11488.000	33.67	16.72	50.39	74.00	-23.61	peak
4	12720.000	32.57	18.09	50.66	74.00	-23.34	peak
5	13875.000	29.11	21.57	50.68	74.00	-23.32	peak
6	17989.000	24.85	26.04	50.89	74.00	-23.11	peak

Test Mode:	802.11a 20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3V

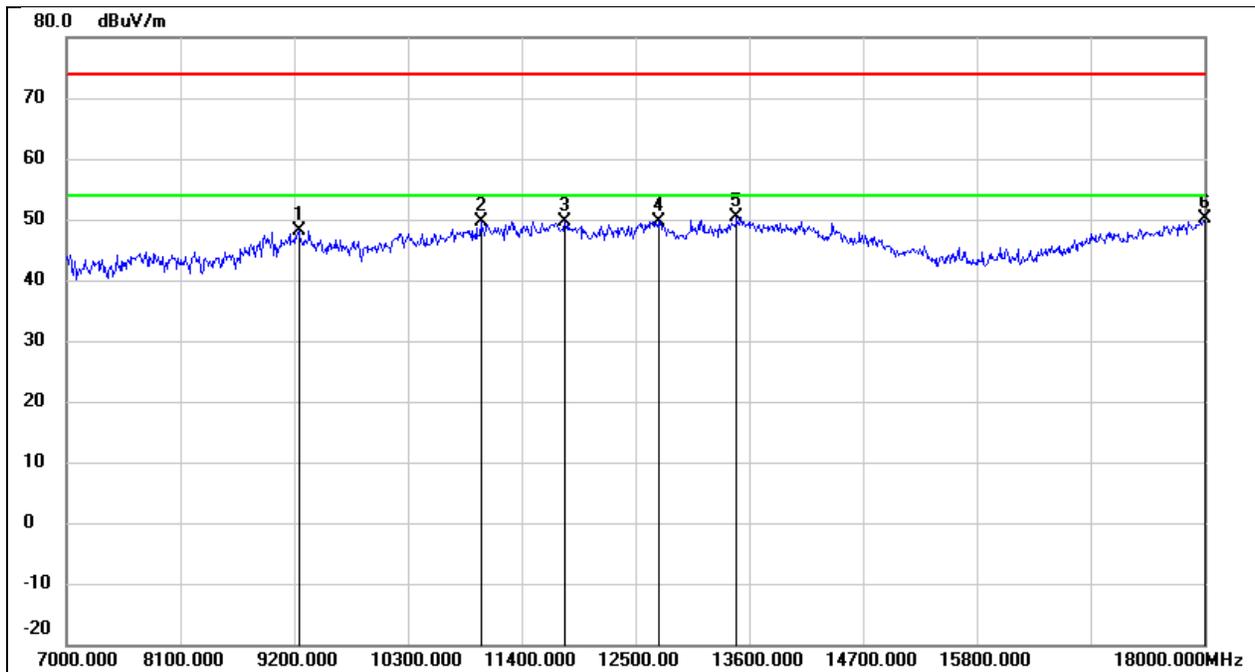


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.73	10.49	48.22	74.00	-25.78	peak
2	11004.000	34.97	14.74	49.71	74.00	-24.29	peak
3	11818.000	32.37	17.36	49.73	74.00	-24.27	peak
4	12720.000	31.60	18.09	49.69	74.00	-24.31	peak
5	13479.000	29.76	20.55	50.31	74.00	-23.69	peak
6	18000.000	24.09	26.12	50.21	74.00	-23.79	peak

Test Mode:	802.11a 20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3V

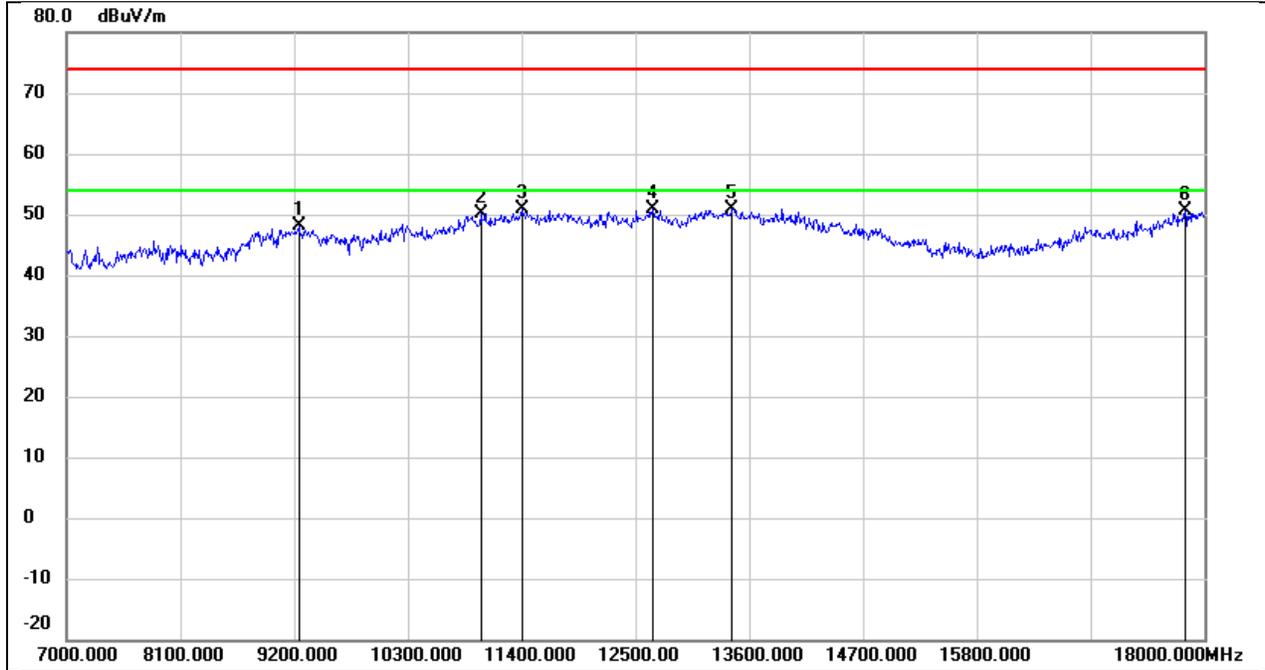


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.54	10.49	48.03	74.00	-25.97	peak
2	11004.000	35.46	14.74	50.20	74.00	-23.80	peak
3	11400.000	34.51	16.36	50.87	74.00	-23.13	peak
4	12665.000	32.72	18.04	50.76	74.00	-23.24	peak
5	13435.000	30.61	20.35	50.96	74.00	-23.04	peak
6	17813.000	25.77	24.84	50.61	74.00	-23.39	peak

Test Mode:	802.11a 20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

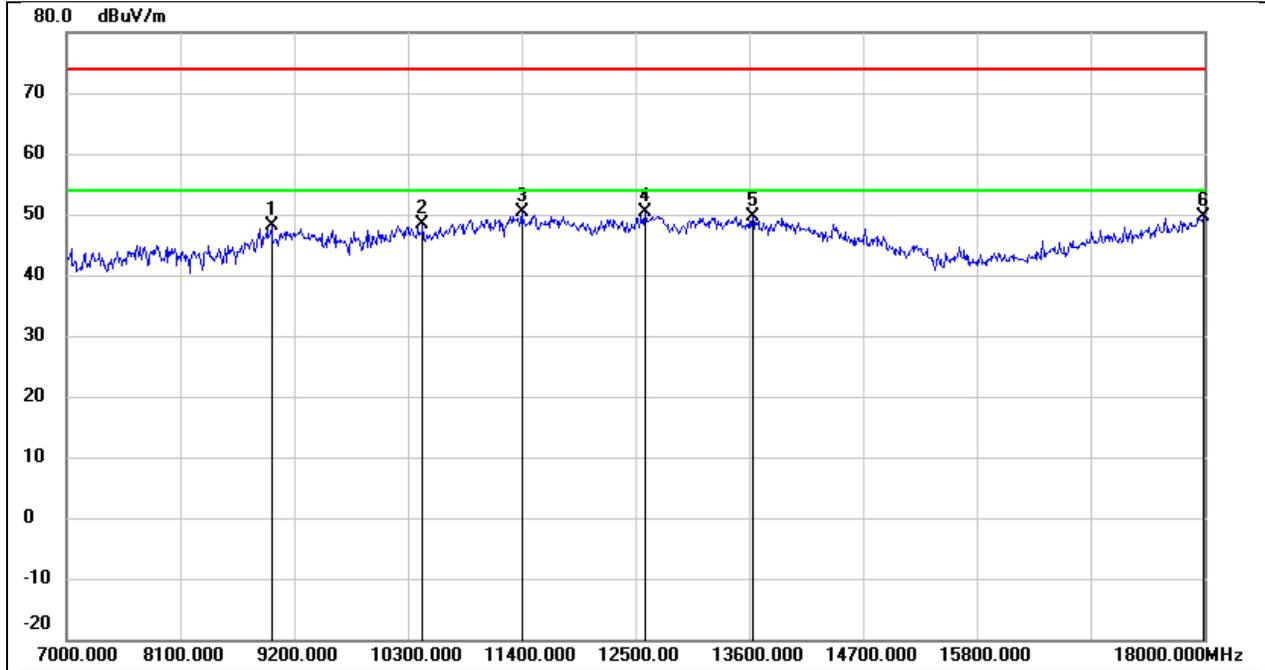


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.81	10.21	48.02	74.00	-25.98	peak
2	10443.000	35.59	12.70	48.29	74.00	-25.71	peak
3	11400.000	33.92	16.36	50.28	74.00	-23.72	peak
4	12588.000	32.32	17.94	50.26	74.00	-23.74	peak
5	13633.000	28.71	20.97	49.68	74.00	-24.32	peak
6	17989.000	23.66	26.04	49.70	74.00	-24.30	peak

Test Mode:	802.11a 20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3V

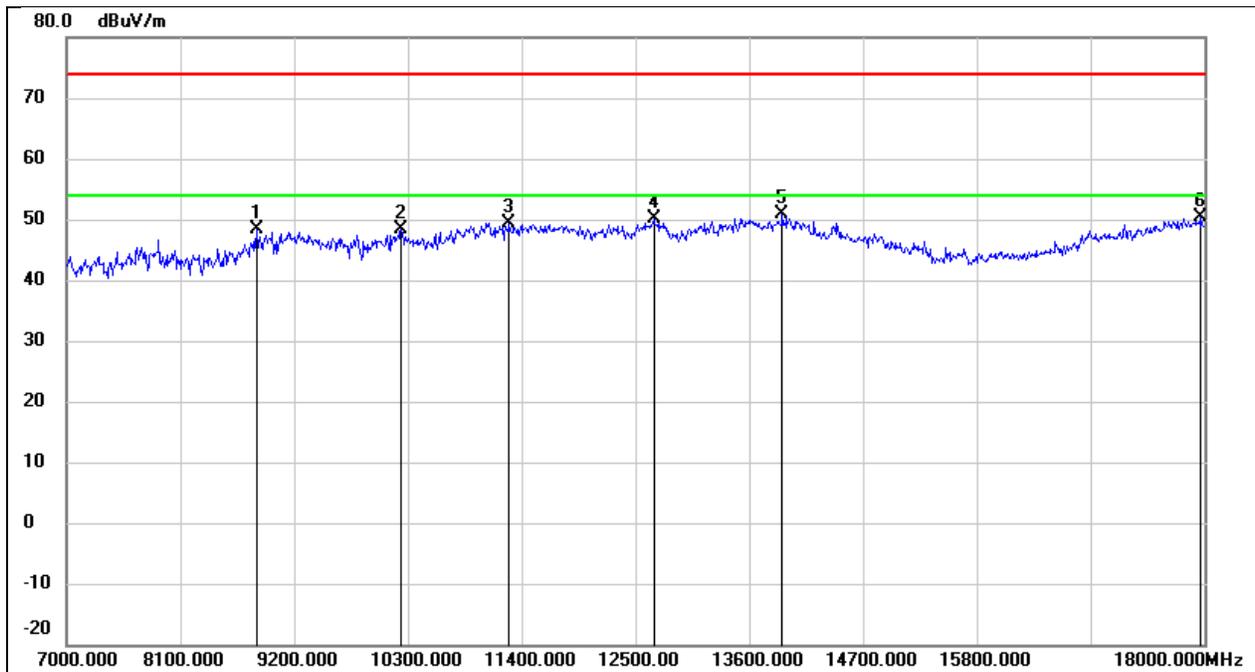


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8837.000	39.18	9.21	48.39	74.00	-25.61	peak
2	10234.000	36.21	12.26	48.47	74.00	-25.53	peak
3	11279.000	33.62	15.86	49.48	74.00	-24.52	peak
4	12676.000	32.02	18.05	50.07	74.00	-23.93	peak
5	13919.000	29.22	21.68	50.90	74.00	-23.10	peak
6	17967.000	24.57	25.89	50.46	74.00	-23.54	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

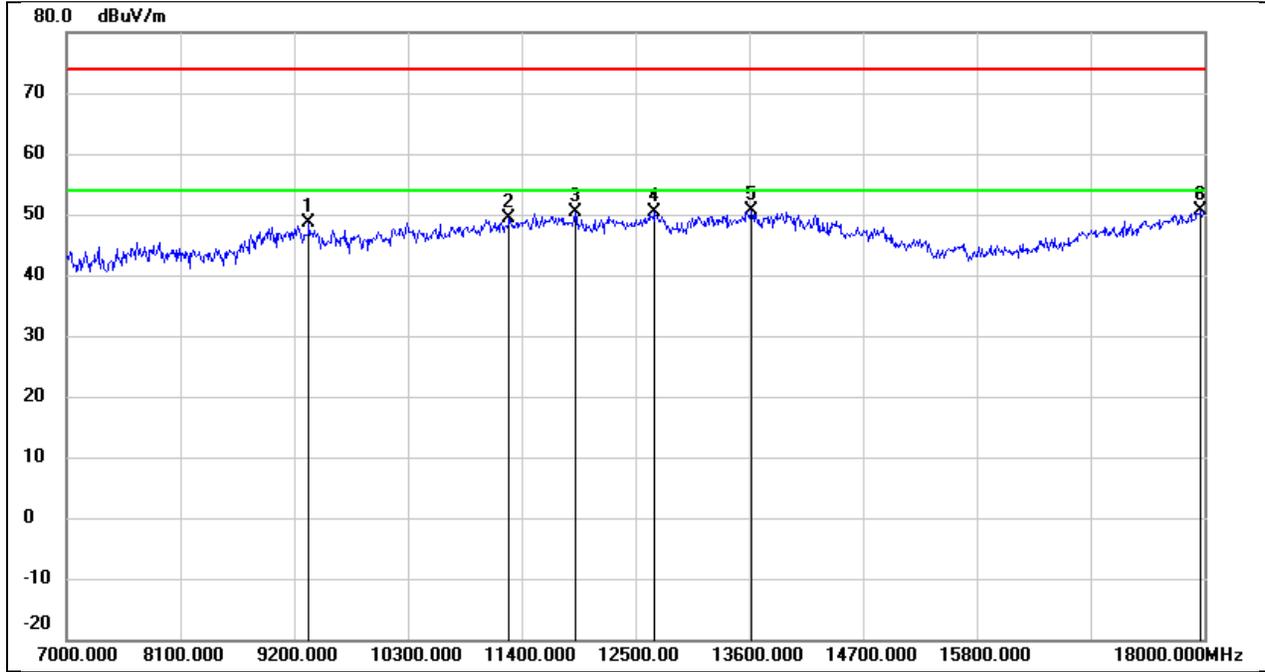


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	38.16	10.55	48.71	74.00	-25.29	peak
2	11279.000	33.48	15.86	49.34	74.00	-24.66	peak
3	11917.000	32.74	17.54	50.28	74.00	-23.72	peak
4	12687.000	32.29	18.05	50.34	74.00	-23.66	peak
5	13622.000	29.67	20.95	50.62	74.00	-23.38	peak
6	17967.000	24.82	25.89	50.71	74.00	-23.29	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

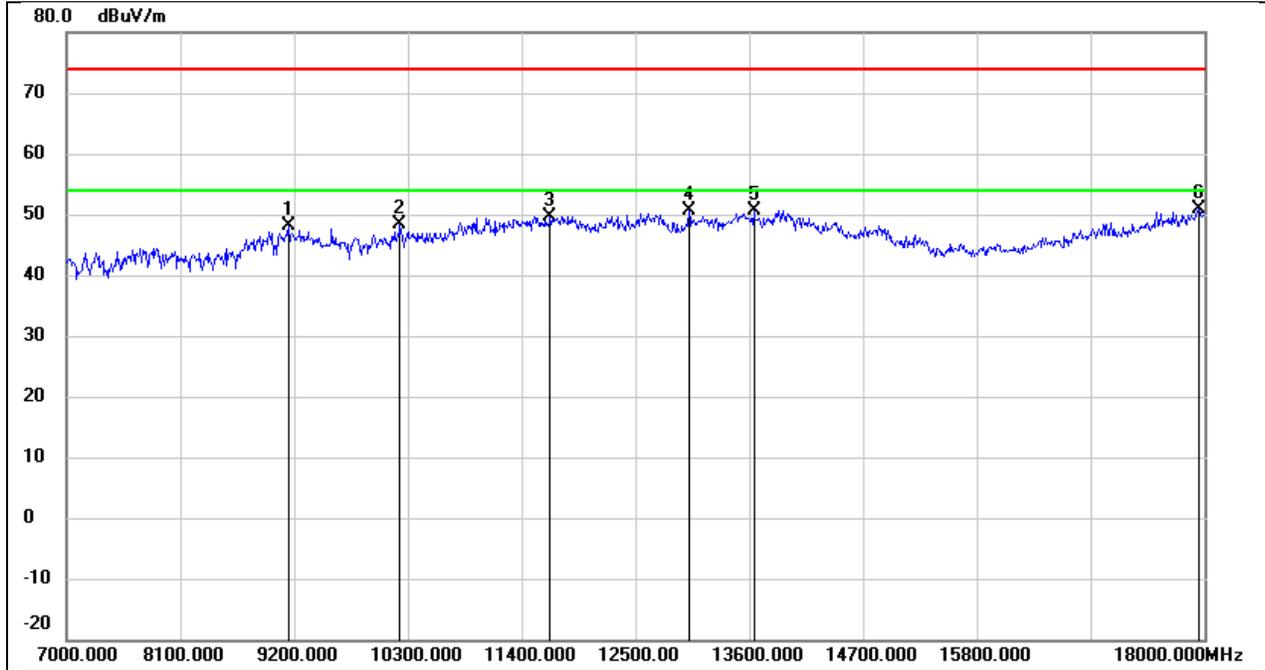


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	37.65	10.43	48.08	74.00	-25.92	peak
2	10223.000	36.19	12.24	48.43	74.00	-25.57	peak
3	11675.000	32.65	17.10	49.75	74.00	-24.25	peak
4	13017.000	32.20	18.53	50.73	74.00	-23.27	peak
5	13644.000	29.71	20.99	50.70	74.00	-23.30	peak
6	17945.000	25.10	25.75	50.85	74.00	-23.15	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 3.3V

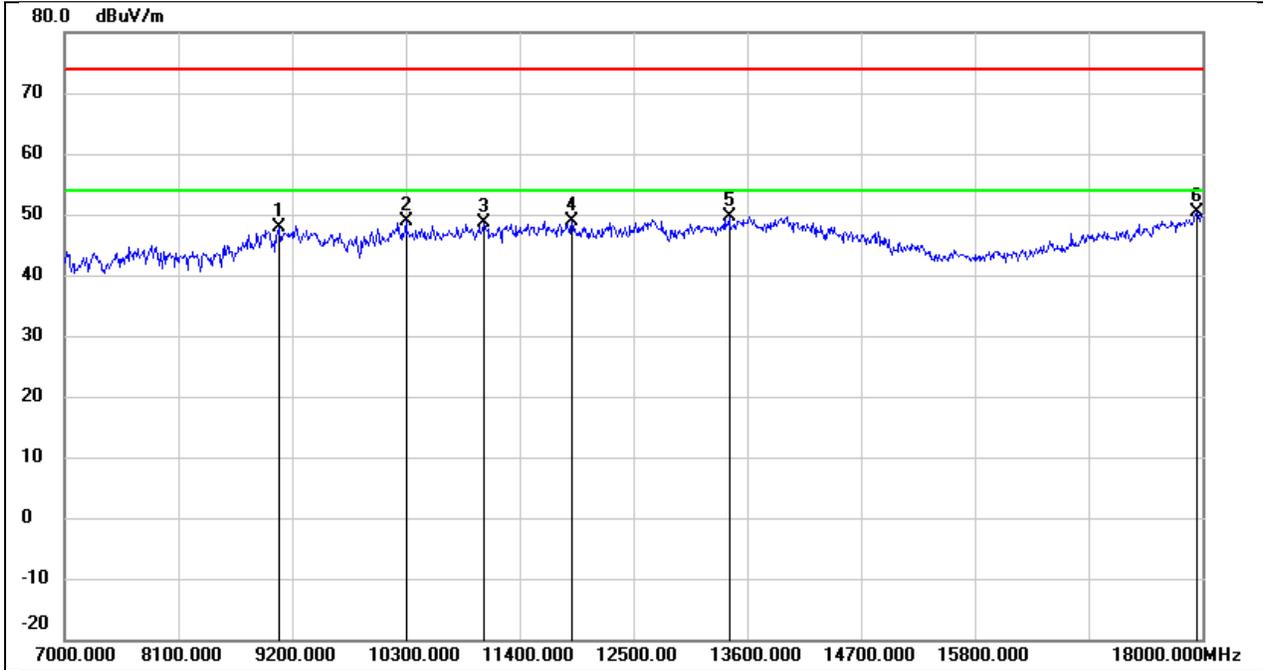


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9068.000	37.52	10.39	47.91	74.00	-26.09	peak
2	10300.000	36.52	12.40	48.92	74.00	-25.08	peak
3	11059.000	33.79	14.96	48.75	74.00	-25.25	peak
4	11906.000	31.48	17.52	49.00	74.00	-25.00	peak
5	13424.000	29.31	20.30	49.61	74.00	-24.39	peak
6	17945.000	24.70	25.75	50.45	74.00	-23.55	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 3.3V

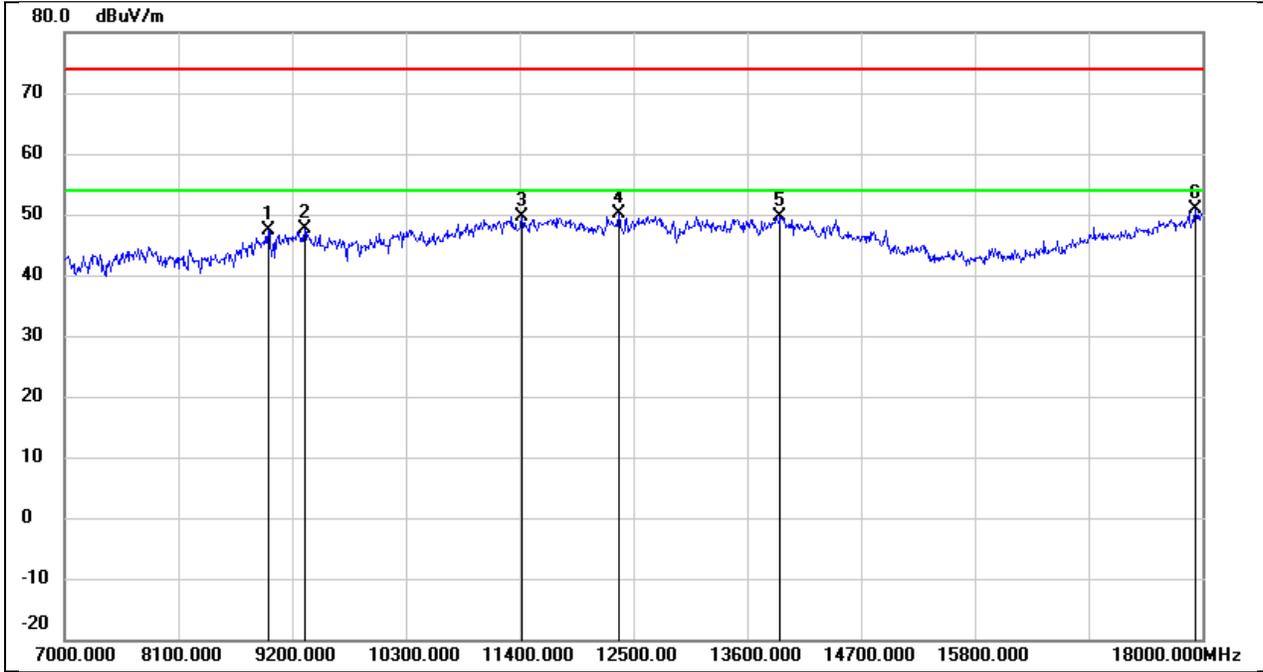


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8969.000	37.37	10.13	47.50	74.00	-26.50	peak
2	9321.000	37.01	10.53	47.54	74.00	-26.46	peak
3	11422.000	33.19	16.46	49.65	74.00	-24.35	peak
4	12357.000	32.24	17.79	50.03	74.00	-23.97	peak
5	13919.000	27.99	21.68	49.67	74.00	-24.33	peak
6	17934.000	25.31	25.67	50.98	74.00	-23.02	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

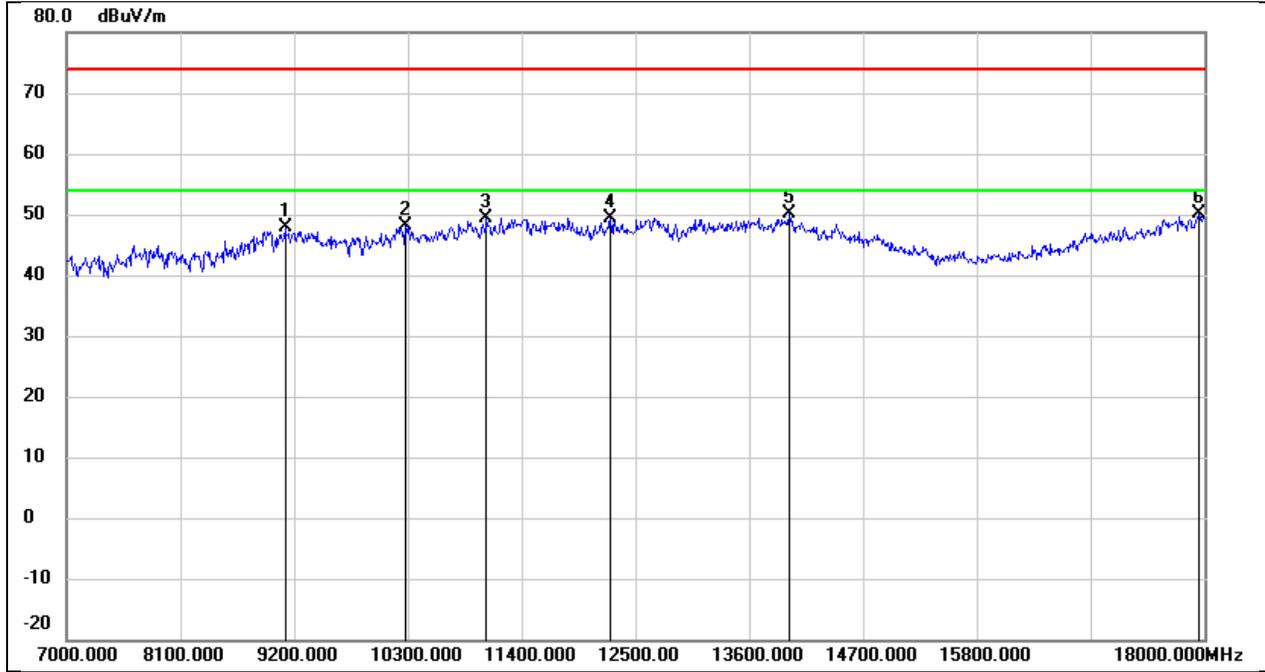


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9112.000	37.43	10.41	47.84	74.00	-26.16	peak
2	10278.000	35.77	12.35	48.12	74.00	-25.88	peak
3	11059.000	34.45	14.96	49.41	74.00	-24.59	peak
4	12258.000	31.57	17.77	49.34	74.00	-24.66	peak
5	13985.000	28.19	21.85	50.04	74.00	-23.96	peak
6	17945.000	24.40	25.75	50.15	74.00	-23.85	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 3.3V

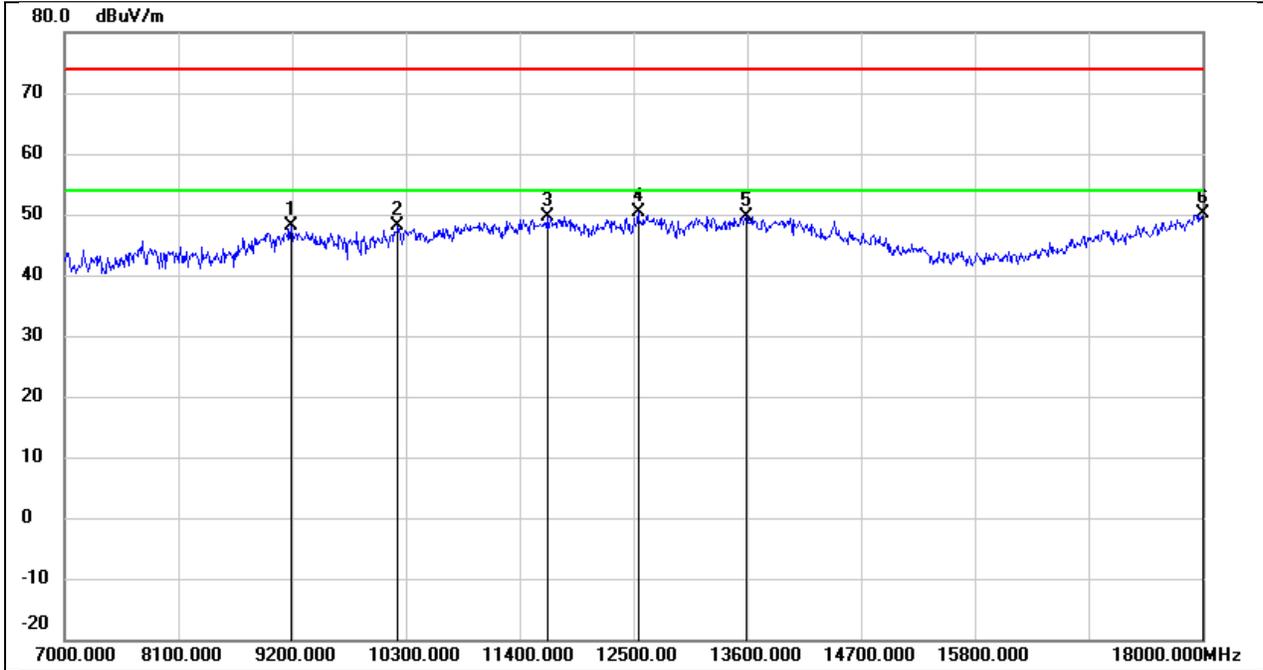


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.75	10.46	48.21	74.00	-25.79	peak
2	10223.000	35.92	12.24	48.16	74.00	-25.84	peak
3	11664.000	32.47	17.08	49.55	74.00	-24.45	peak
4	12544.000	32.46	17.88	50.34	74.00	-23.66	peak
5	13589.000	28.78	20.86	49.64	74.00	-24.36	peak
6	18000.000	24.01	26.12	50.13	74.00	-23.87	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

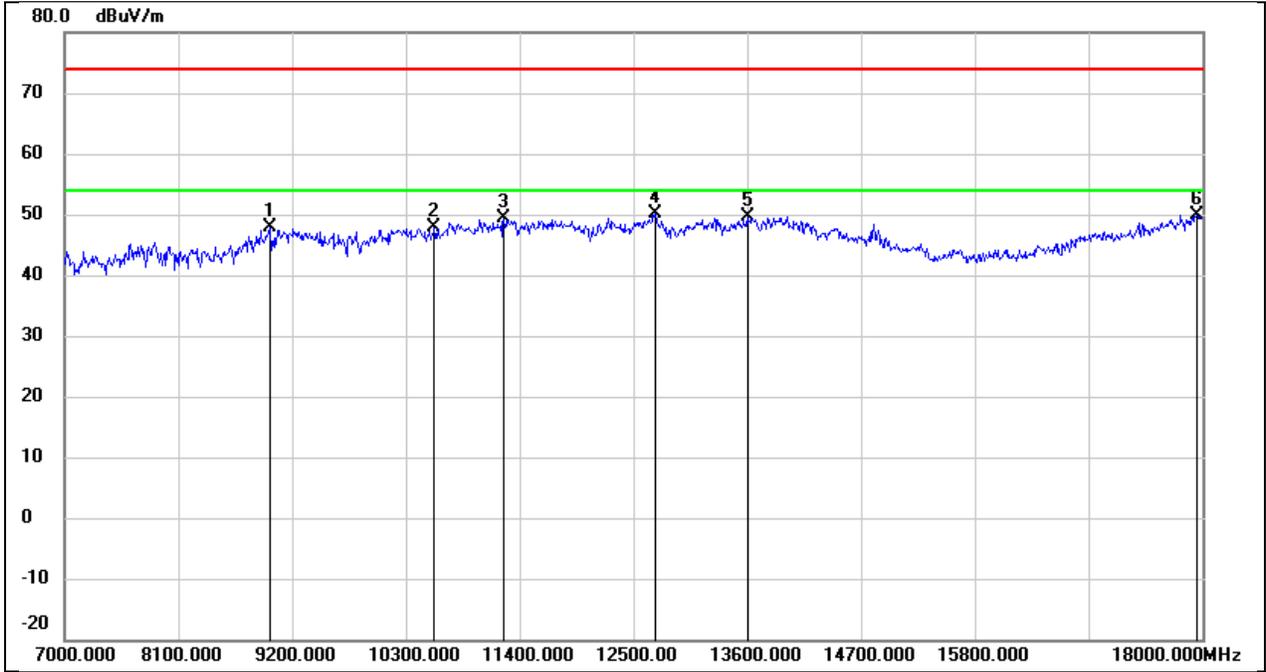


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.61	10.21	47.82	74.00	-26.18	peak
2	10575.000	34.80	13.10	47.90	74.00	-26.10	peak
3	11246.000	33.54	15.73	49.27	74.00	-24.73	peak
4	12709.000	32.03	18.09	50.12	74.00	-23.88	peak
5	13600.000	28.79	20.89	49.68	74.00	-24.32	peak
6	17945.000	24.17	25.75	49.92	74.00	-24.08	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.3V

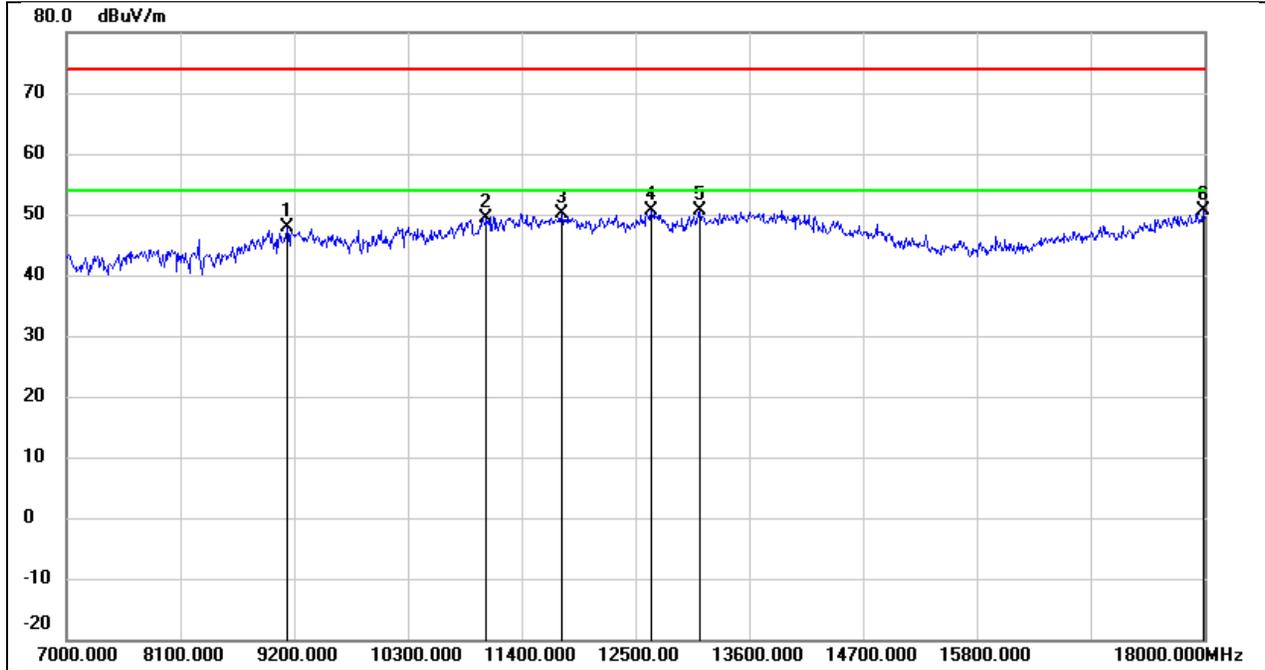


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.35	10.41	47.76	74.00	-26.24	peak
2	11059.000	34.45	14.96	49.41	74.00	-24.59	peak
3	11785.000	32.90	17.30	50.20	74.00	-23.80	peak
4	12654.000	32.70	18.01	50.71	74.00	-23.29	peak
5	13127.000	31.54	19.01	50.55	74.00	-23.45	peak
6	17989.000	24.51	26.04	50.55	74.00	-23.45	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.3V

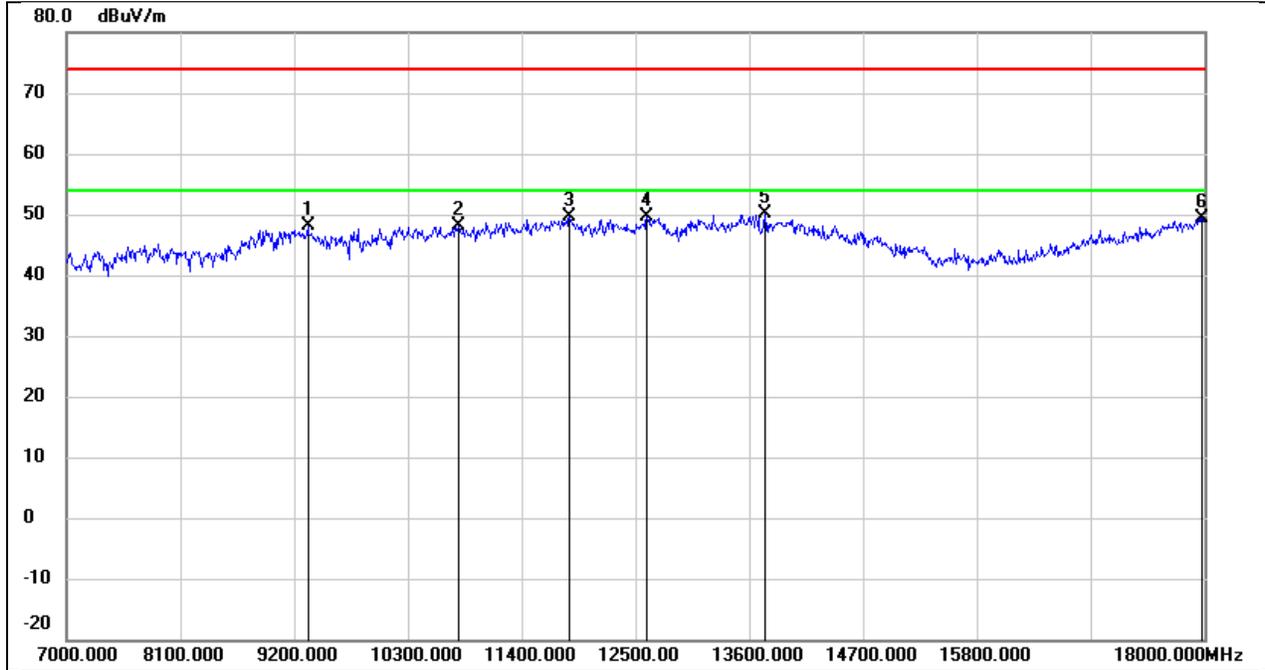


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.62	10.54	48.16	74.00	-25.84	peak
2	10795.000	34.17	13.94	48.11	74.00	-25.89	peak
3	11862.000	32.25	17.45	49.70	74.00	-24.30	peak
4	12610.000	31.64	17.97	49.61	74.00	-24.39	peak
5	13754.000	28.89	21.27	50.16	74.00	-23.84	peak
6	17978.000	23.45	25.97	49.42	74.00	-24.58	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.3V

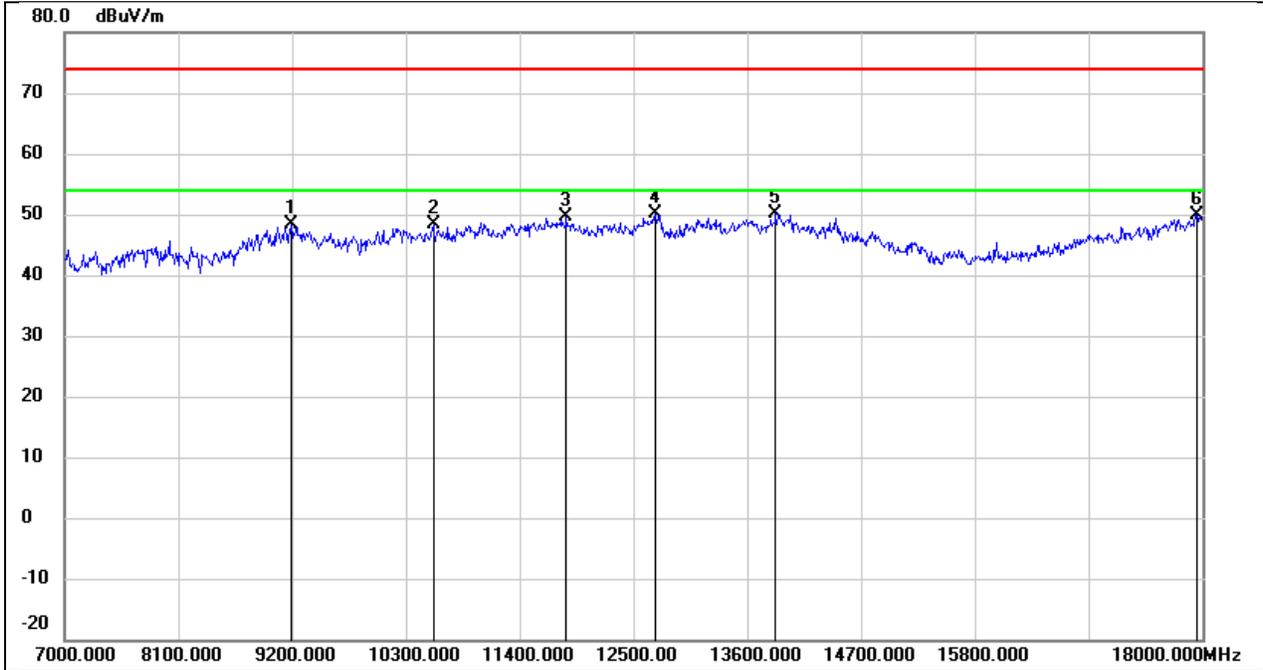


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.96	10.46	48.42	74.00	-25.58	peak
2	10564.000	35.39	13.06	48.45	74.00	-25.55	peak
3	11851.000	32.09	17.43	49.52	74.00	-24.48	peak
4	12709.000	31.99	18.09	50.08	74.00	-23.92	peak
5	13875.000	28.56	21.57	50.13	74.00	-23.87	peak
6	17945.000	24.05	25.75	49.80	74.00	-24.20	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

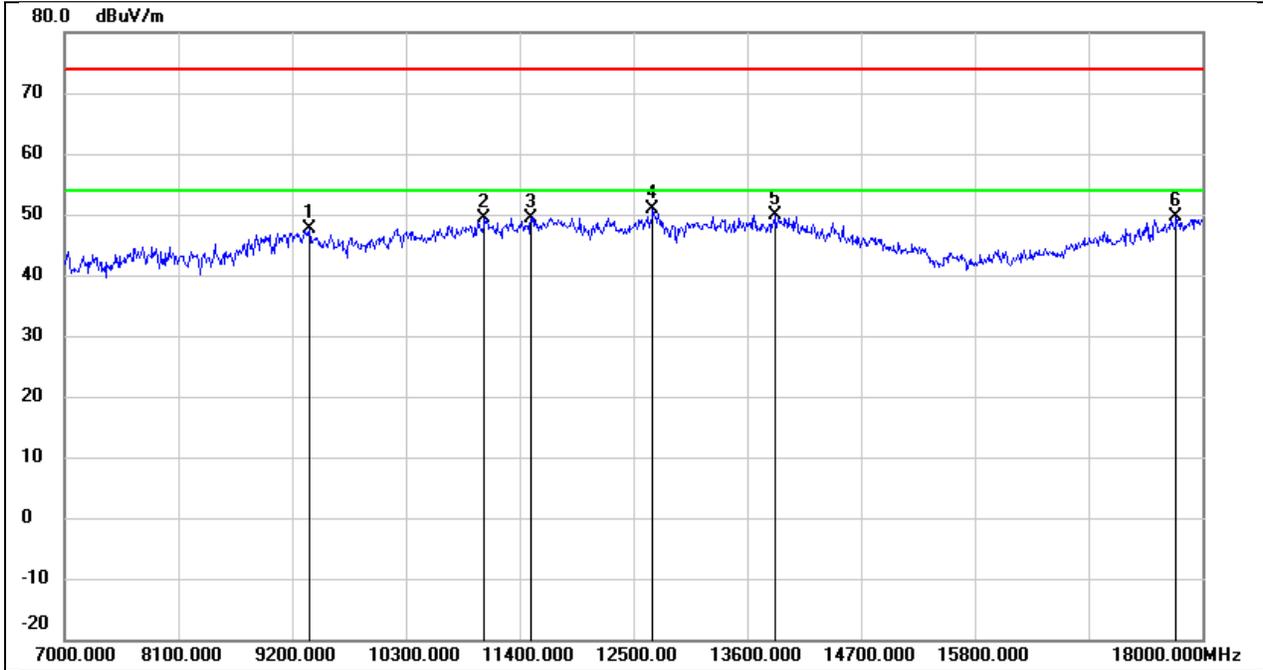


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9365.000	37.12	10.57	47.69	74.00	-26.31	peak
2	11059.000	34.42	14.96	49.38	74.00	-24.62	peak
3	11510.000	32.71	16.79	49.50	74.00	-24.50	peak
4	12687.000	32.75	18.05	50.80	74.00	-23.20	peak
5	13864.000	28.38	21.53	49.91	74.00	-24.09	peak
6	17747.000	25.13	24.39	49.52	74.00	-24.48	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.3V

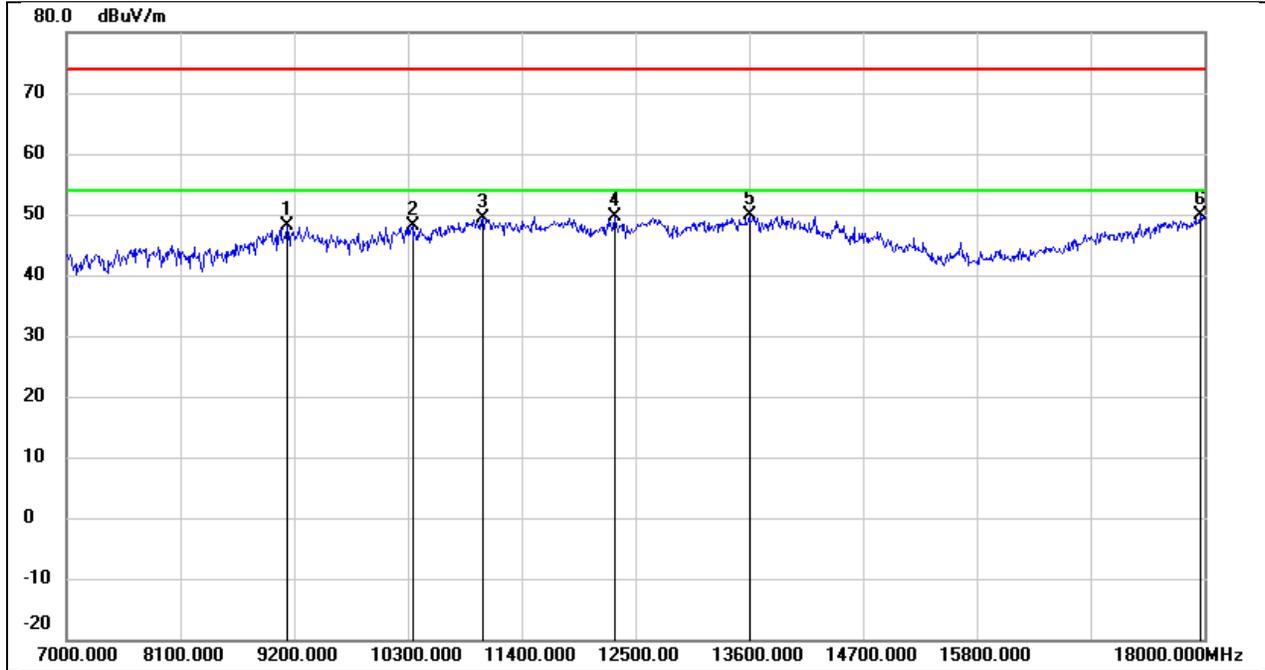


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.77	10.41	48.18	74.00	-25.82	peak
2	10344.000	35.73	12.49	48.22	74.00	-25.78	peak
3	11026.000	34.50	14.82	49.32	74.00	-24.68	peak
4	12302.000	31.85	17.78	49.63	74.00	-24.37	peak
5	13600.000	28.96	20.89	49.85	74.00	-24.15	peak
6	17967.000	23.93	25.89	49.82	74.00	-24.18	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

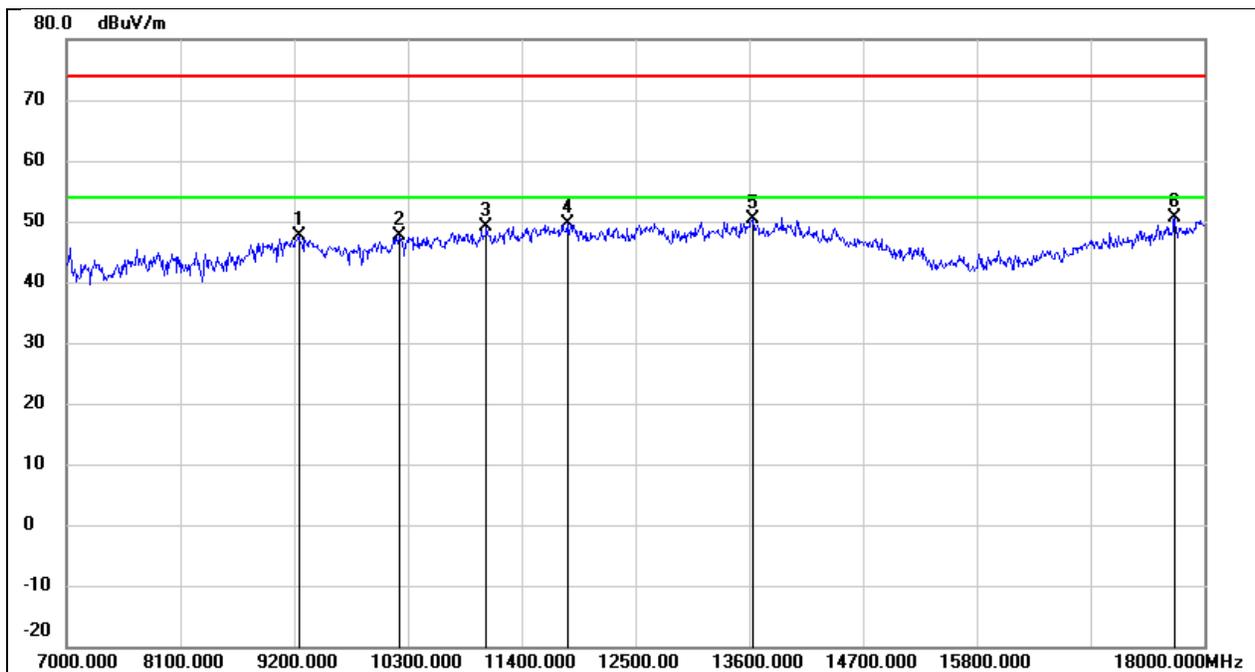


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.04	10.49	47.53	74.00	-26.47	peak
2	10212.000	35.53	12.21	47.74	74.00	-26.26	peak
3	11059.000	34.20	14.96	49.16	74.00	-24.84	peak
4	11840.000	32.16	17.40	49.56	74.00	-24.44	peak
5	13633.000	29.52	20.97	50.49	74.00	-23.51	peak
6	17714.000	26.44	24.16	50.60	74.00	-23.40	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.3V

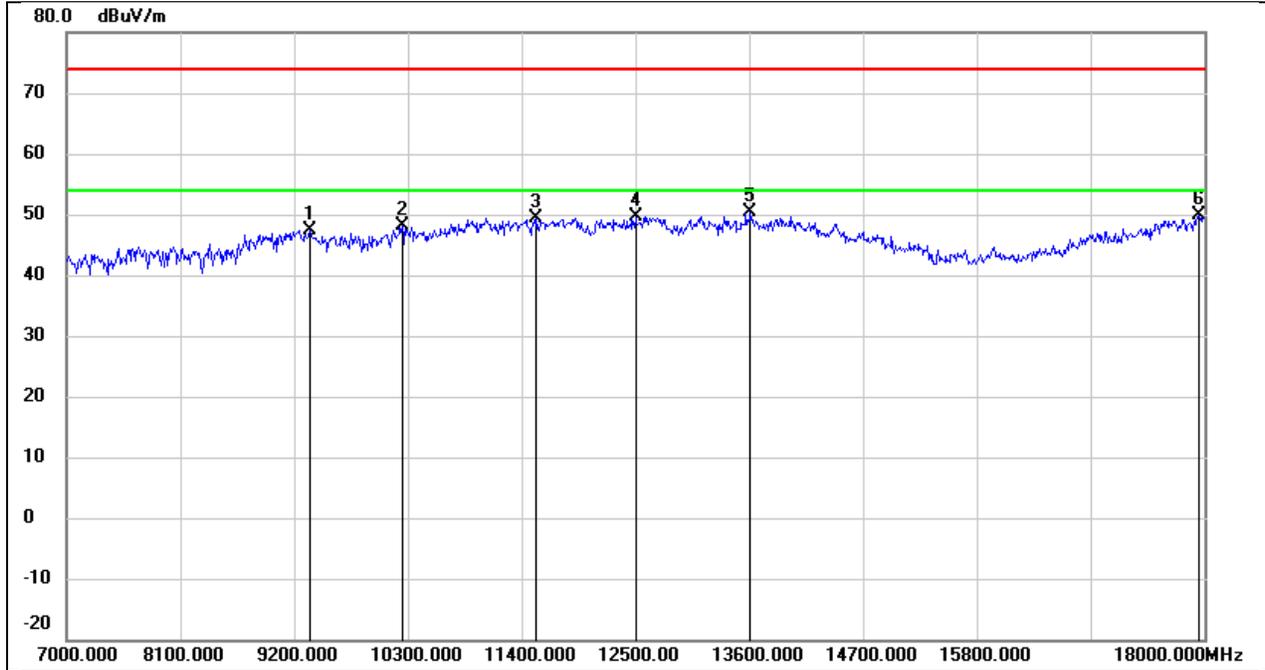


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	36.87	10.56	47.43	74.00	-26.57	peak
2	10245.000	35.83	12.28	48.11	74.00	-25.89	peak
3	11543.000	32.60	16.84	49.44	74.00	-24.56	peak
4	12500.000	31.80	17.83	49.63	74.00	-24.37	peak
5	13611.000	29.42	20.92	50.34	74.00	-23.66	peak
6	17945.000	24.12	25.75	49.87	74.00	-24.13	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.3V

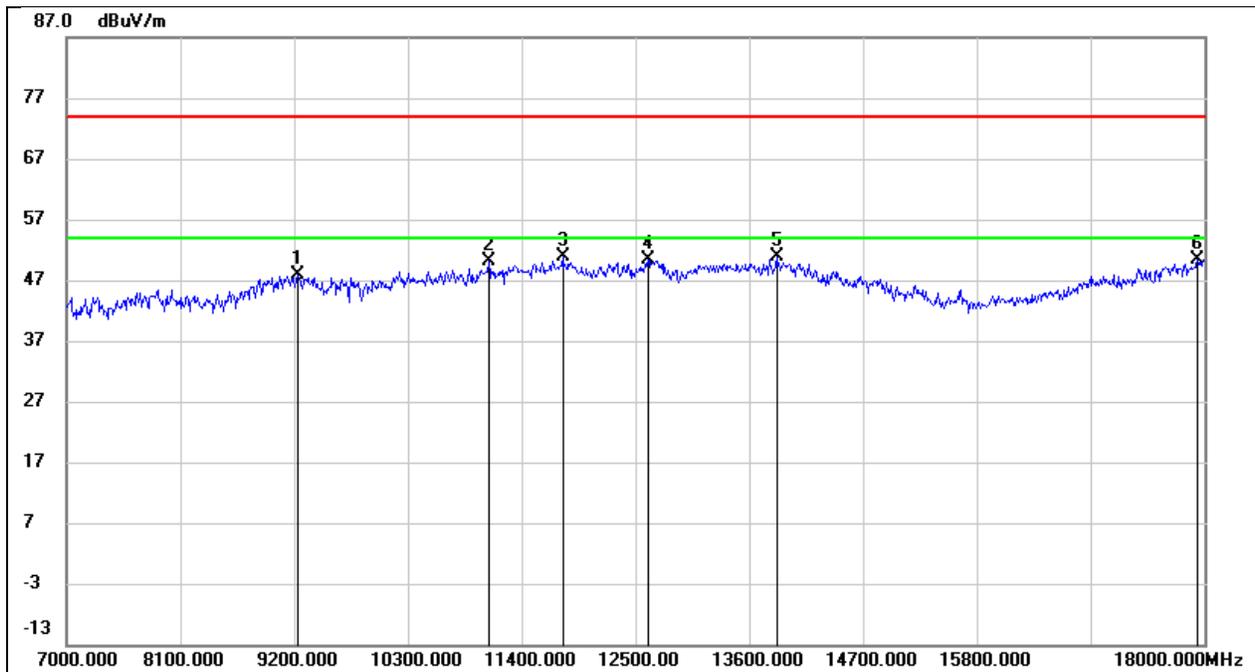


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.33	10.48	47.81	74.00	-26.19	peak
2	11081.000	34.96	15.05	50.01	74.00	-23.99	peak
3	11796.000	33.66	17.32	50.98	74.00	-23.02	peak
4	12621.000	32.32	17.98	50.30	74.00	-23.70	peak
5	13864.000	29.27	21.53	50.80	74.00	-23.20	peak
6	17934.000	24.75	25.67	50.42	74.00	-23.58	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.3V

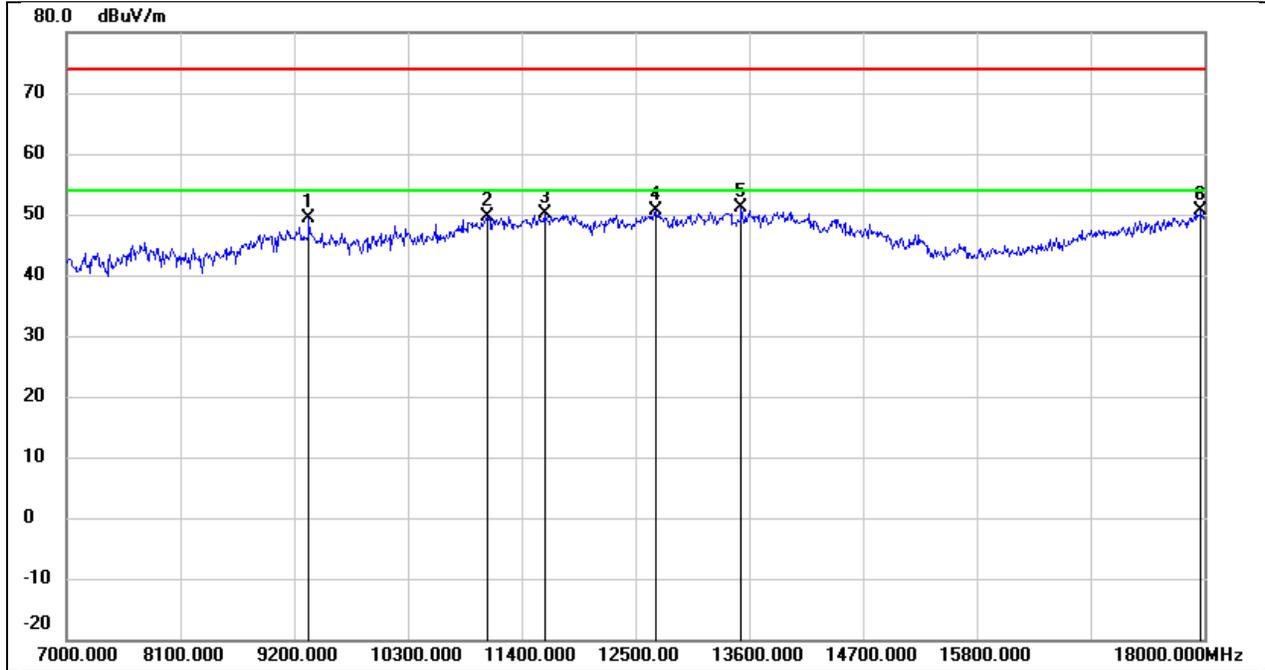


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	38.79	10.55	49.34	74.00	-24.66	peak
2	11070.000	34.57	15.01	49.58	74.00	-24.42	peak
3	11620.000	33.11	16.99	50.10	74.00	-23.90	peak
4	12698.000	32.49	18.08	50.57	74.00	-23.43	peak
5	13523.000	30.49	20.70	51.19	74.00	-22.81	peak
6	17967.000	24.63	25.89	50.52	74.00	-23.48	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3V

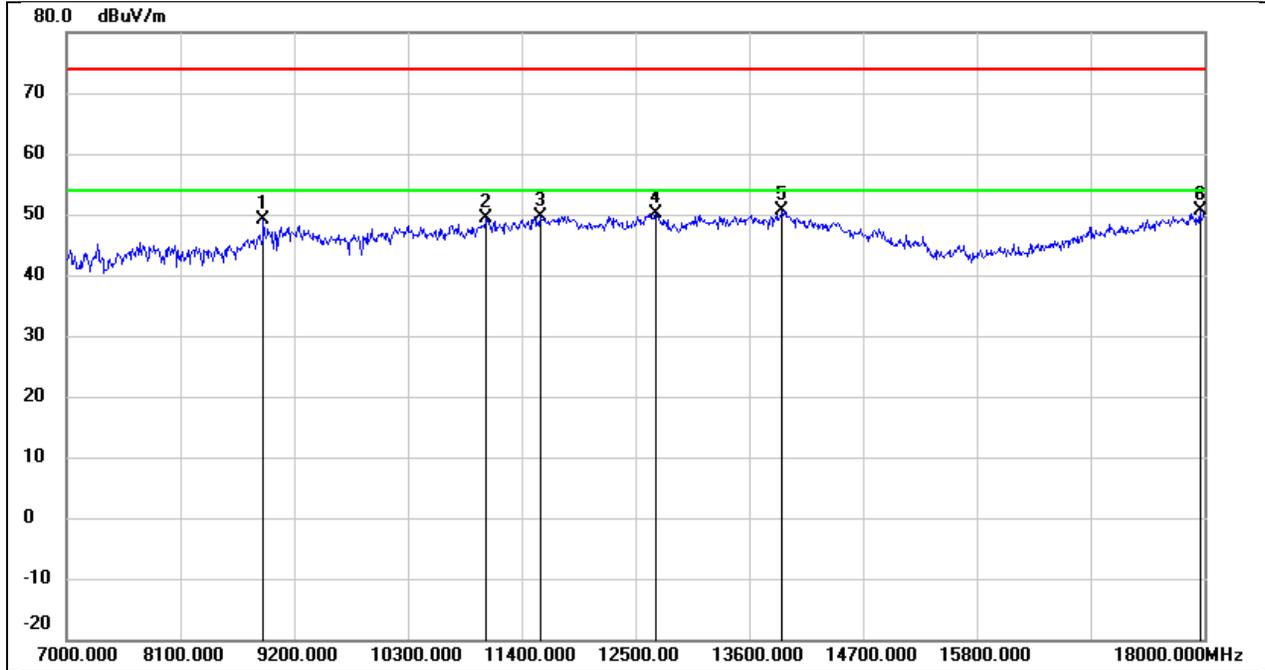


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8903.000	39.44	9.66	49.10	74.00	-24.90	peak
2	11059.000	34.40	14.96	49.36	74.00	-24.64	peak
3	11576.000	32.75	16.91	49.66	74.00	-24.34	peak
4	12698.000	32.17	18.08	50.25	74.00	-23.75	peak
5	13919.000	28.97	21.68	50.65	74.00	-23.35	peak
6	17956.000	24.86	25.82	50.68	74.00	-23.32	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.3V

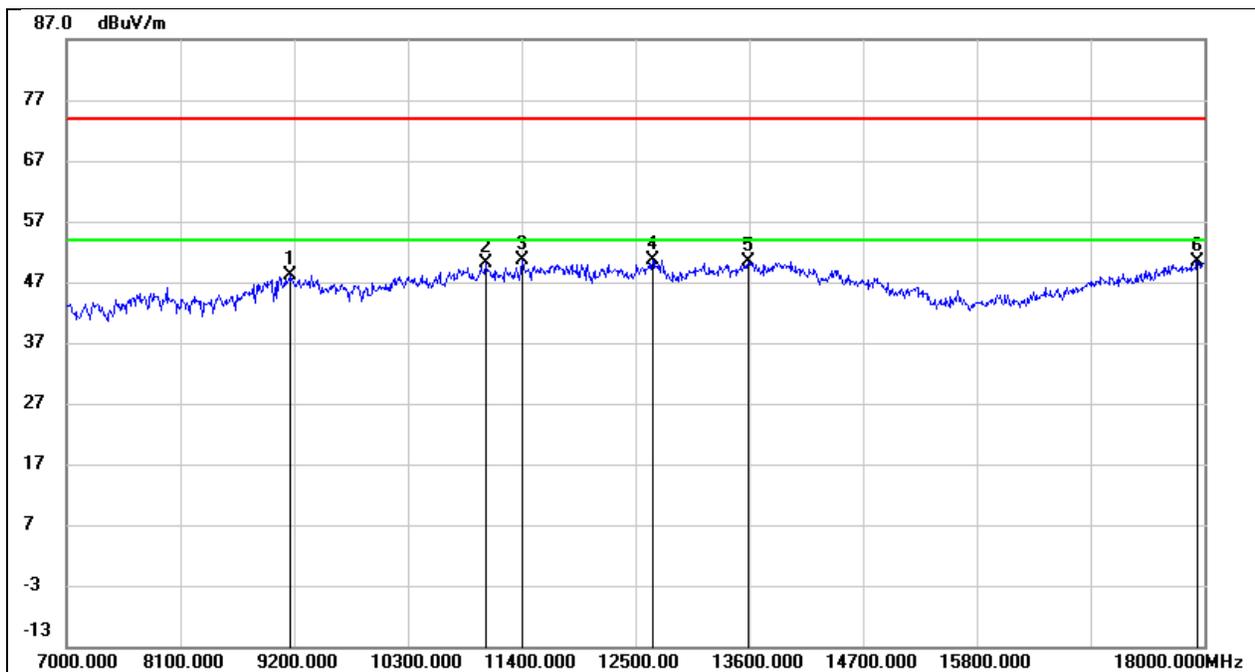


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9156.000	37.75	10.44	48.19	74.00	-25.81	peak
2	11048.000	35.18	14.91	50.09	74.00	-23.91	peak
3	11400.000	34.17	16.36	50.53	74.00	-23.47	peak
4	12665.000	32.69	18.04	50.73	74.00	-23.27	peak
5	13589.000	29.50	20.86	50.36	74.00	-23.64	peak
6	17934.000	24.77	25.67	50.44	74.00	-23.56	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3V

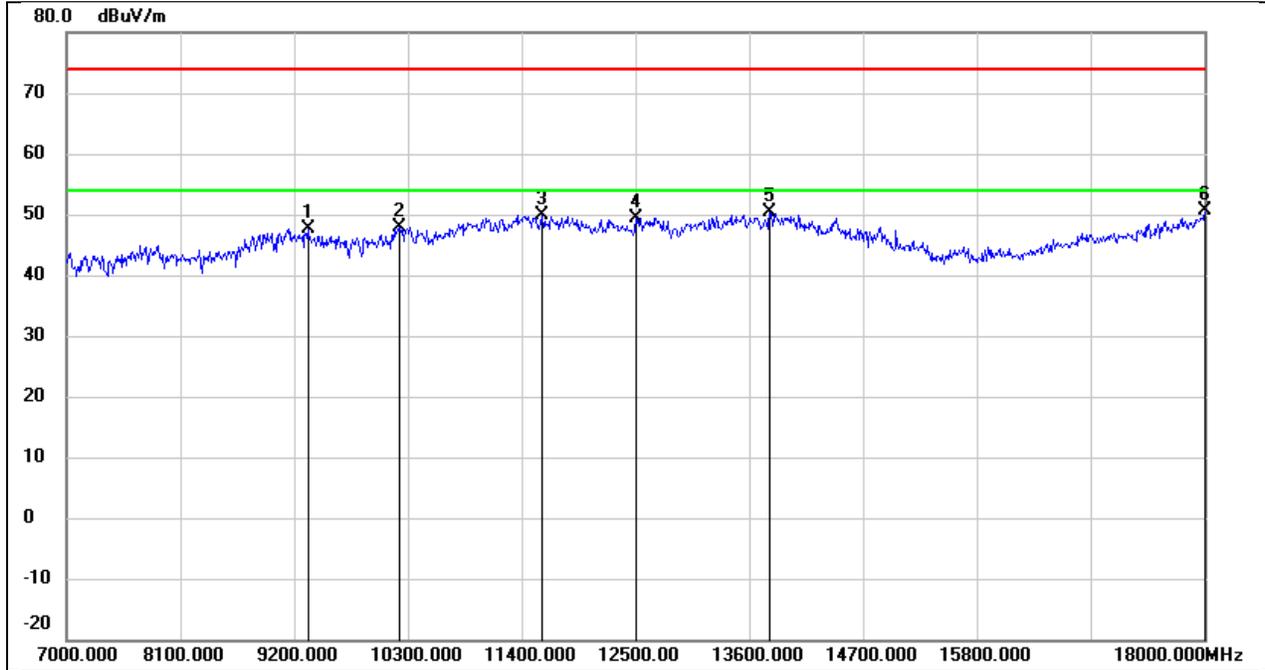


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.13	10.54	47.67	74.00	-26.33	peak
2	10223.000	35.70	12.24	47.94	74.00	-26.06	peak
3	11598.000	32.89	16.96	49.85	74.00	-24.15	peak
4	12500.000	31.58	17.83	49.41	74.00	-24.59	peak
5	13798.000	28.91	21.38	50.29	74.00	-23.71	peak
6	18000.000	24.54	26.12	50.66	74.00	-23.34	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3V

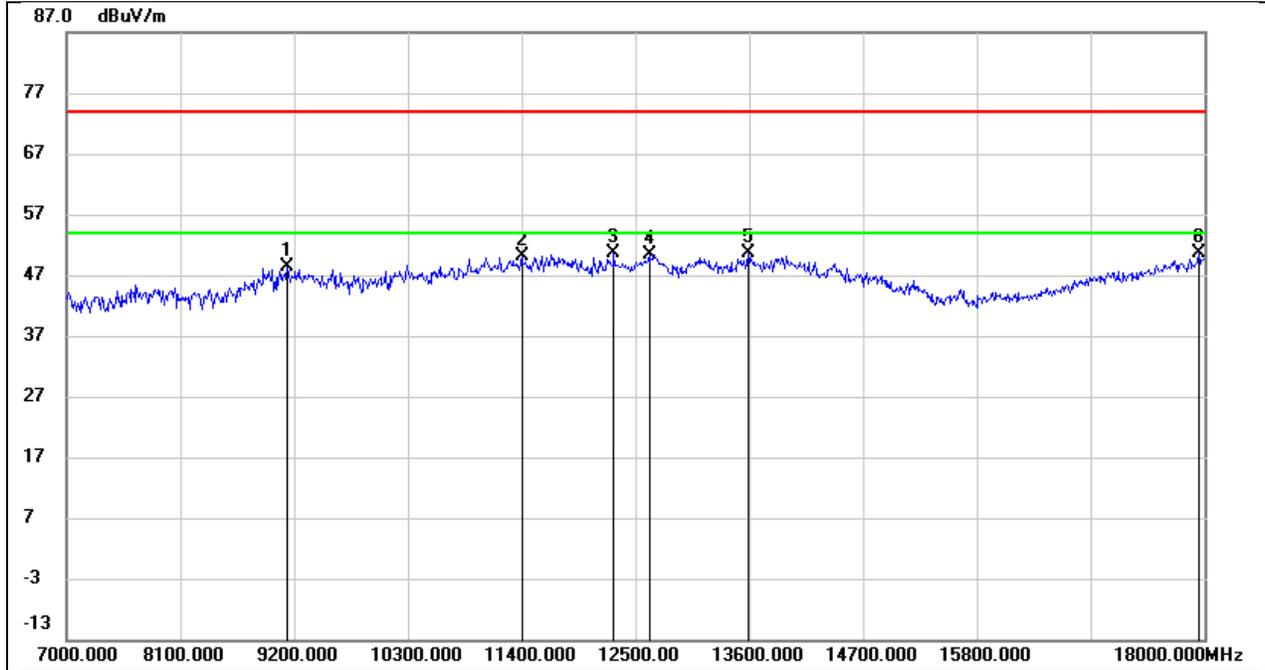


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.86	10.41	48.27	74.00	-25.73	peak
2	11400.000	33.71	16.36	50.07	74.00	-23.93	peak
3	12291.000	32.74	17.78	50.52	74.00	-23.48	peak
4	12632.000	32.35	17.99	50.34	74.00	-23.66	peak
5	13589.000	29.88	20.86	50.74	74.00	-23.26	peak
6	17945.000	24.88	25.75	50.63	74.00	-23.37	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

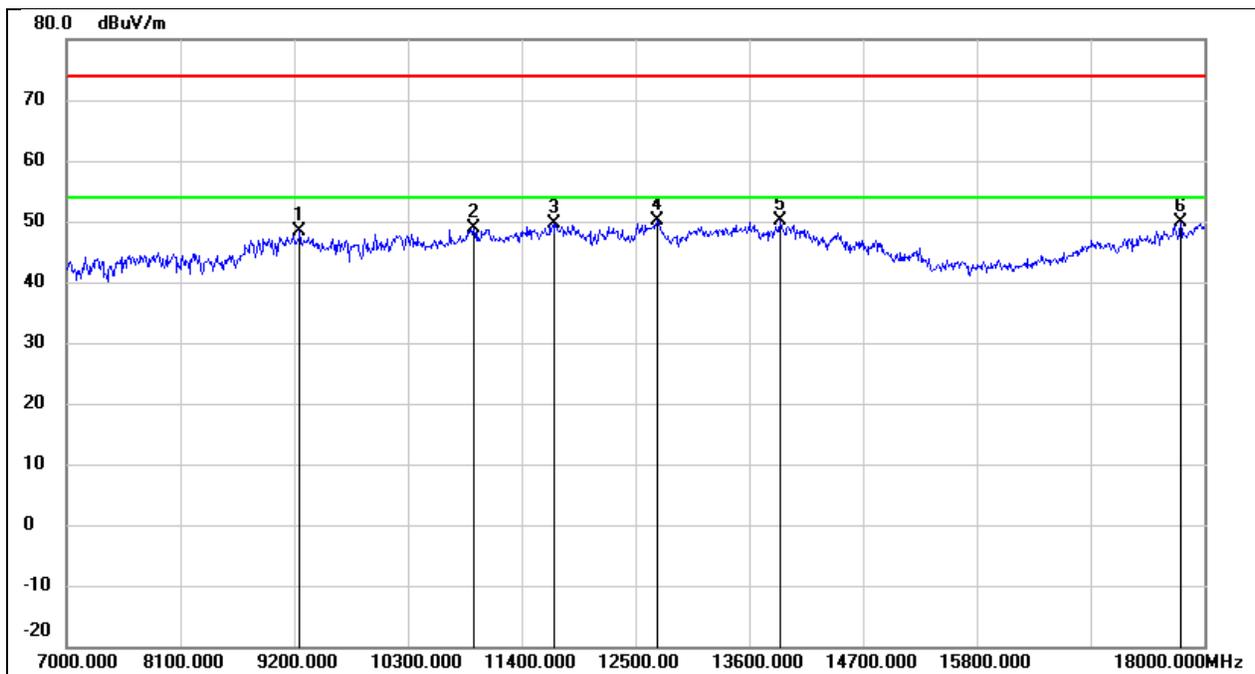


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.84	10.51	48.35	74.00	-25.65	peak
2	10938.000	34.36	14.48	48.84	74.00	-25.16	peak
3	11708.000	32.50	17.16	49.66	74.00	-24.34	peak
4	12709.000	31.92	18.09	50.01	74.00	-23.99	peak
5	13897.000	28.46	21.62	50.08	74.00	-23.92	peak
6	17769.000	25.33	24.53	49.86	74.00	-24.14	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3V

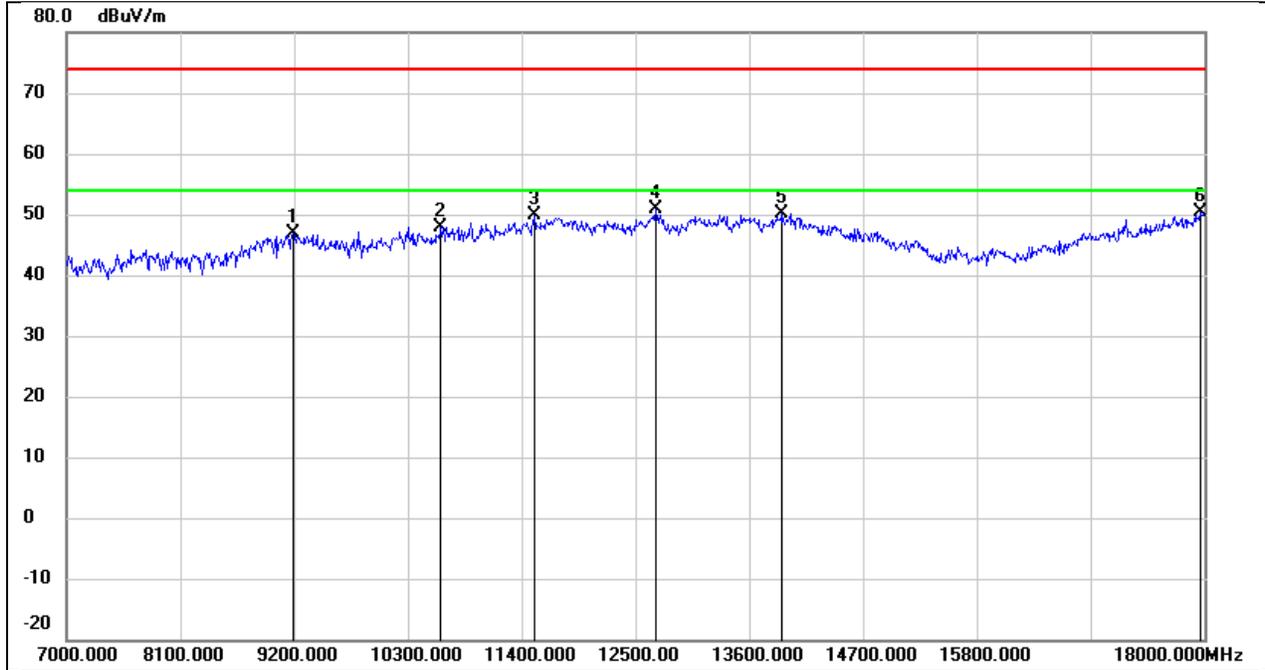


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	36.46	10.46	46.92	74.00	-27.08	peak
2	10619.000	34.64	13.28	47.92	74.00	-26.08	peak
3	11521.000	32.95	16.82	49.77	74.00	-24.23	peak
4	12698.000	32.74	18.08	50.82	74.00	-23.18	peak
5	13919.000	28.42	21.68	50.10	74.00	-23.90	peak
6	17956.000	24.47	25.82	50.29	74.00	-23.71	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3V

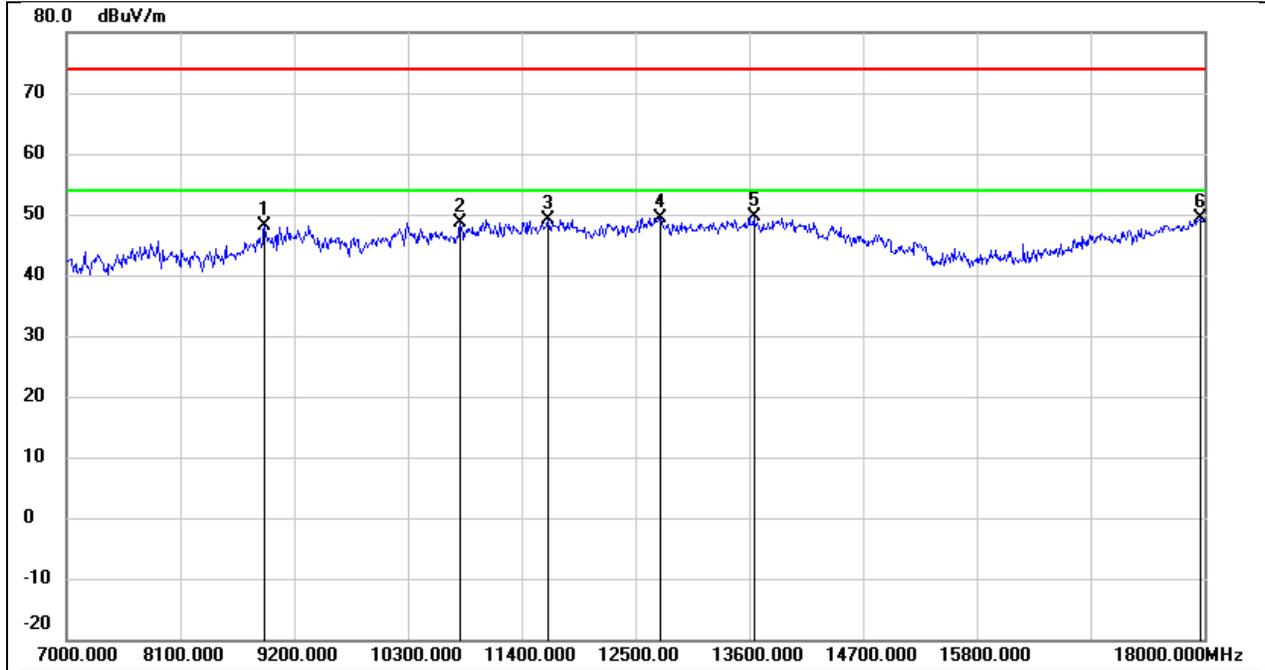


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8914.000	38.34	9.75	48.09	74.00	-25.91	peak
2	10806.000	34.56	13.98	48.54	74.00	-25.46	peak
3	11653.000	32.18	17.05	49.23	74.00	-24.77	peak
4	12742.000	31.36	18.13	49.49	74.00	-24.51	peak
5	13644.000	28.74	20.99	49.73	74.00	-24.27	peak
6	17967.000	23.37	25.89	49.26	74.00	-24.74	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3V

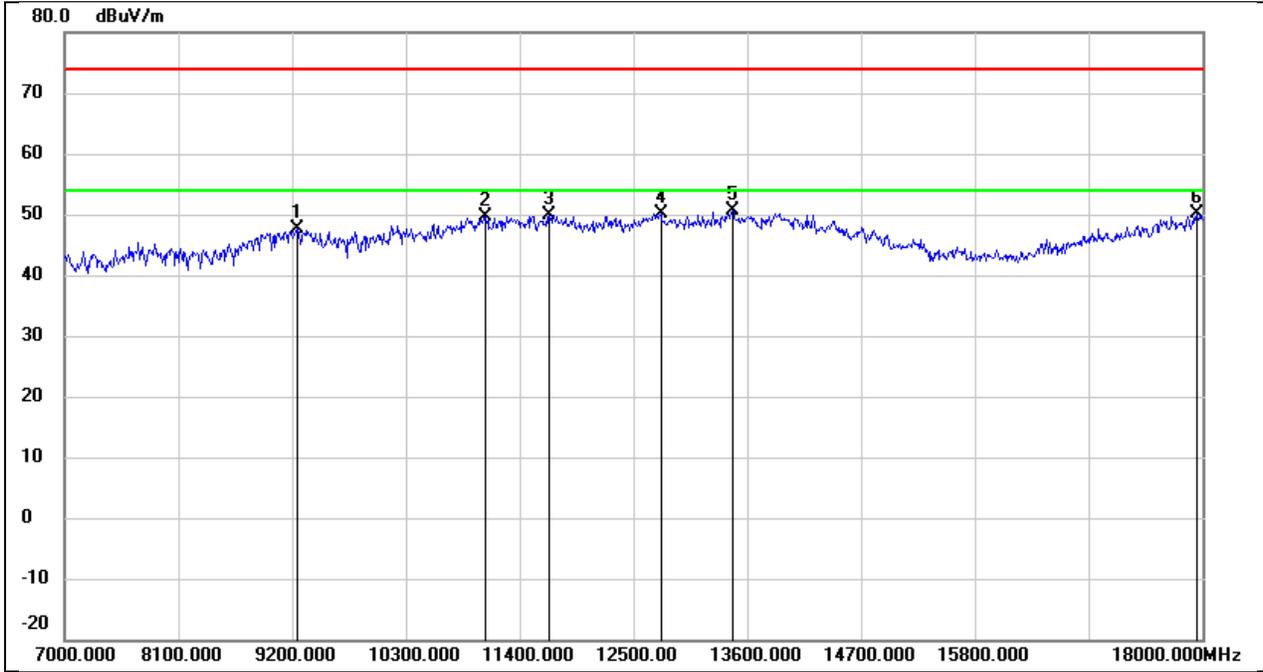


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.22	10.51	47.73	74.00	-26.27	peak
2	11070.000	34.57	15.01	49.58	74.00	-24.42	peak
3	11686.000	32.69	17.12	49.81	74.00	-24.19	peak
4	12764.000	31.96	18.16	50.12	74.00	-23.88	peak
5	13457.000	30.18	20.46	50.64	74.00	-23.36	peak
6	17945.000	24.31	25.75	50.06	74.00	-23.94	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

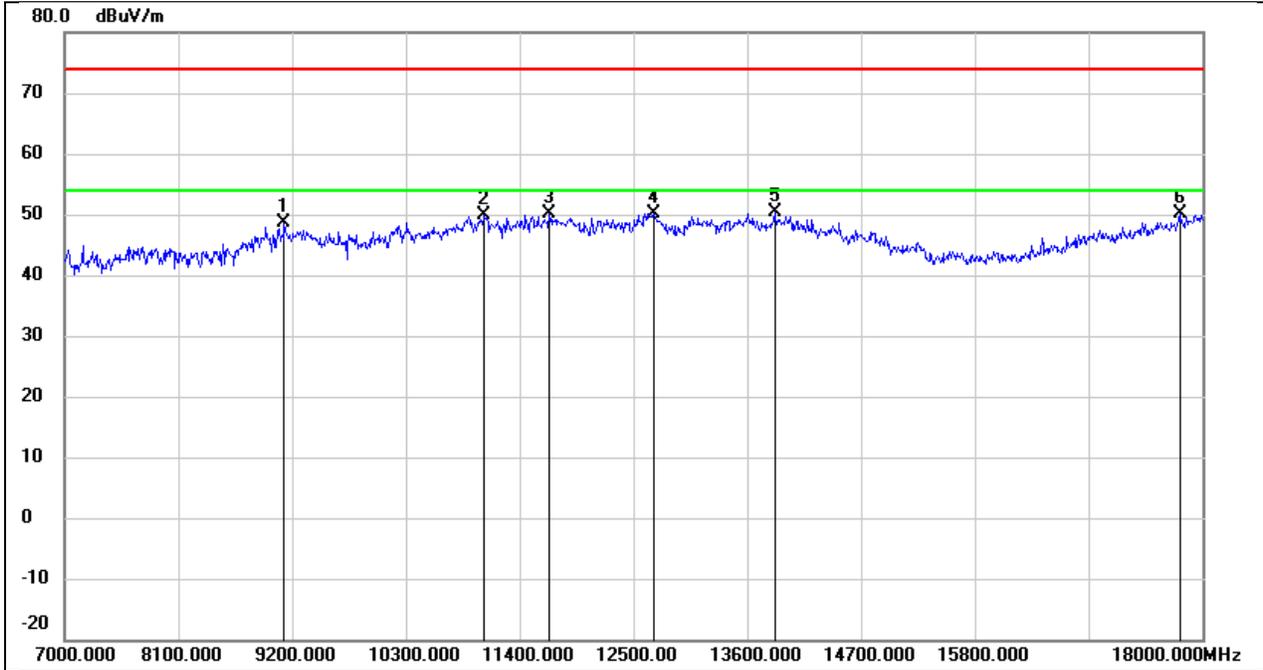


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	38.26	10.42	48.68	74.00	-25.32	peak
2	11059.000	34.91	14.96	49.87	74.00	-24.13	peak
3	11686.000	33.03	17.12	50.15	74.00	-23.85	peak
4	12698.000	32.16	18.08	50.24	74.00	-23.76	peak
5	13864.000	28.81	21.53	50.34	74.00	-23.66	peak
6	17780.000	25.63	24.61	50.24	74.00	-23.76	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3V

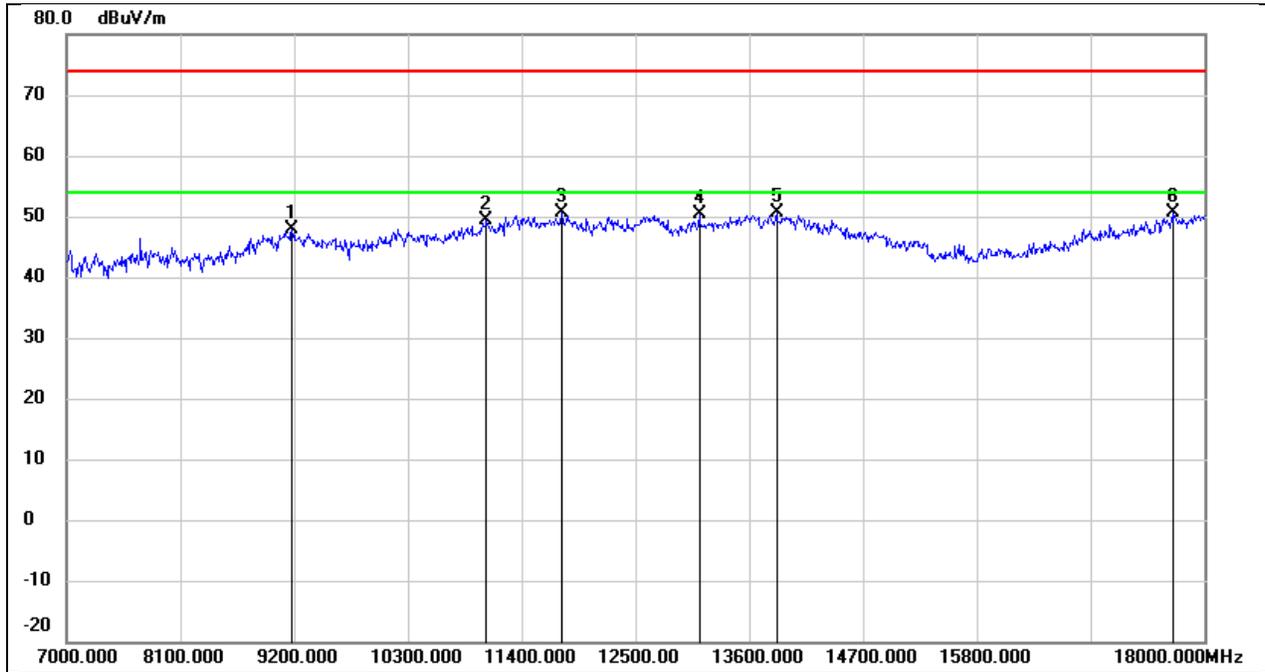


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	37.40	10.45	47.85	74.00	-26.15	peak
2	11059.000	34.30	14.96	49.26	74.00	-24.74	peak
3	11785.000	33.25	17.30	50.55	74.00	-23.45	peak
4	13116.000	31.41	18.96	50.37	74.00	-23.63	peak
5	13864.000	29.06	21.53	50.59	74.00	-23.41	peak
6	17703.000	26.45	24.09	50.54	74.00	-23.46	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3V

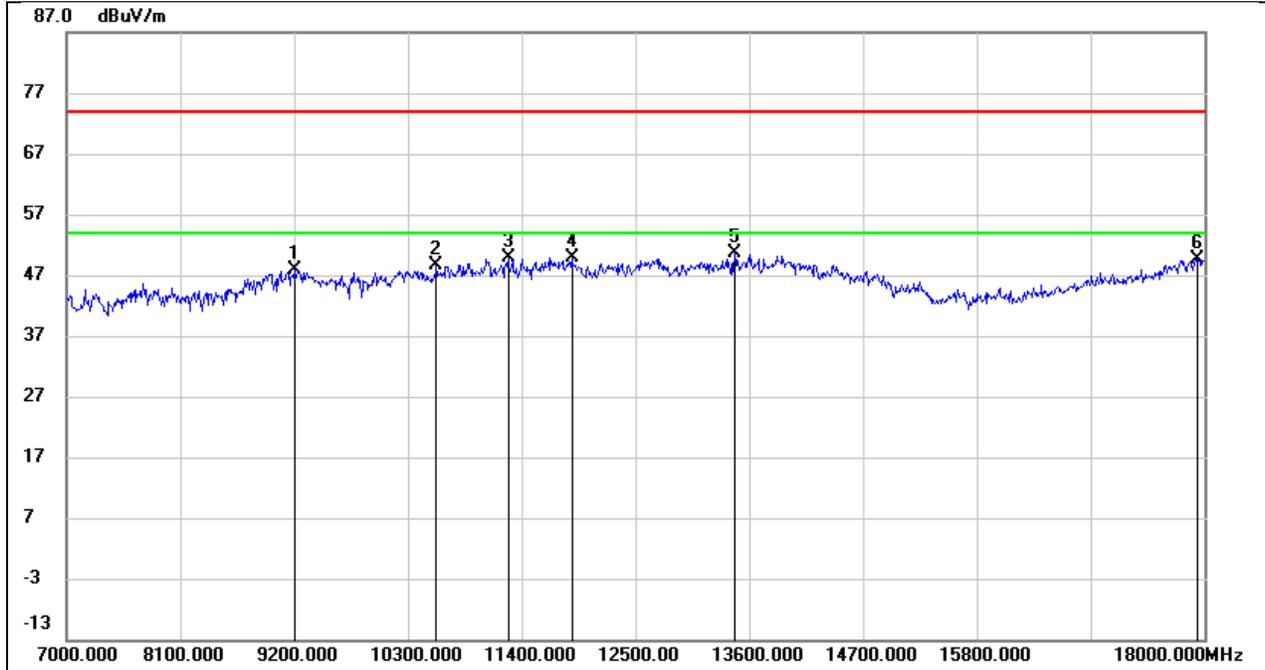


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	37.32	10.46	47.78	74.00	-26.22	peak
2	10575.000	35.48	13.10	48.58	74.00	-25.42	peak
3	11268.000	34.08	15.83	49.91	74.00	-24.09	peak
4	11884.000	32.30	17.48	49.78	74.00	-24.22	peak
5	13457.000	30.20	20.46	50.66	74.00	-23.34	peak
6	17934.000	23.96	25.67	49.63	74.00	-24.37	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 3.3V

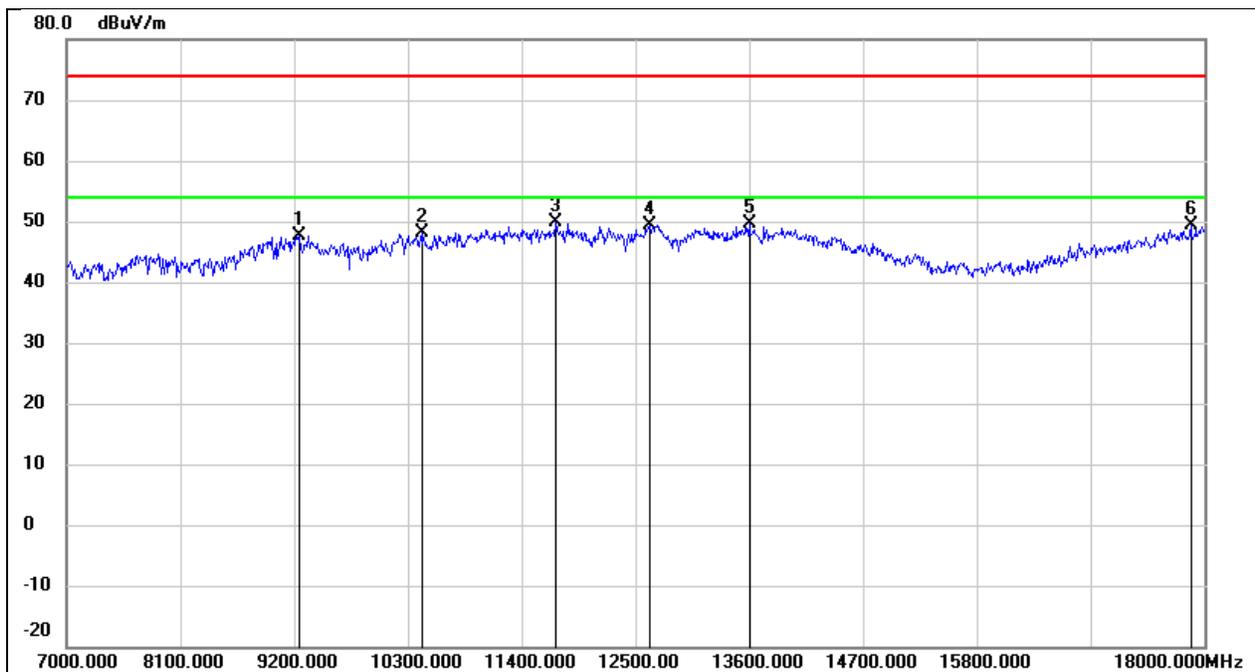


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.24	10.49	47.73	74.00	-26.27	peak
2	10432.000	35.41	12.67	48.08	74.00	-25.92	peak
3	11730.000	32.68	17.19	49.87	74.00	-24.13	peak
4	12643.000	31.42	18.01	49.43	74.00	-24.57	peak
5	13600.000	28.70	20.89	49.59	74.00	-24.41	peak
6	17868.000	24.07	25.22	49.29	74.00	-24.71	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3V

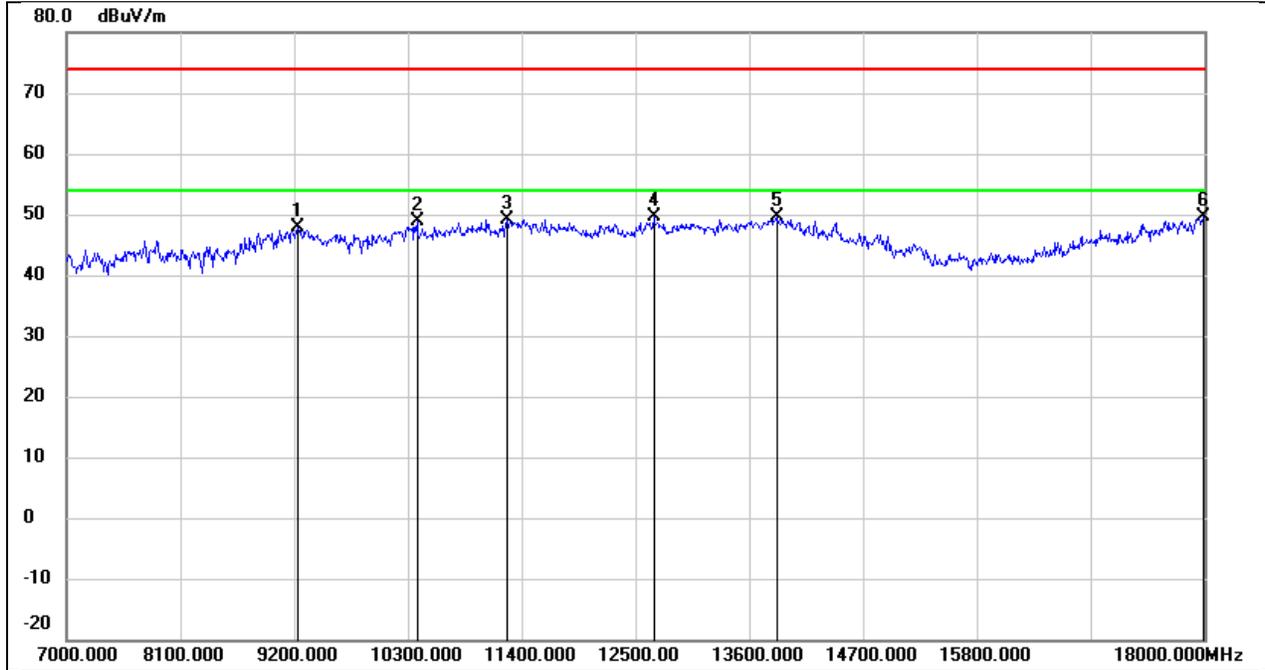


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.35	10.48	47.83	74.00	-26.17	peak
2	10388.000	36.34	12.59	48.93	74.00	-25.07	peak
3	11257.000	33.38	15.78	49.16	74.00	-24.84	peak
4	12676.000	31.50	18.05	49.55	74.00	-24.45	peak
5	13864.000	28.04	21.53	49.57	74.00	-24.43	peak
6	17989.000	23.62	26.04	49.66	74.00	-24.34	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 3.3V

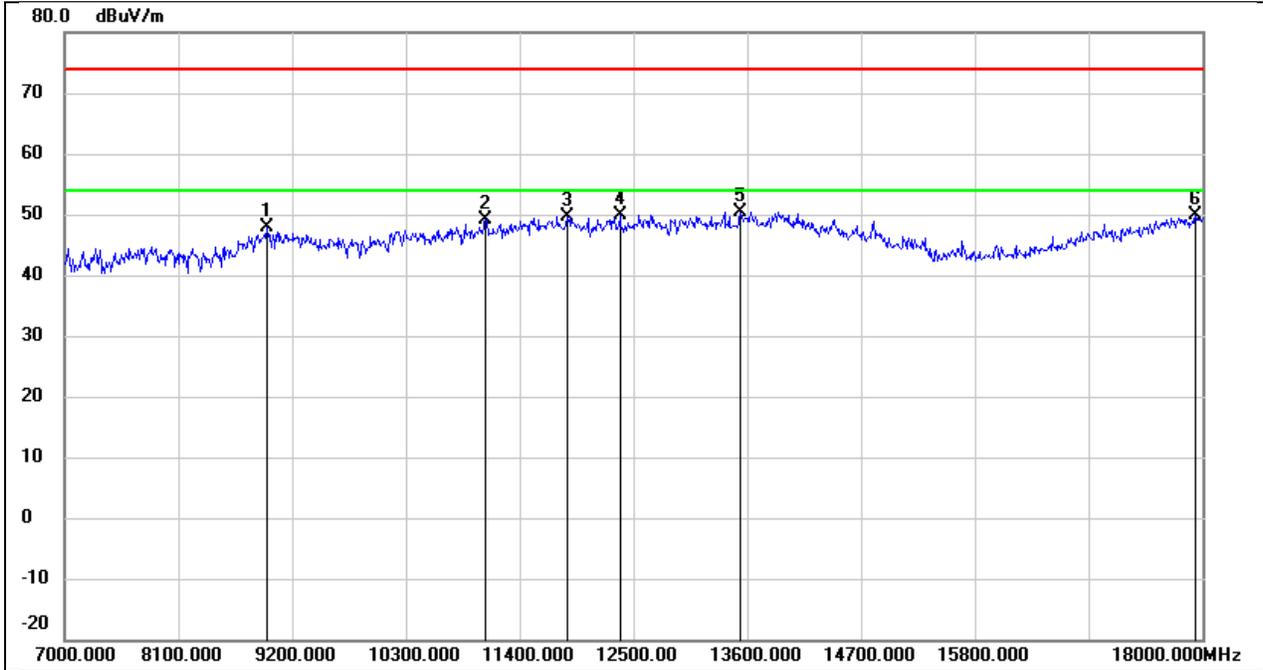


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8958.000	37.92	10.05	47.97	74.00	-26.03	peak
2	11070.000	34.06	15.01	49.07	74.00	-24.93	peak
3	11862.000	32.27	17.45	49.72	74.00	-24.28	peak
4	12368.000	32.20	17.80	50.00	74.00	-24.00	peak
5	13534.000	29.75	20.73	50.48	74.00	-23.52	peak
6	17934.000	24.19	25.67	49.86	74.00	-24.14	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3V

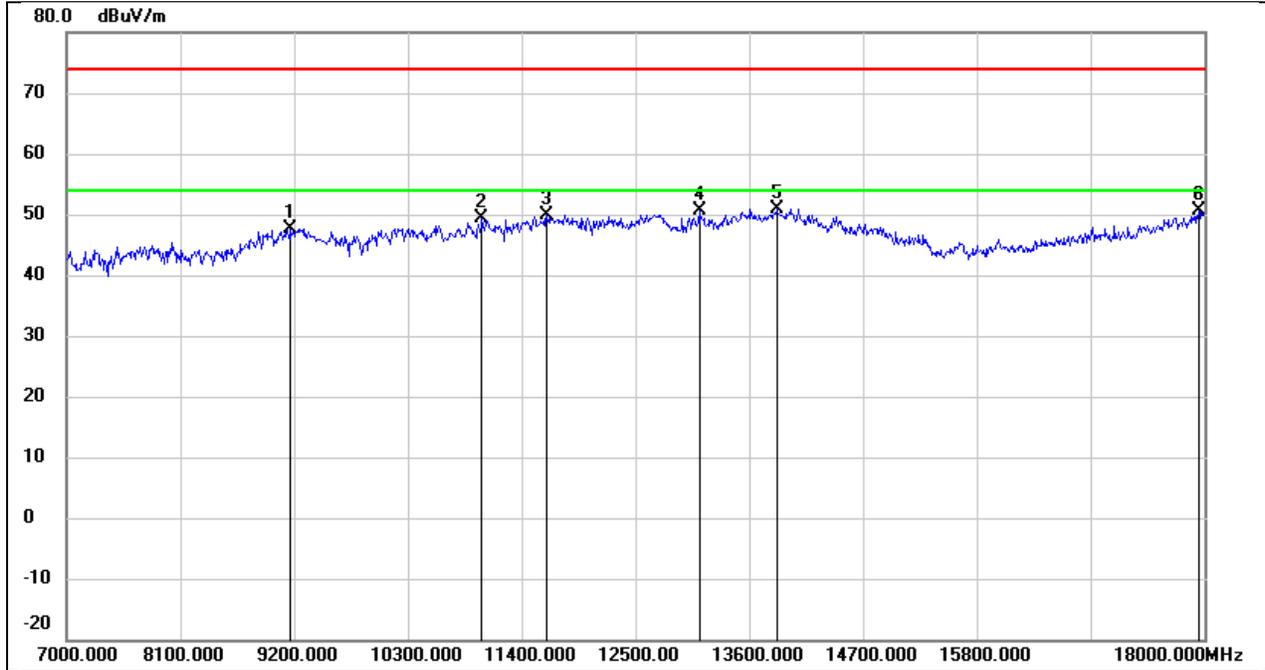


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	37.22	10.45	47.67	74.00	-26.33	peak
2	11015.000	34.59	14.79	49.38	74.00	-24.62	peak
3	11642.000	32.84	17.03	49.87	74.00	-24.13	peak
4	13116.000	31.68	18.96	50.64	74.00	-23.36	peak
5	13864.000	29.26	21.53	50.79	74.00	-23.21	peak
6	17945.000	24.82	25.75	50.57	74.00	-23.43	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 3.3V

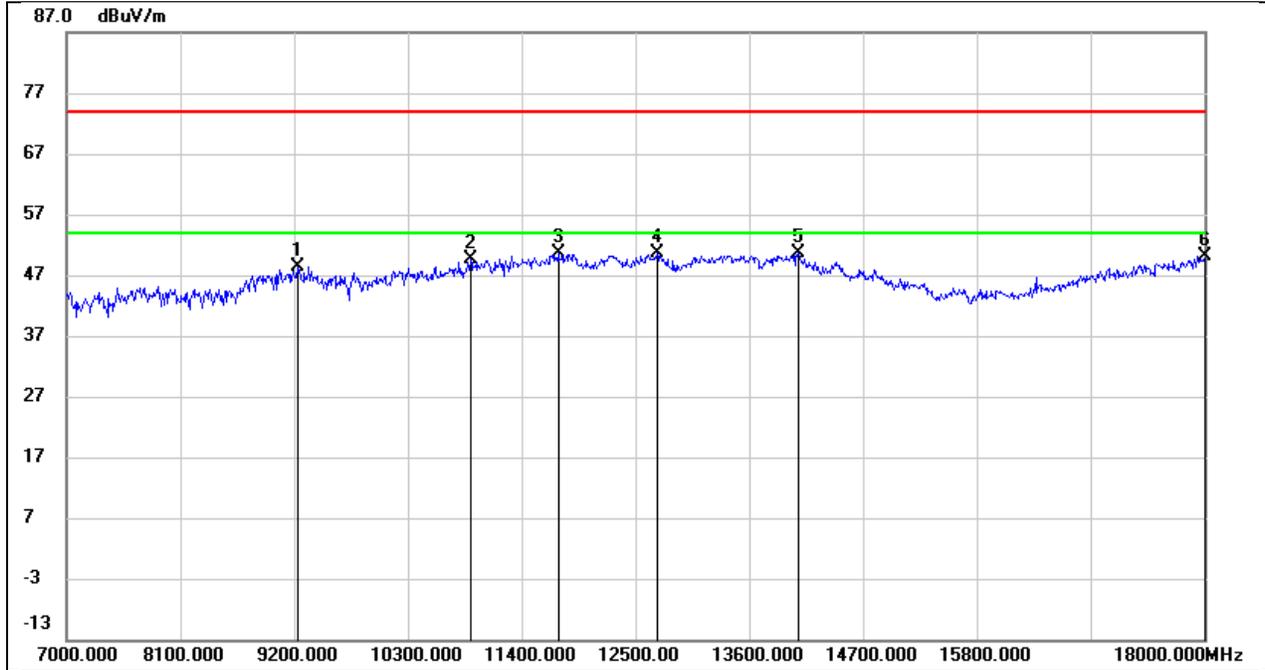


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.84	10.48	48.32	74.00	-25.68	peak
2	10905.000	35.33	14.36	49.69	74.00	-24.31	peak
3	11752.000	33.43	17.24	50.67	74.00	-23.33	peak
4	12709.000	32.58	18.09	50.67	74.00	-23.33	peak
5	14073.000	29.06	21.57	50.63	74.00	-23.37	peak
6	18000.000	24.00	26.12	50.12	74.00	-23.88	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3V

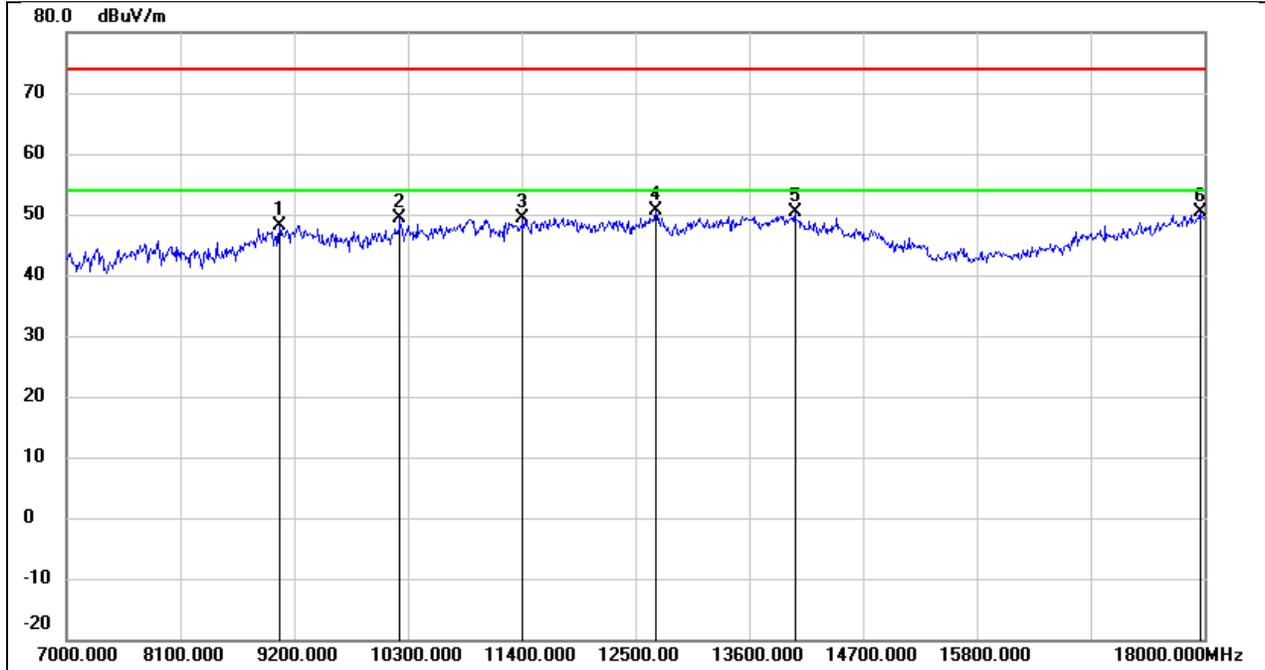


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.66	10.38	48.04	74.00	-25.96	peak
2	10223.000	37.09	12.24	49.33	74.00	-24.67	peak
3	11411.000	33.09	16.41	49.50	74.00	-24.50	peak
4	12698.000	32.61	18.08	50.69	74.00	-23.31	peak
5	14040.000	28.67	21.70	50.37	74.00	-23.63	peak
6	17956.000	24.68	25.82	50.50	74.00	-23.50	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 3.3V

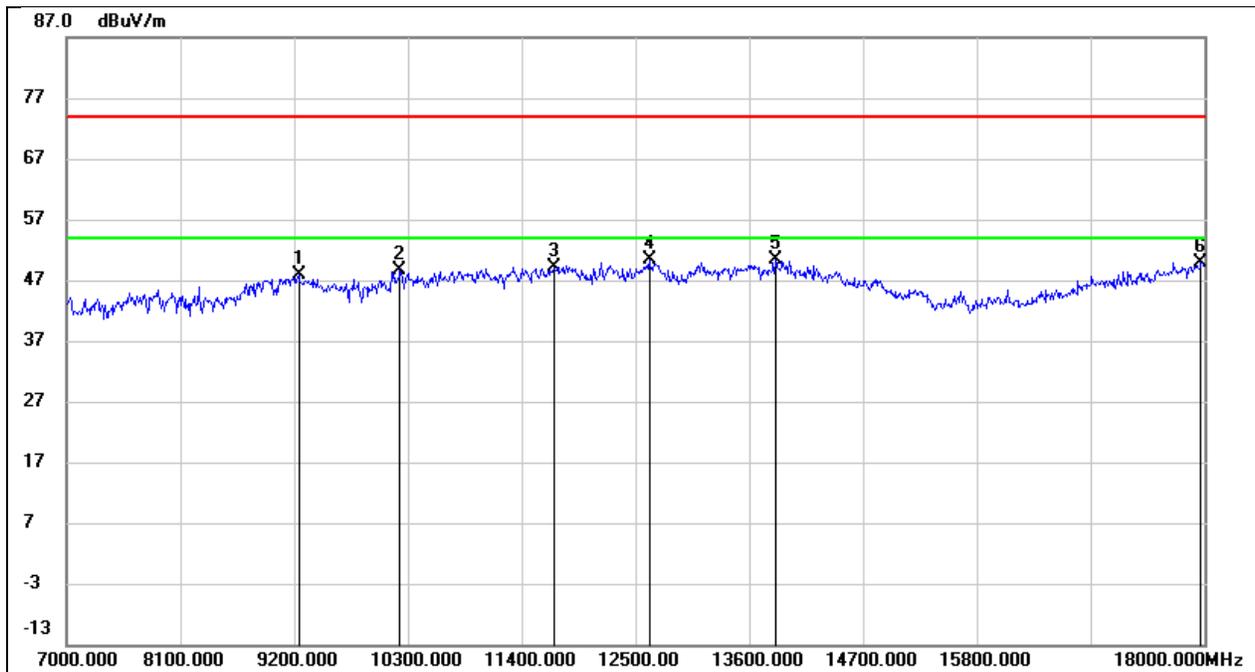


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.51	10.49	48.00	74.00	-26.00	peak
2	10223.000	36.46	12.24	48.70	74.00	-25.30	peak
3	11708.000	32.02	17.16	49.18	74.00	-24.82	peak
4	12632.000	32.42	17.99	50.41	74.00	-23.59	peak
5	13853.000	28.98	21.52	50.50	74.00	-23.50	peak
6	17967.000	24.11	25.89	50.00	74.00	-24.00	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3V

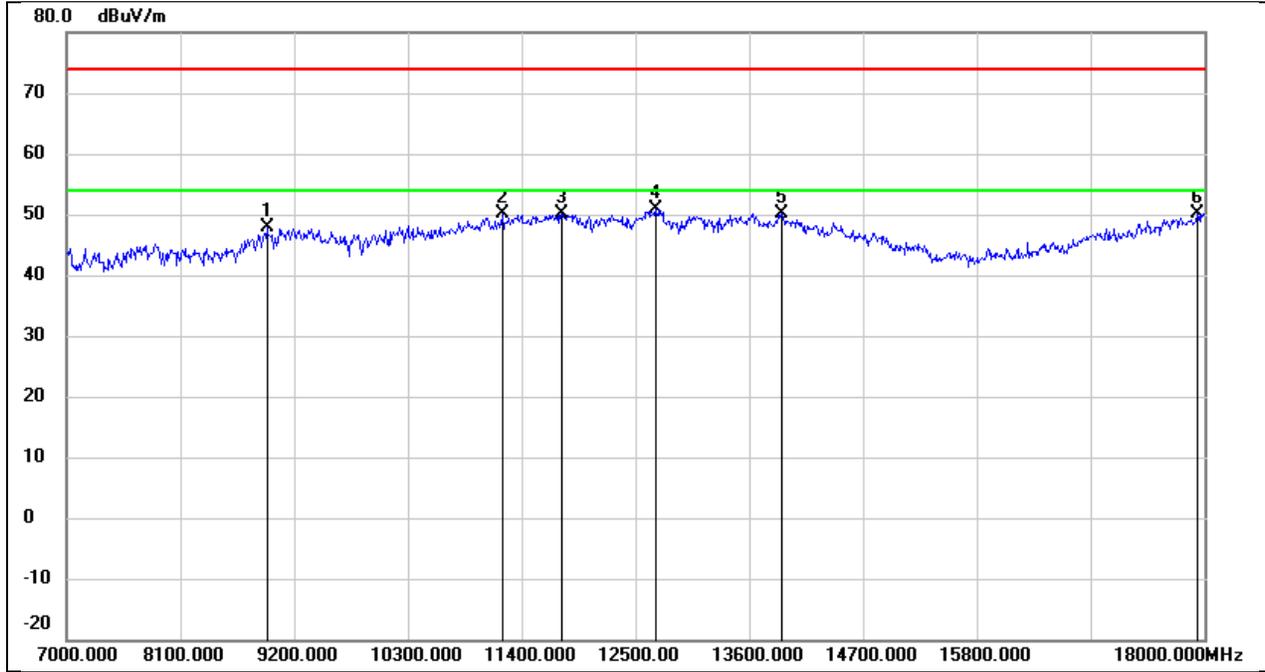


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8936.000	37.88	9.90	47.78	74.00	-26.22	peak
2	11213.000	34.55	15.59	50.14	74.00	-23.86	peak
3	11785.000	32.75	17.30	50.05	74.00	-23.95	peak
4	12698.000	32.83	18.08	50.91	74.00	-23.09	peak
5	13908.000	28.51	21.66	50.17	74.00	-23.83	peak
6	17934.000	24.45	25.67	50.12	74.00	-23.88	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 3.3V

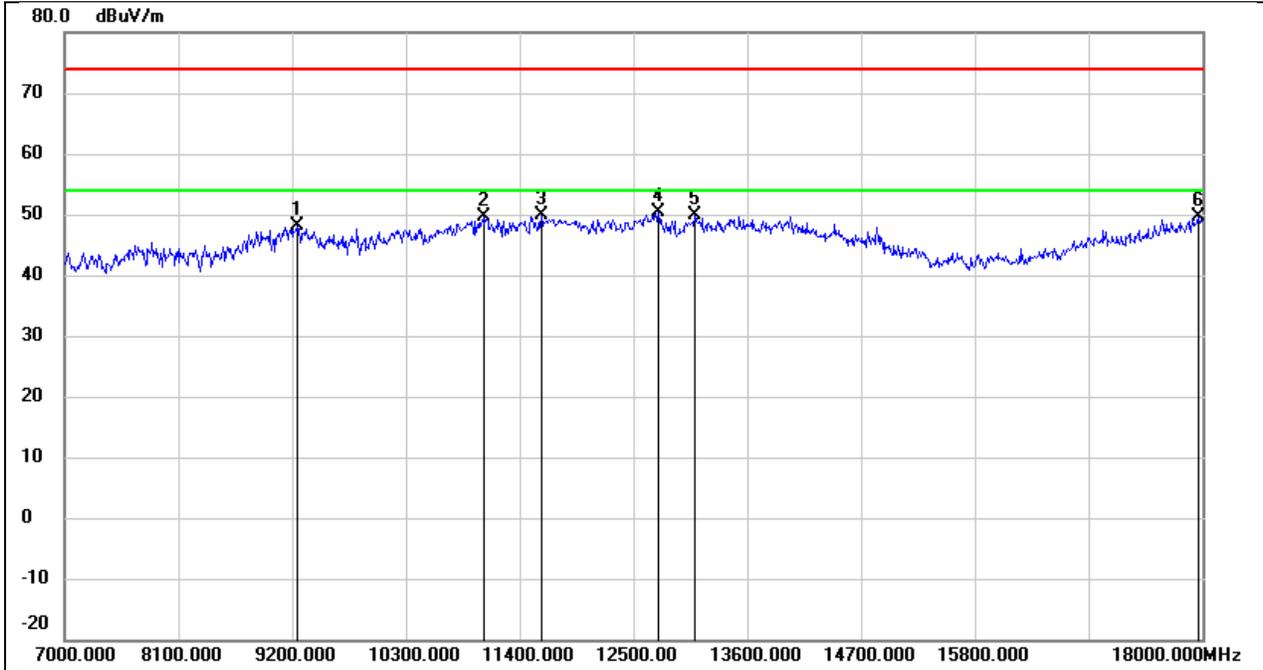


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.67	10.49	48.16	74.00	-25.84	peak
2	11059.000	34.62	14.96	49.58	74.00	-24.42	peak
3	11609.000	32.79	16.98	49.77	74.00	-24.23	peak
4	12742.000	32.18	18.13	50.31	74.00	-23.69	peak
5	13094.000	31.09	18.87	49.96	74.00	-24.04	peak
6	17956.000	23.76	25.82	49.58	74.00	-24.42	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 3.3V

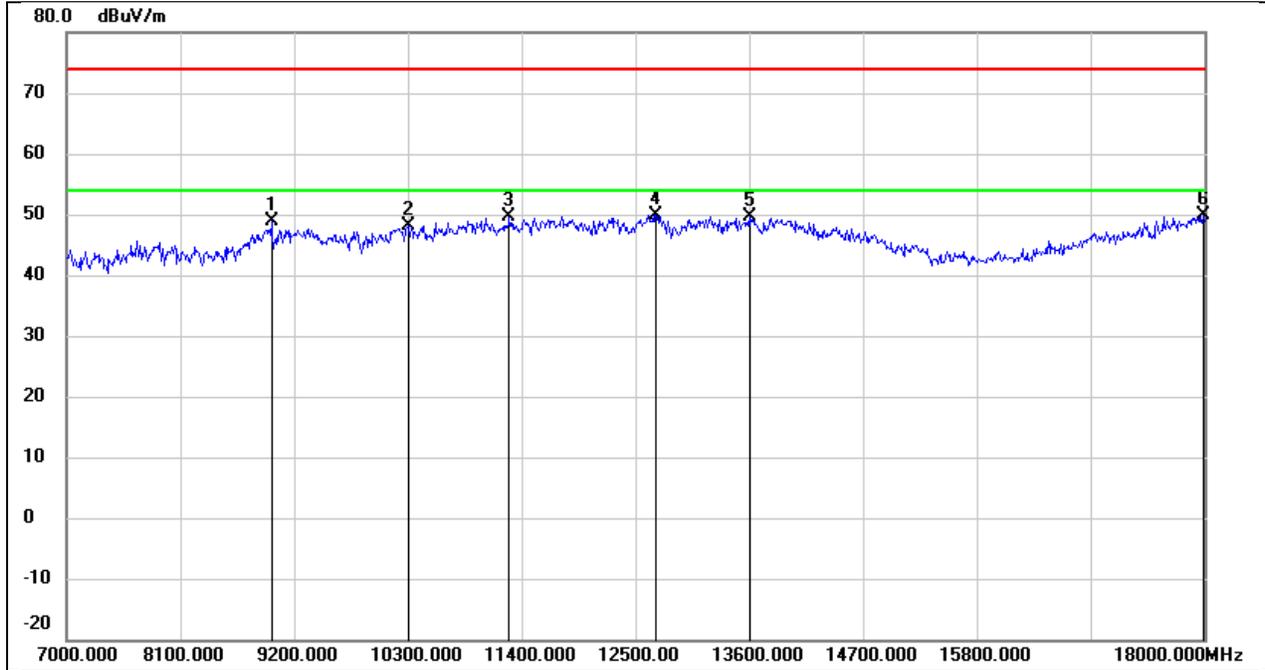


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	38.61	10.21	48.82	74.00	-25.18	peak
2	10300.000	35.65	12.40	48.05	74.00	-25.95	peak
3	11279.000	33.74	15.86	49.60	74.00	-24.40	peak
4	12698.000	31.79	18.08	49.87	74.00	-24.13	peak
5	13600.000	28.79	20.89	49.68	74.00	-24.32	peak
6	17989.000	23.77	26.04	49.81	74.00	-24.19	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 3.3V

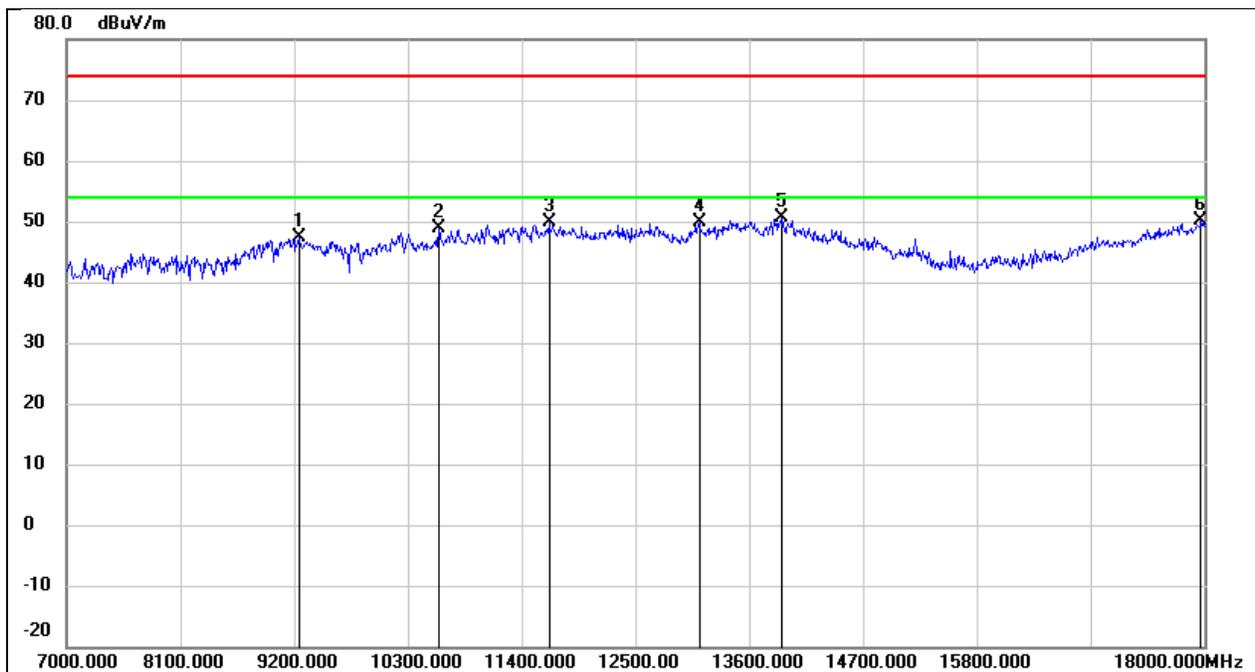


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	36.95	10.49	47.44	74.00	-26.56	peak
2	10597.000	35.66	13.19	48.85	74.00	-25.15	peak
3	11664.000	32.84	17.08	49.92	74.00	-24.08	peak
4	13116.000	30.86	18.96	49.82	74.00	-24.18	peak
5	13919.000	28.95	21.68	50.63	74.00	-23.37	peak
6	17967.000	24.19	25.89	50.08	74.00	-23.92	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 3.3V

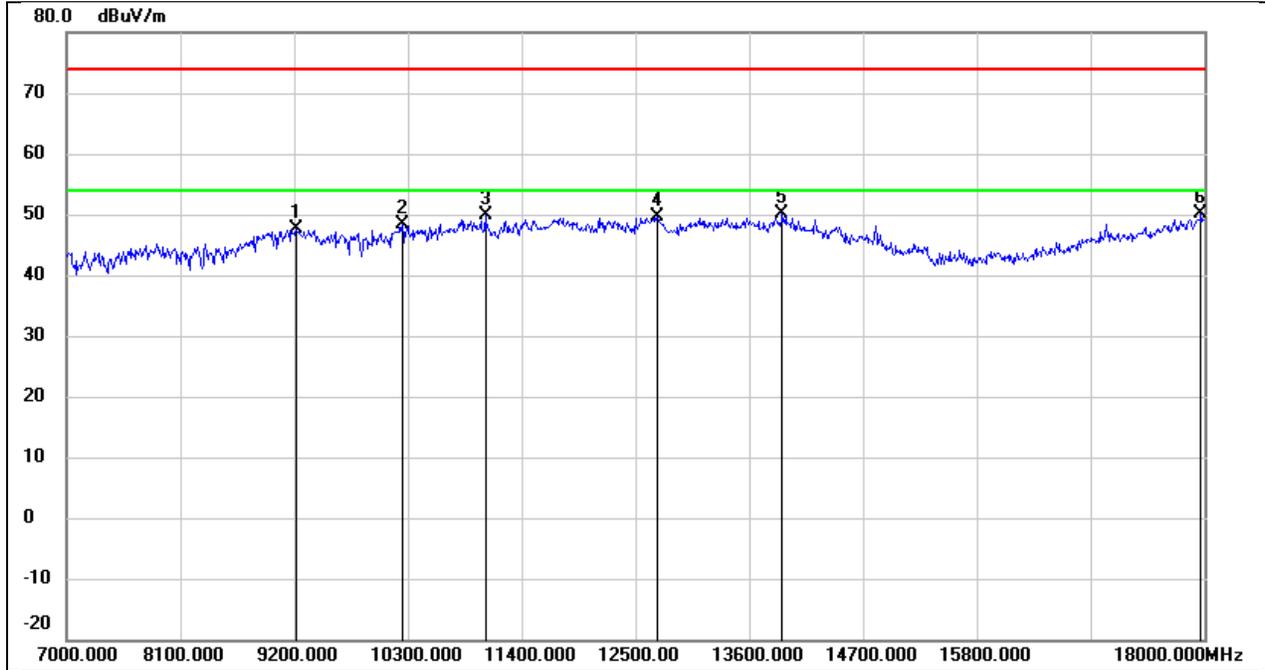


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	37.16	10.48	47.64	74.00	-26.36	peak
2	10245.000	36.12	12.28	48.40	74.00	-25.60	peak
3	11048.000	34.85	14.91	49.76	74.00	-24.24	peak
4	12709.000	31.54	18.09	49.63	74.00	-24.37	peak
5	13919.000	28.42	21.68	50.10	74.00	-23.90	peak
6	17967.000	24.26	25.89	50.15	74.00	-23.85	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 3.3V

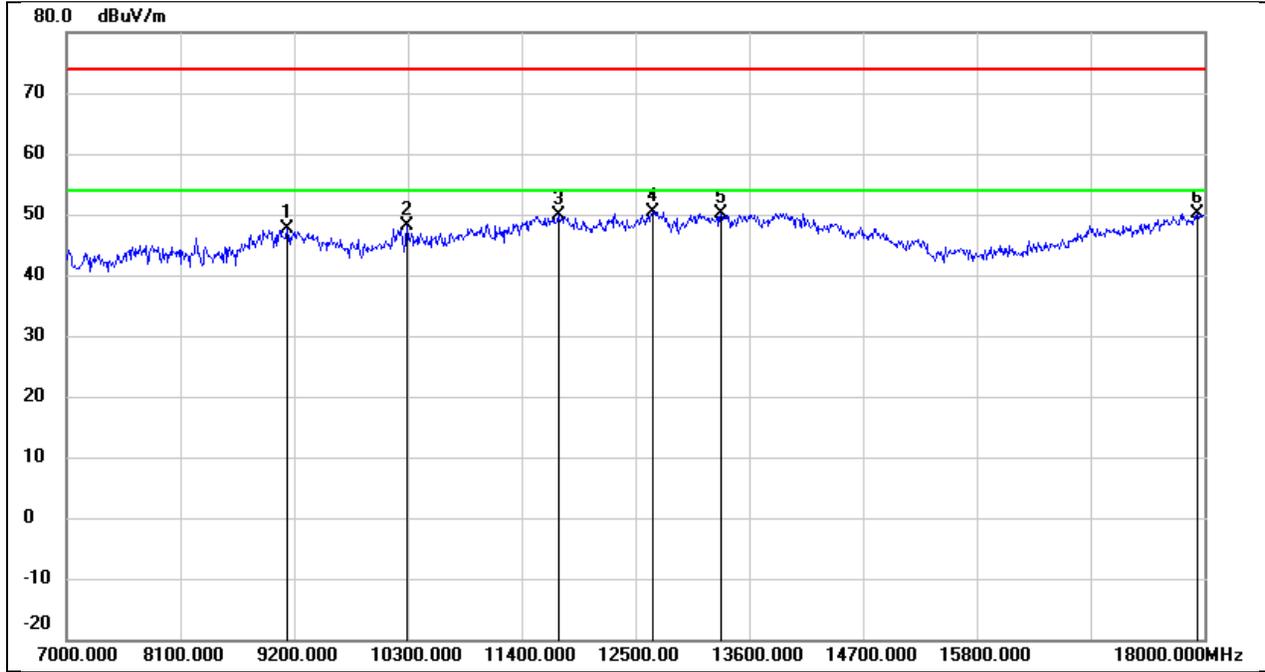


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.11	10.41	47.52	74.00	-26.48	peak
2	10289.000	35.64	12.38	48.02	74.00	-25.98	peak
3	11752.000	32.61	17.24	49.85	74.00	-24.15	peak
4	12665.000	32.42	18.04	50.46	74.00	-23.54	peak
5	13325.000	30.37	19.88	50.25	74.00	-23.75	peak
6	17934.000	24.52	25.67	50.19	74.00	-23.81	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 3.3V

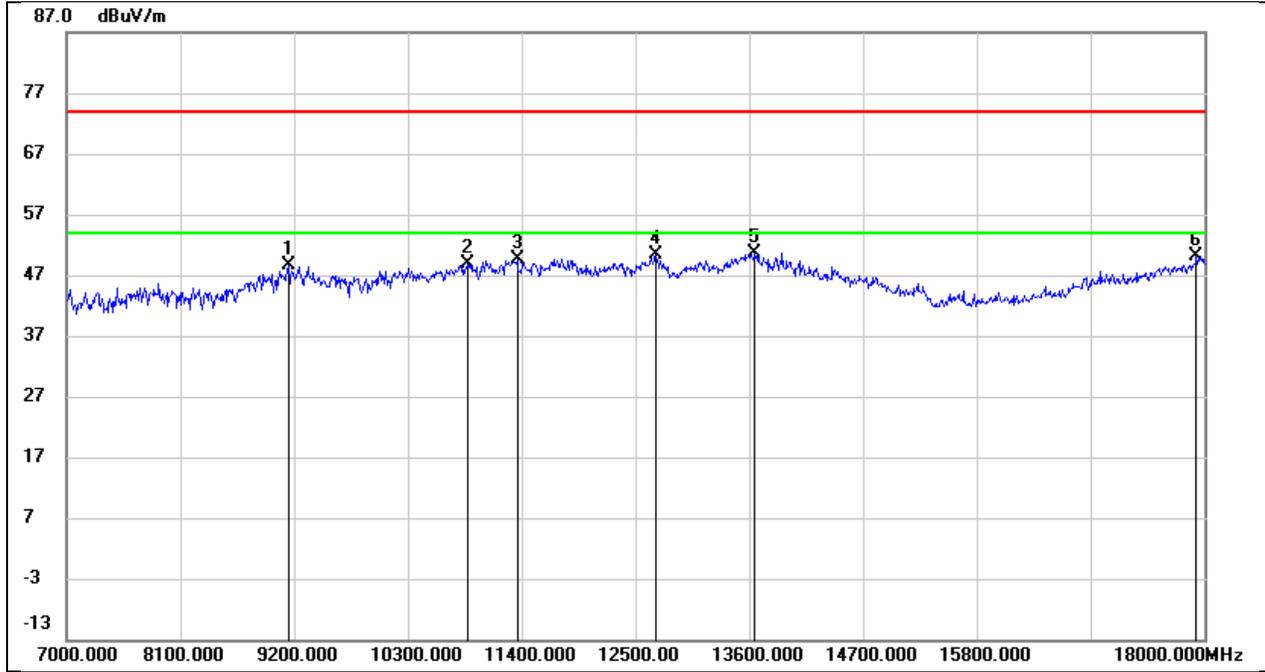


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	38.08	10.43	48.51	74.00	-25.49	peak
2	10883.000	34.65	14.27	48.92	74.00	-25.08	peak
3	11356.000	33.32	16.19	49.51	74.00	-24.49	peak
4	12698.000	32.31	18.08	50.39	74.00	-23.61	peak
5	13655.000	29.72	21.03	50.75	74.00	-23.25	peak
6	17923.000	24.51	25.60	50.11	74.00	-23.89	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 3.3V

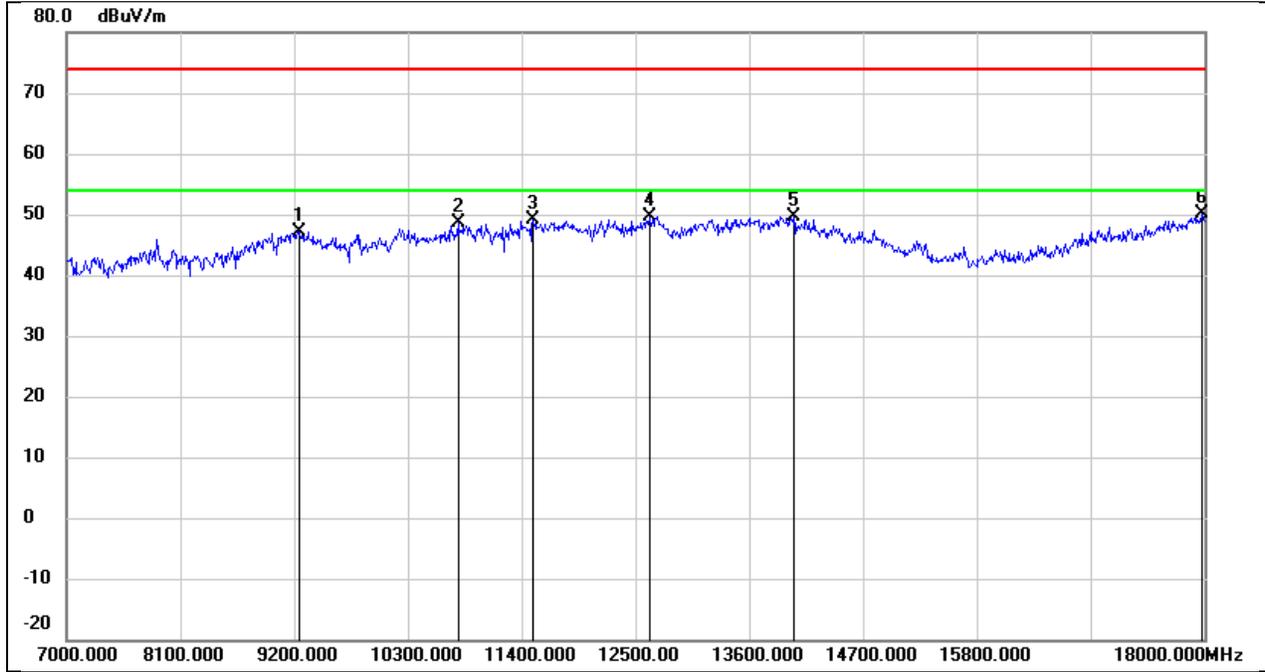


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	36.70	10.49	47.19	74.00	-26.81	peak
2	10784.000	34.81	13.91	48.72	74.00	-25.28	peak
3	11510.000	32.24	16.79	49.03	74.00	-24.97	peak
4	12643.000	31.70	18.01	49.71	74.00	-24.29	peak
5	14029.000	27.96	21.76	49.72	74.00	-24.28	peak
6	17978.000	24.12	25.97	50.09	74.00	-23.91	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.3V

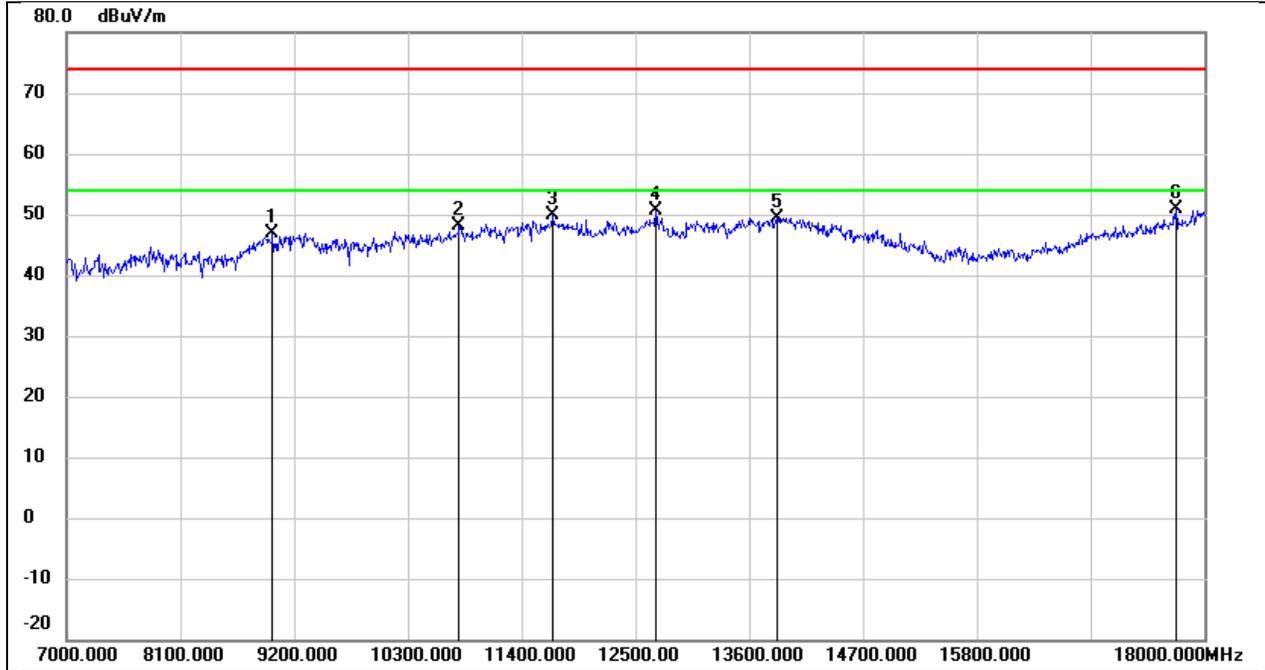


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	36.70	10.28	46.98	74.00	-27.02	peak
2	10795.000	34.10	13.94	48.04	74.00	-25.96	peak
3	11697.000	32.83	17.13	49.96	74.00	-24.04	peak
4	12698.000	32.49	18.08	50.57	74.00	-23.43	peak
5	13864.000	27.96	21.53	49.49	74.00	-24.51	peak
6	17725.000	26.60	24.24	50.84	74.00	-23.16	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 3.3V

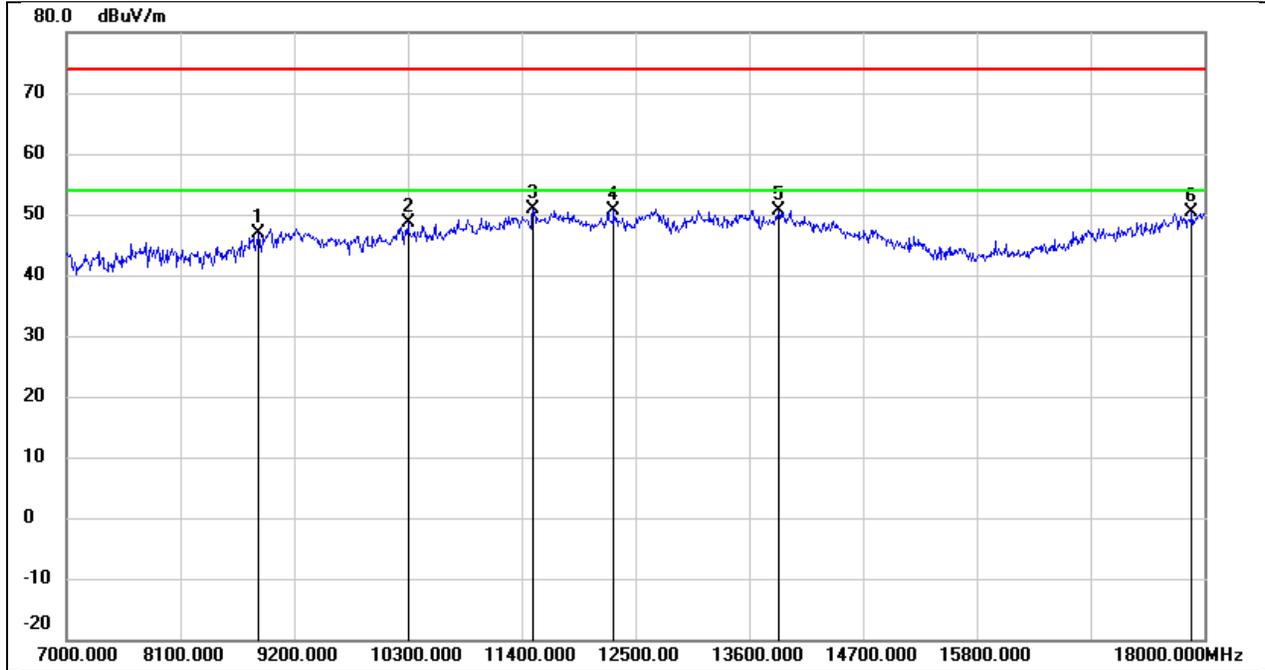


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8859.000	37.55	9.36	46.91	74.00	-27.09	peak
2	10300.000	36.14	12.40	48.54	74.00	-25.46	peak
3	11510.000	33.99	16.79	50.78	74.00	-23.22	peak
4	12291.000	32.96	17.78	50.74	74.00	-23.26	peak
5	13886.000	29.15	21.60	50.75	74.00	-23.25	peak
6	17879.000	25.07	25.29	50.36	74.00	-23.64	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.3V

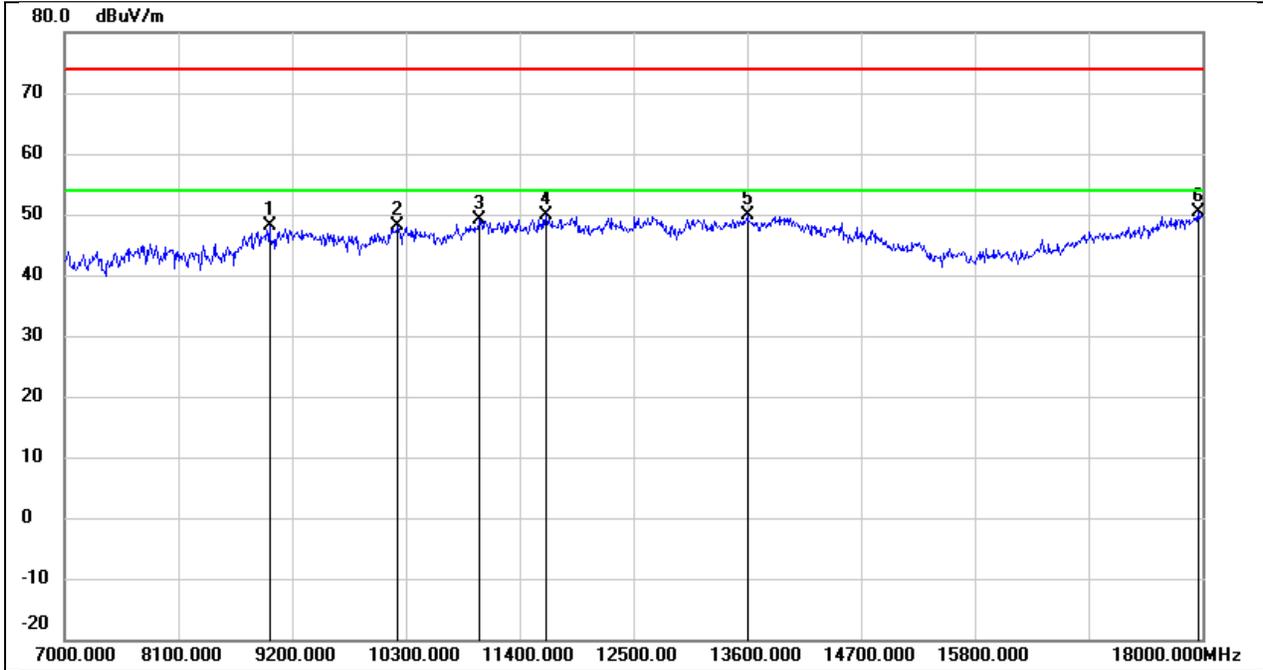


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.87	10.21	48.08	74.00	-25.92	peak
2	10223.000	35.82	12.24	48.06	74.00	-25.94	peak
3	11015.000	34.37	14.79	49.16	74.00	-24.84	peak
4	11653.000	32.74	17.05	49.79	74.00	-24.21	peak
5	13600.000	29.00	20.89	49.89	74.00	-24.11	peak
6	17956.000	24.48	25.82	50.30	74.00	-23.70	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 3.3V

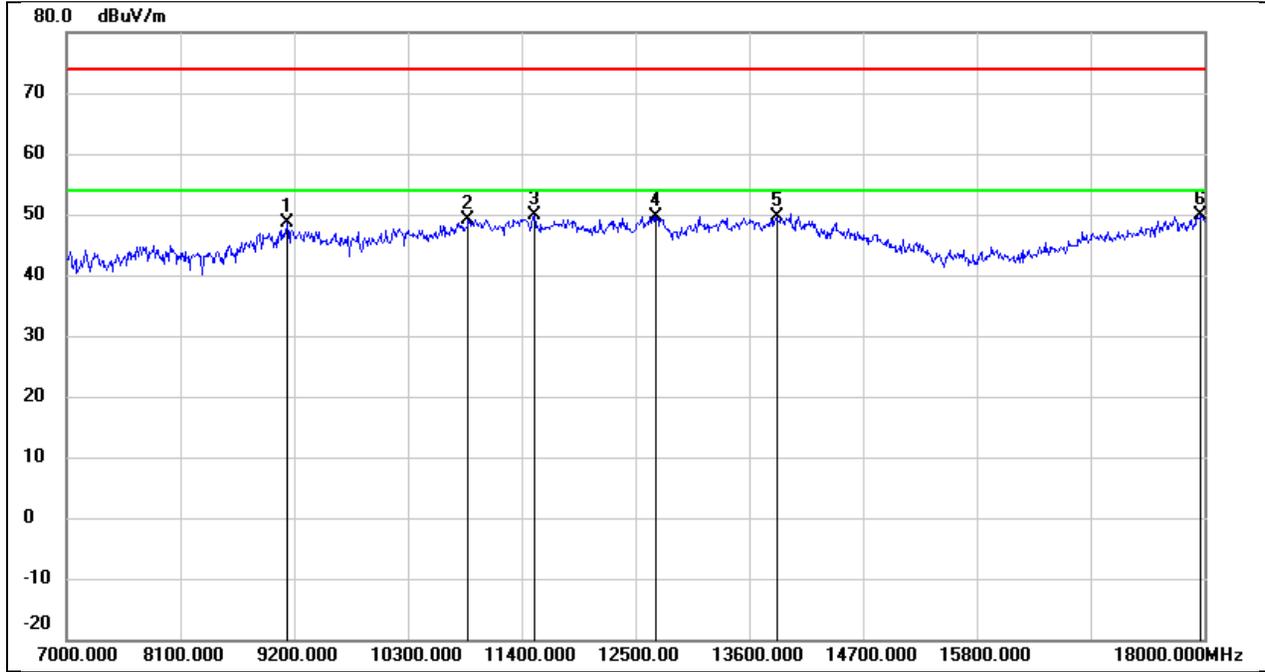


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	38.23	10.41	48.64	74.00	-25.36	peak
2	10883.000	34.96	14.27	49.23	74.00	-24.77	peak
3	11521.000	33.11	16.82	49.93	74.00	-24.07	peak
4	12698.000	31.64	18.08	49.72	74.00	-24.28	peak
5	13864.000	28.04	21.53	49.57	74.00	-24.43	peak
6	17967.000	23.99	25.89	49.88	74.00	-24.12	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3V

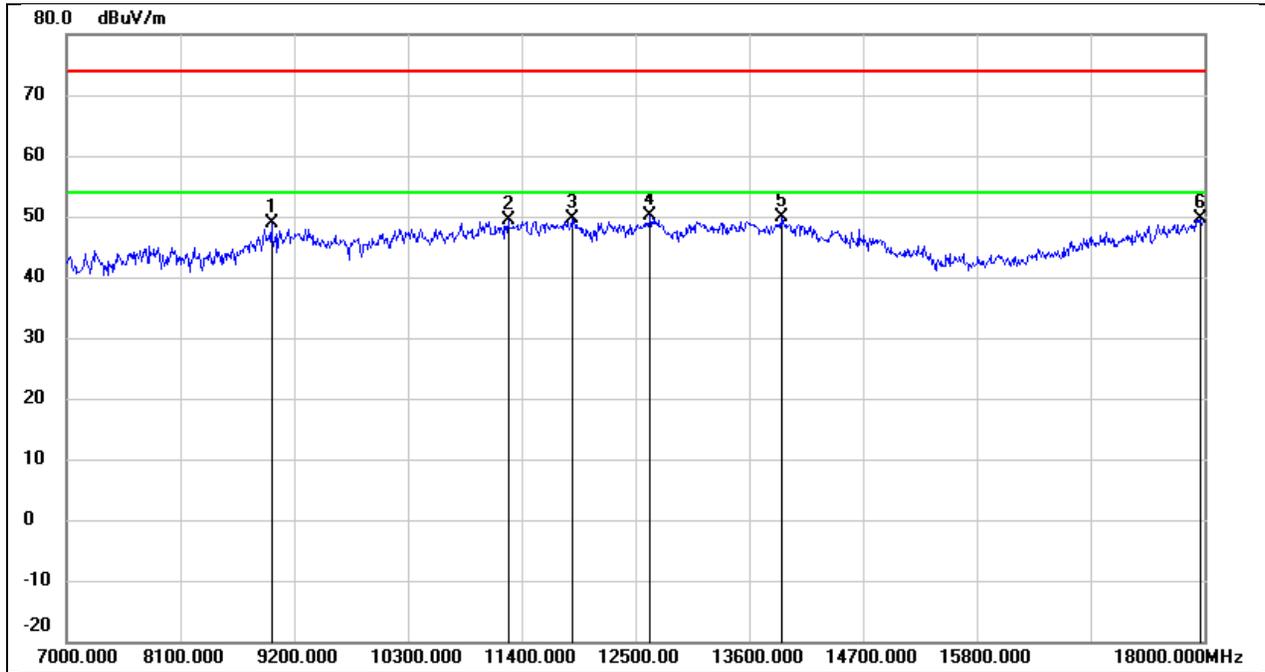


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	38.77	10.21	48.98	74.00	-25.02	peak
2	11268.000	33.49	15.83	49.32	74.00	-24.68	peak
3	11884.000	32.04	17.48	49.52	74.00	-24.48	peak
4	12643.000	32.05	18.01	50.06	74.00	-23.94	peak
5	13908.000	28.13	21.66	49.79	74.00	-24.21	peak
6	17956.000	23.91	25.82	49.73	74.00	-24.27	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 3.3V

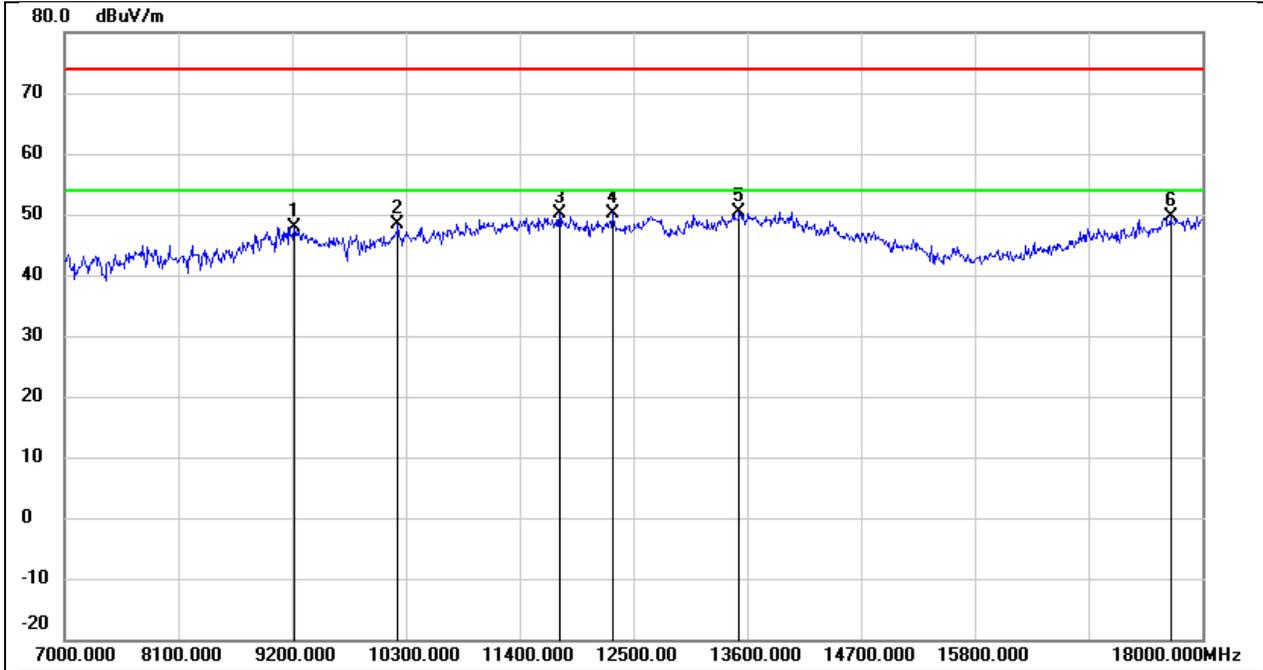


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	37.52	10.48	48.00	74.00	-26.00	peak
2	10223.000	36.08	12.24	48.32	74.00	-25.68	peak
3	11785.000	32.86	17.30	50.16	74.00	-23.84	peak
4	12302.000	32.25	17.78	50.03	74.00	-23.97	peak
5	13523.000	29.72	20.70	50.42	74.00	-23.58	peak
6	17692.000	25.73	24.01	49.74	74.00	-24.26	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3V

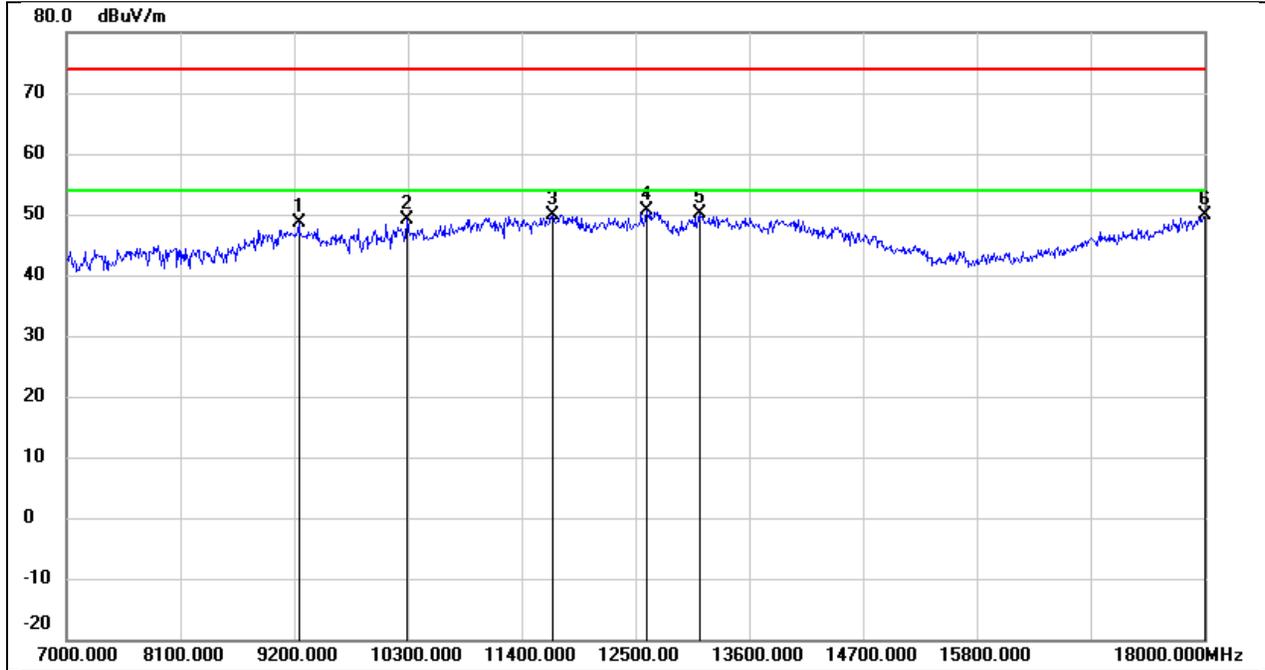


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	38.05	10.49	48.54	74.00	-25.46	peak
2	10289.000	36.75	12.38	49.13	74.00	-24.87	peak
3	11697.000	32.83	17.13	49.96	74.00	-24.04	peak
4	12610.000	32.63	17.97	50.60	74.00	-23.40	peak
5	13116.000	31.19	18.96	50.15	74.00	-23.85	peak
6	18000.000	23.80	26.12	49.92	74.00	-24.08	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 3.3V

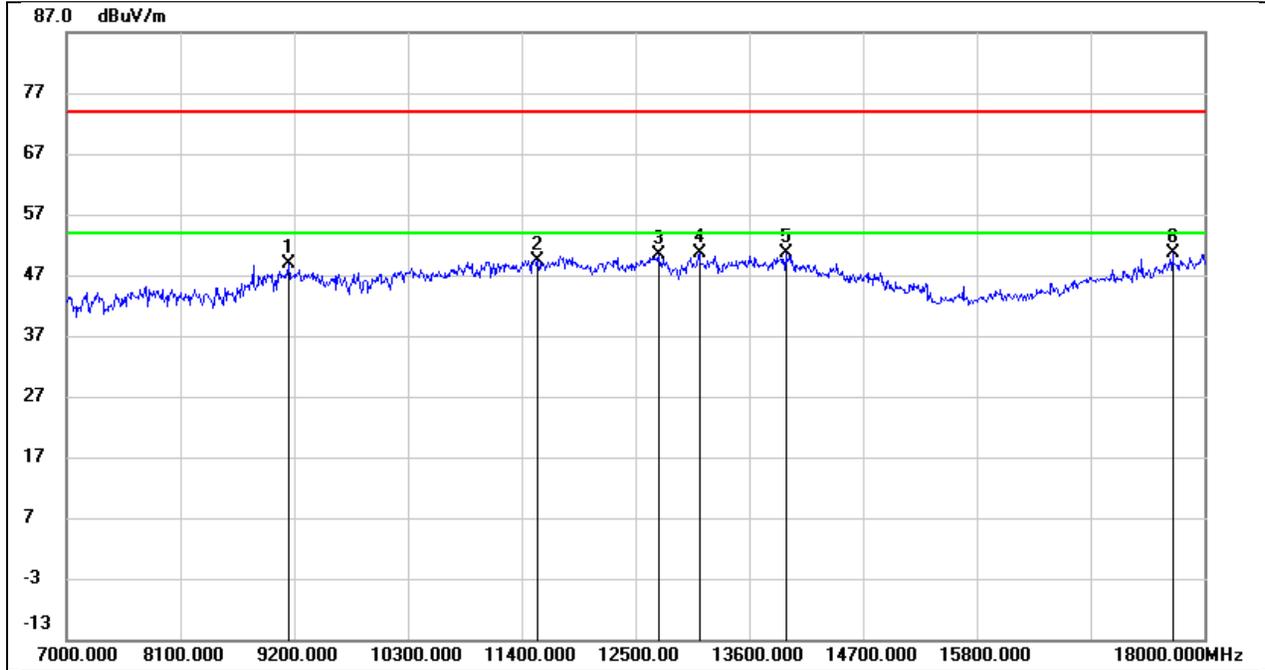


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	38.36	10.43	48.79	74.00	-25.21	peak
2	11554.000	32.61	16.87	49.48	74.00	-24.52	peak
3	12720.000	32.20	18.09	50.29	74.00	-23.71	peak
4	13116.000	31.67	18.96	50.63	74.00	-23.37	peak
5	13952.000	28.85	21.76	50.61	74.00	-23.39	peak
6	17692.000	26.55	24.01	50.56	74.00	-23.44	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3V

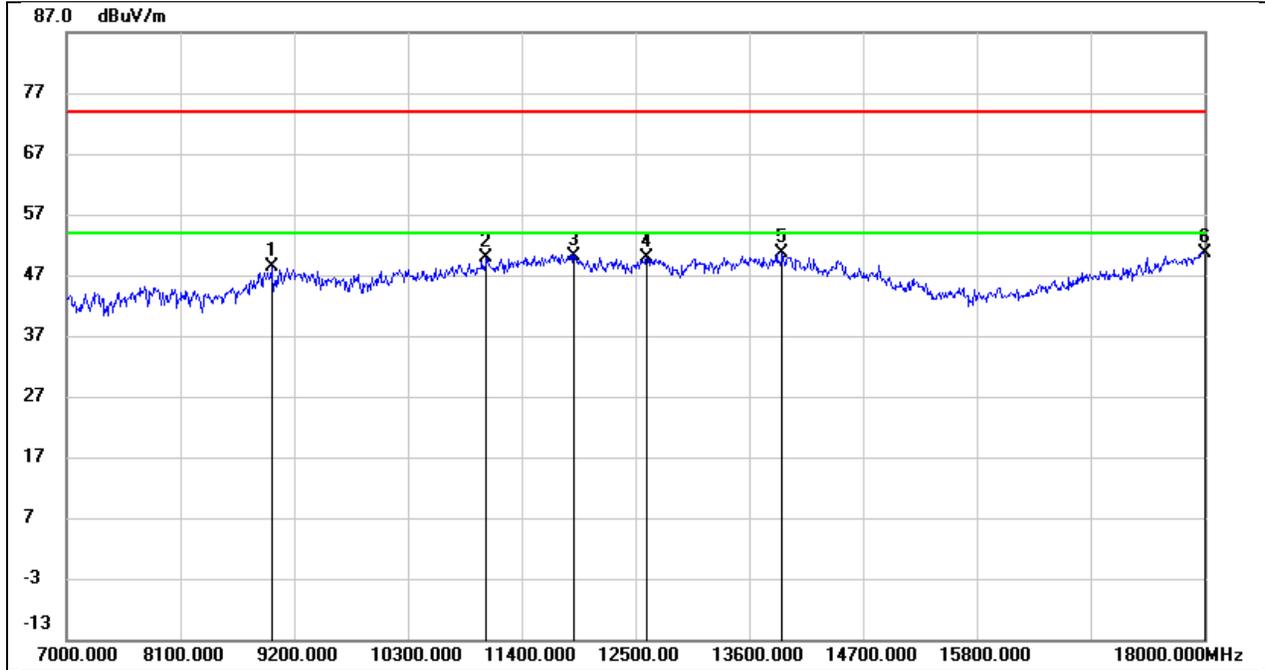


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	38.14	10.21	48.35	74.00	-25.65	peak
2	11059.000	34.80	14.96	49.76	74.00	-24.24	peak
3	11906.000	32.66	17.52	50.18	74.00	-23.82	peak
4	12610.000	31.84	17.97	49.81	74.00	-24.19	peak
5	13919.000	29.00	21.68	50.68	74.00	-23.32	peak
6	18000.000	24.56	26.12	50.68	74.00	-23.32	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 3.3V

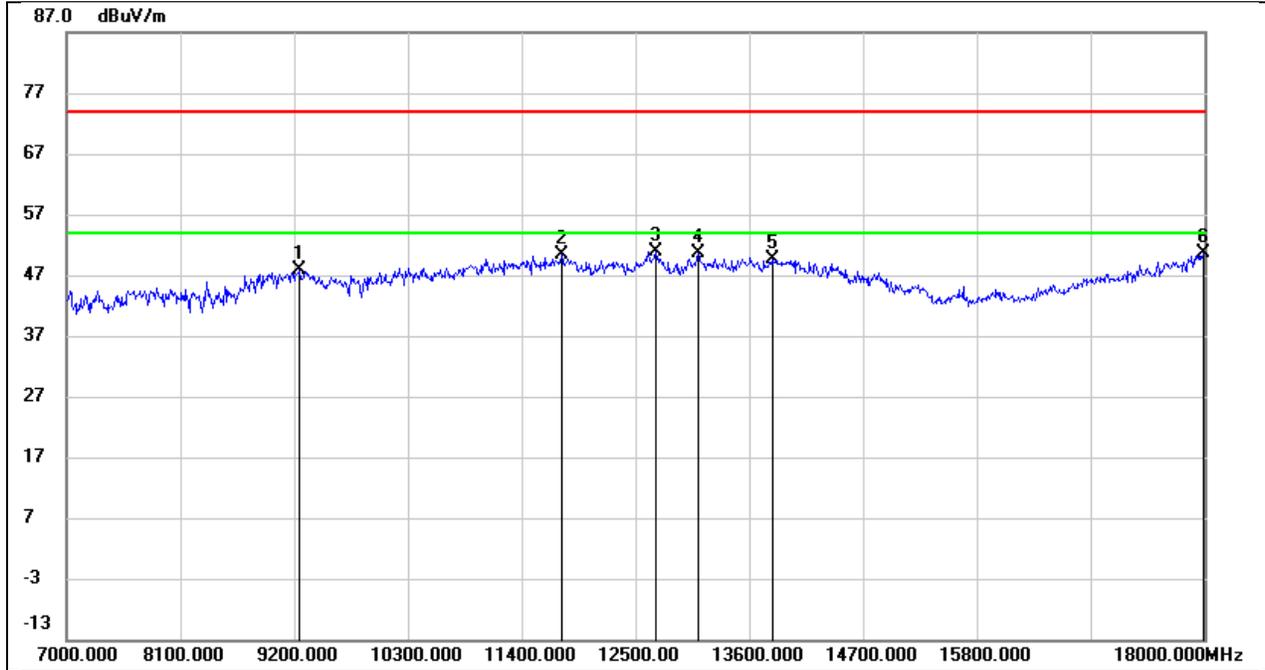


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.49	10.51	48.00	74.00	-26.00	peak
2	11785.000	33.14	17.30	50.44	74.00	-23.56	peak
3	12698.000	32.73	18.08	50.81	74.00	-23.19	peak
4	13105.000	31.64	18.91	50.55	74.00	-23.45	peak
5	13820.000	28.22	21.43	49.65	74.00	-24.35	peak
6	17989.000	24.64	26.04	50.68	74.00	-23.32	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3V

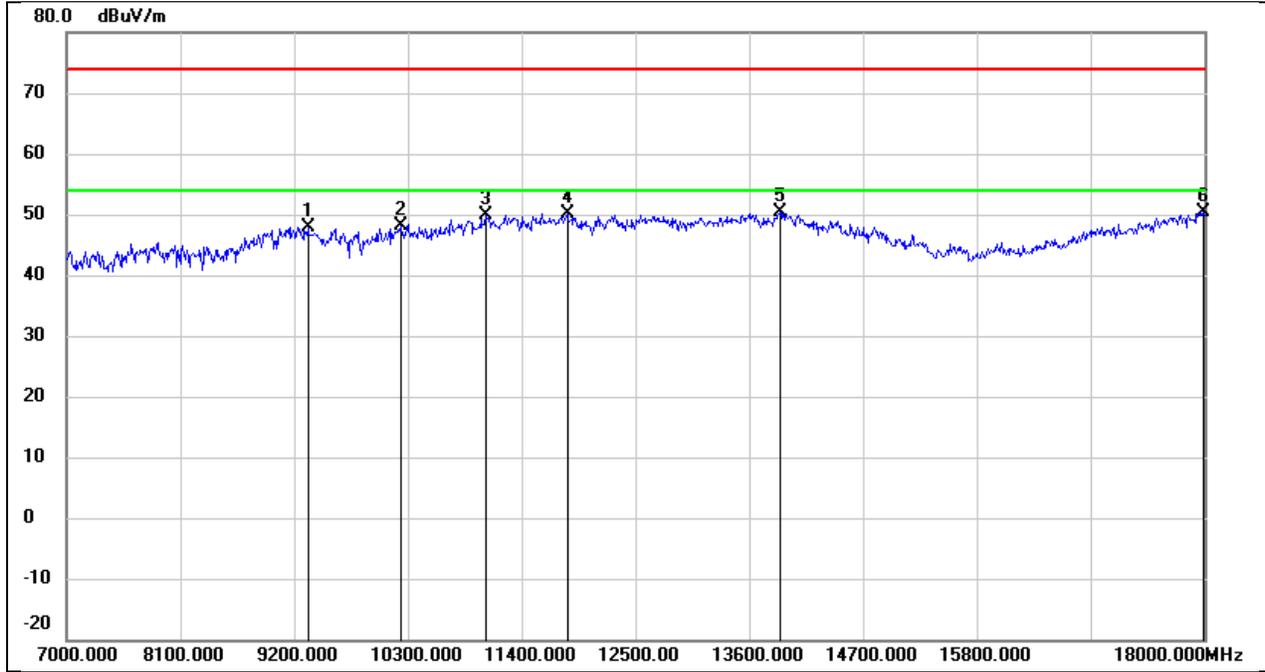


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.39	10.54	47.93	74.00	-26.07	peak
2	10234.000	35.91	12.26	48.17	74.00	-25.83	peak
3	11048.000	34.95	14.91	49.86	74.00	-24.14	peak
4	11840.000	32.76	17.40	50.16	74.00	-23.84	peak
5	13897.000	28.65	21.62	50.27	74.00	-23.73	peak
6	17989.000	24.27	26.04	50.31	74.00	-23.69	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 3.3V

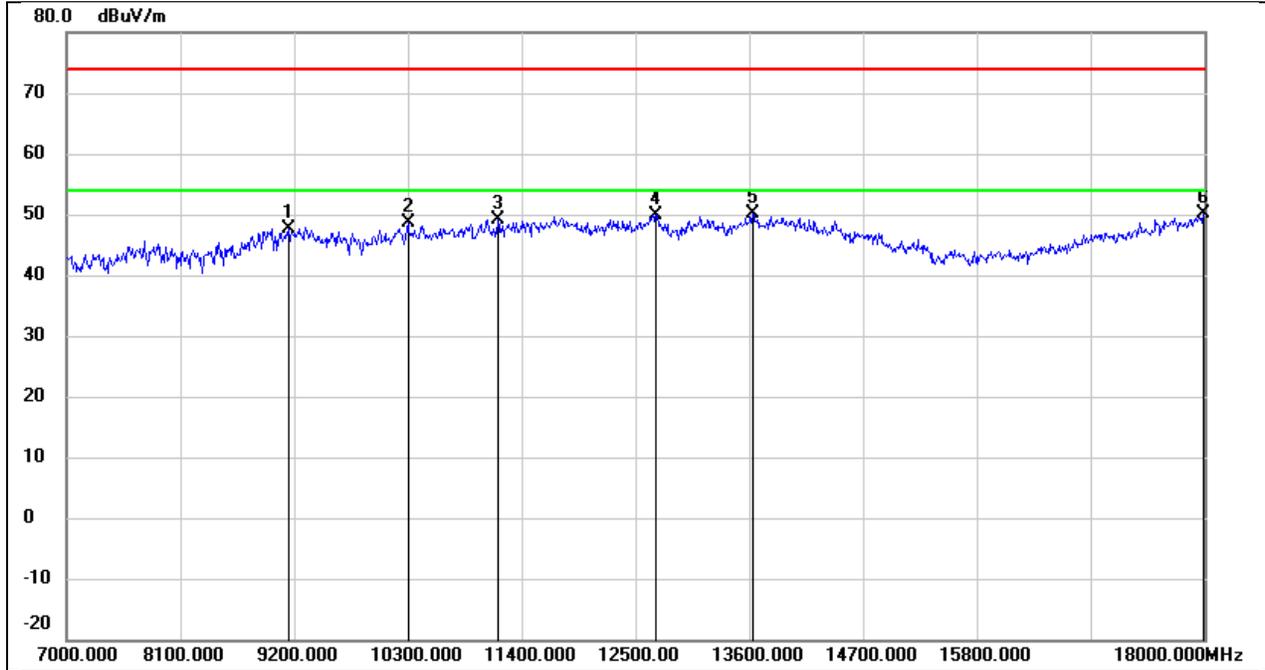


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	37.23	10.43	47.66	74.00	-26.34	peak
2	10300.000	36.23	12.40	48.63	74.00	-25.37	peak
3	11169.000	33.62	15.42	49.04	74.00	-24.96	peak
4	12698.000	31.86	18.08	49.94	74.00	-24.06	peak
5	13633.000	29.16	20.97	50.13	74.00	-23.87	peak
6	17989.000	24.09	26.04	50.13	74.00	-23.87	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 3.3V

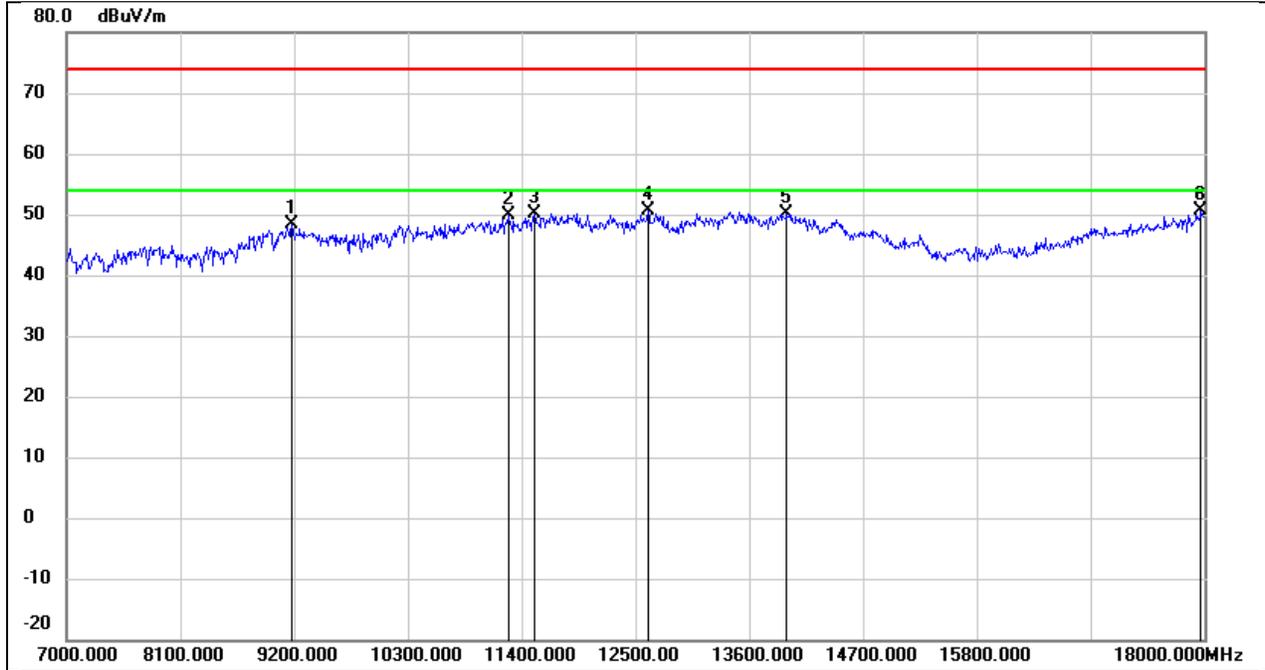


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	37.93	10.45	48.38	74.00	-25.62	peak
2	11268.000	34.17	15.83	50.00	74.00	-24.00	peak
3	11521.000	33.35	16.82	50.17	74.00	-23.83	peak
4	12621.000	32.61	17.98	50.59	74.00	-23.41	peak
5	13963.000	28.35	21.78	50.13	74.00	-23.87	peak
6	17967.000	24.82	25.89	50.71	74.00	-23.29	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 3.3V

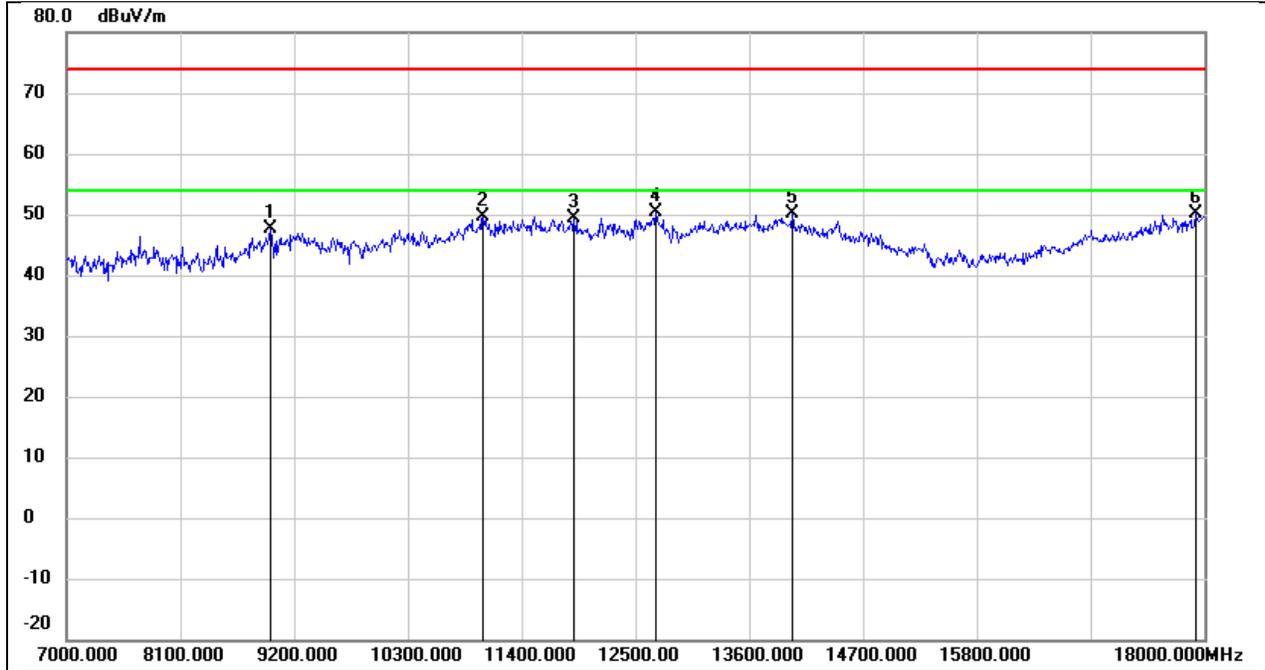


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8969.000	37.38	10.13	47.51	74.00	-26.49	peak
2	11026.000	34.89	14.82	49.71	74.00	-24.29	peak
3	11906.000	31.97	17.52	49.49	74.00	-24.51	peak
4	12698.000	32.25	18.08	50.33	74.00	-23.67	peak
5	14018.000	28.33	21.80	50.13	74.00	-23.87	peak
6	17912.000	24.67	25.52	50.19	74.00	-23.81	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3V

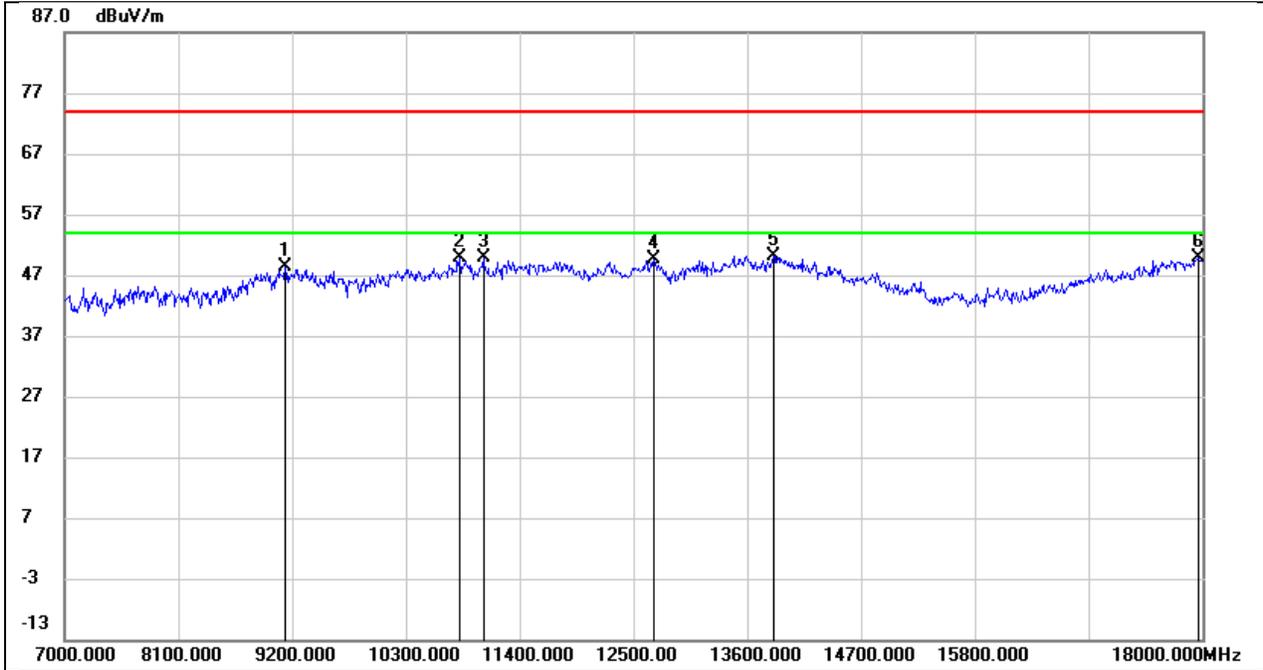

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.93	10.41	48.34	74.00	-25.66	peak
2	10817.000	35.90	14.03	49.93	74.00	-24.07	peak
3	11048.000	34.87	14.91	49.78	74.00	-24.22	peak
4	12698.000	31.59	18.08	49.67	74.00	-24.33	peak
5	13853.000	28.65	21.52	50.17	74.00	-23.83	peak
6	17967.000	24.06	25.89	49.95	74.00	-24.05	peak


Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 3.3V

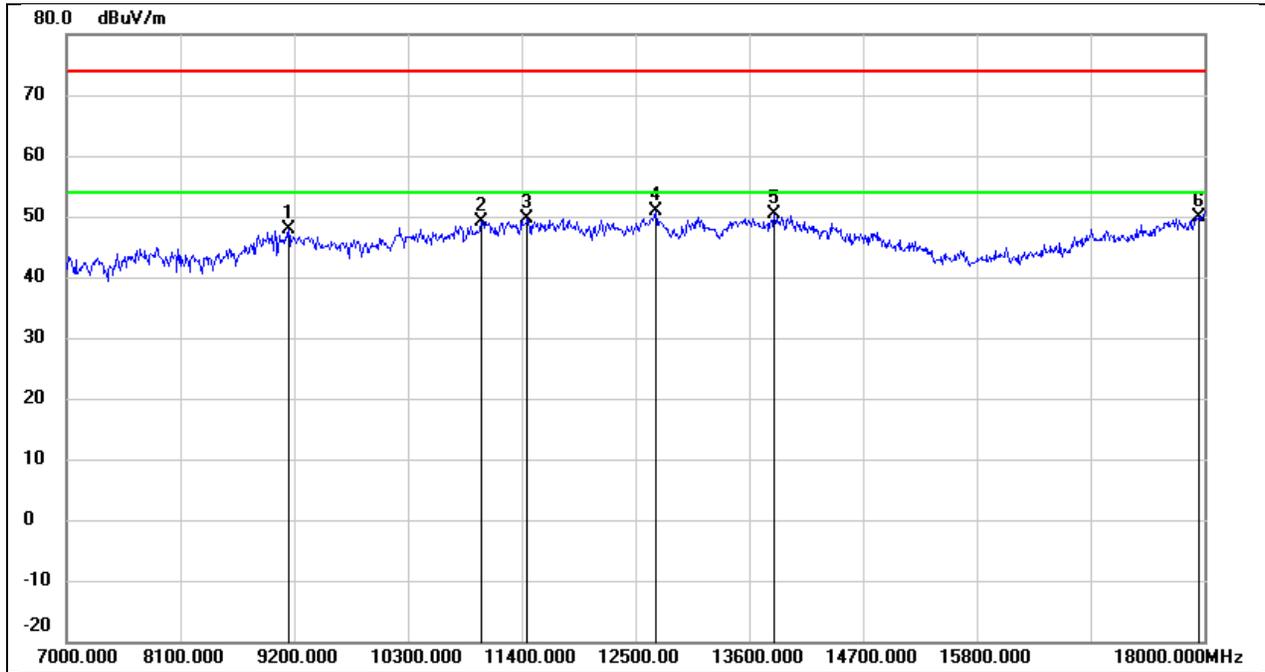

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	37.37	10.43	47.80	74.00	-26.20	peak
2	11004.000	34.51	14.74	49.25	74.00	-24.75	peak
3	11455.000	33.02	16.58	49.60	74.00	-24.40	peak
4	12698.000	32.76	18.08	50.84	74.00	-23.16	peak
5	13842.000	28.87	21.49	50.36	74.00	-23.64	peak
6	17945.000	24.24	25.75	49.99	74.00	-24.01	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

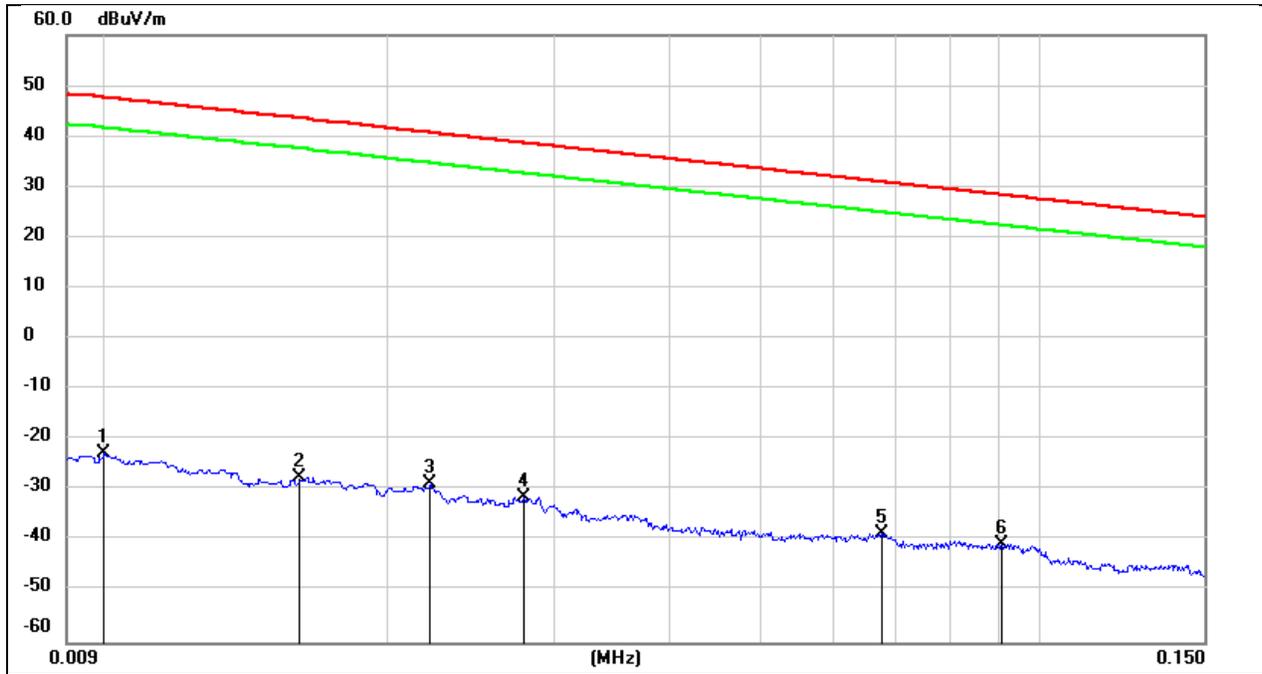


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	78.72	-101.40	-22.68	47.60	-74.18	-3.90	-70.28	peak
2	0.0160	73.97	-101.37	-27.40	43.52	-78.90	-7.98	-70.92	peak
3	0.0221	72.63	-101.35	-28.72	40.71	-80.22	-10.79	-69.43	peak
4	0.0279	70.17	-101.38	-31.21	38.69	-82.71	-12.81	-69.90	peak
5	0.0675	63.14	-101.56	-38.42	31.02	-89.92	-20.48	-69.44	peak
6	0.0911	61.11	-101.72	-40.61	28.41	-92.11	-23.09	-69.02	peak

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

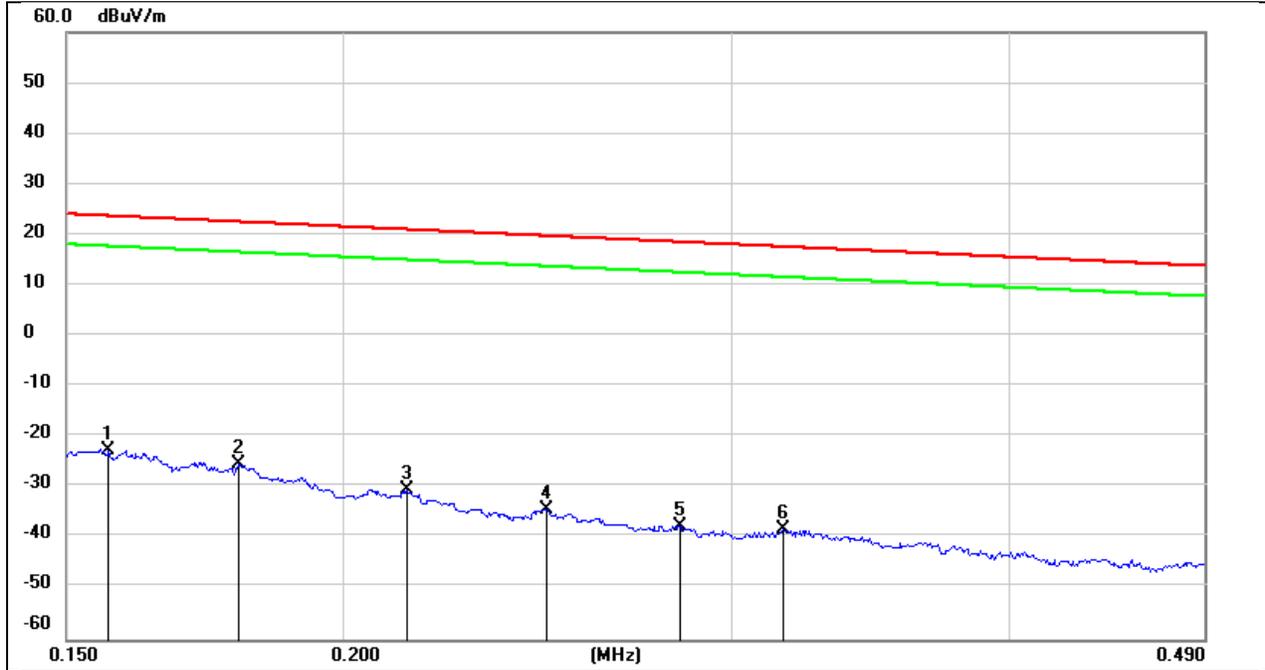

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1567	78.95	-101.65	-22.70	23.70	-74.20	-27.80	-46.40	peak
2	0.1794	76.27	-101.68	-25.41	22.53	-76.91	-28.97	-47.94	peak
3	0.2139	71.18	-101.74	-30.56	21.00	-82.06	-30.50	-51.56	peak
4	0.2472	67.45	-101.80	-34.35	19.74	-85.85	-31.76	-54.09	peak
5	0.2837	64.22	-101.83	-37.61	18.54	-89.11	-32.96	-56.15	peak
6	0.3163	63.70	-101.87	-38.17	17.60	-89.67	-33.90	-55.77	peak


Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

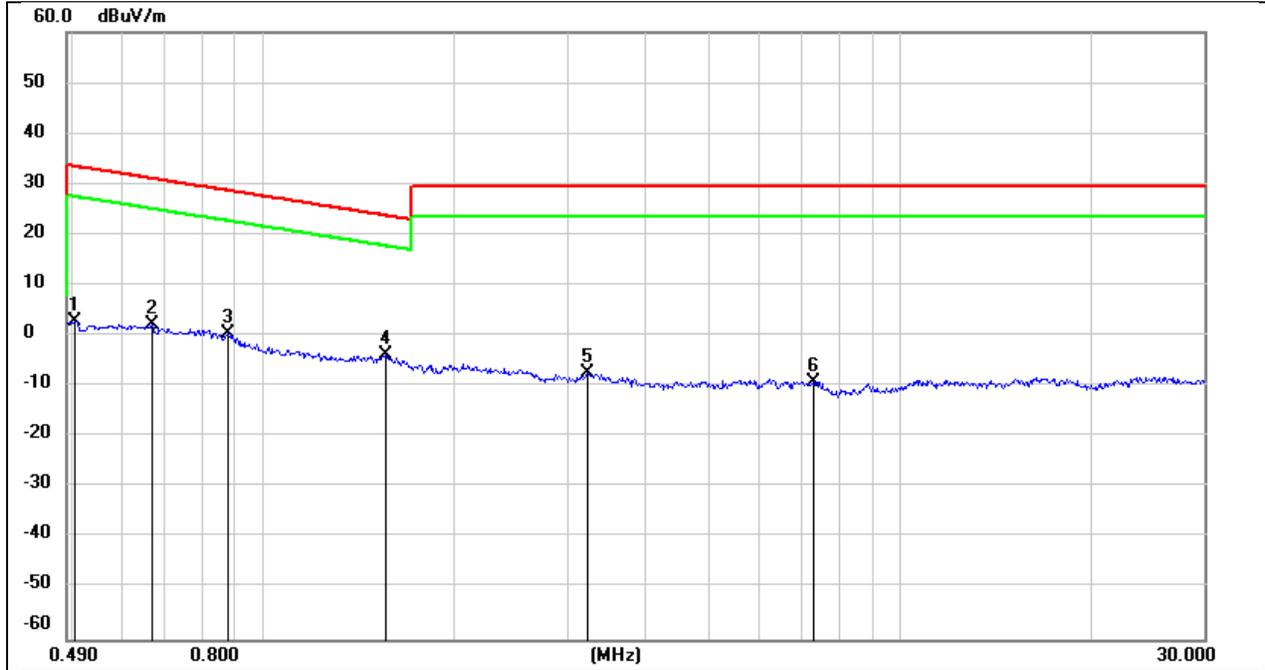

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5039	64.93	-62.07	2.86	33.56	-48.64	-17.94	-30.70	peak
2	0.6671	64.25	-62.10	2.15	31.12	-49.35	-20.38	-28.97	peak
3	0.8789	62.56	-62.19	0.37	28.73	-51.13	-22.77	-28.36	peak
4	1.5564	58.18	-62.02	-3.84	23.76	-55.34	-27.74	-27.60	peak
5	3.2343	54.29	-61.53	-7.24	29.54	-58.74	-21.96	-36.78	peak
6	7.3361	52.08	-61.17	-9.09	29.54	-60.59	-21.96	-38.63	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

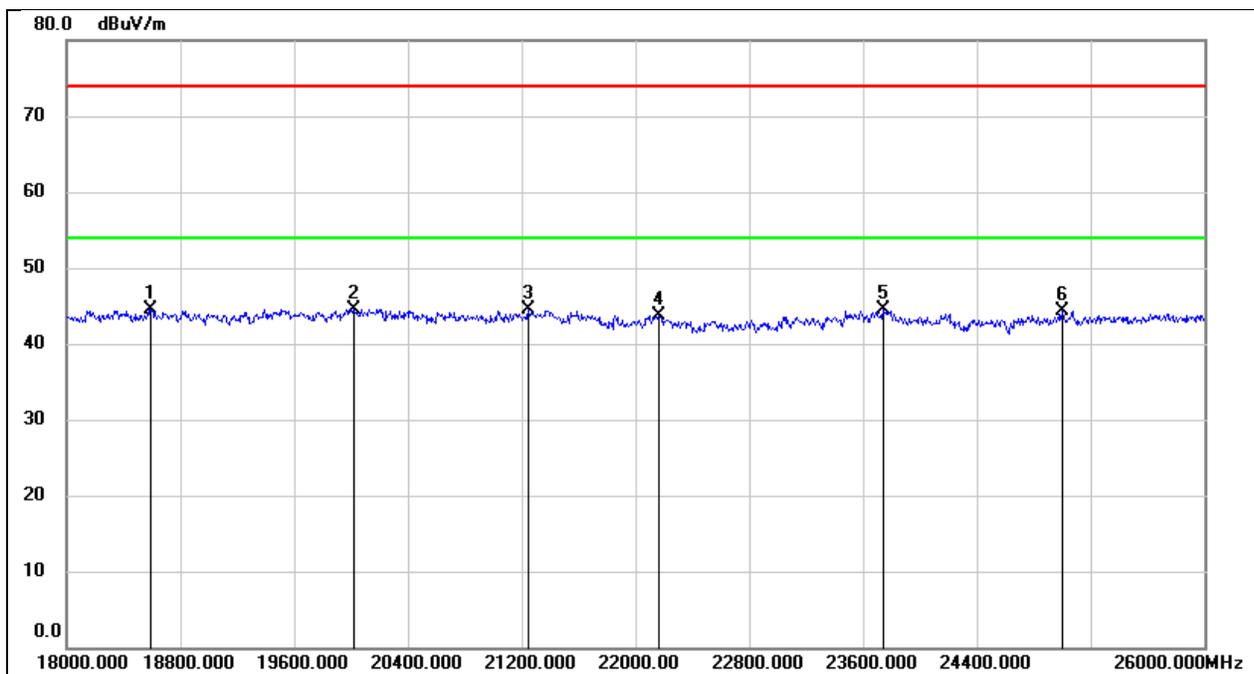

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18592.000	49.75	-5.31	44.44	74.00	-29.56	peak
2	20016.000	50.06	-5.47	44.59	74.00	-29.41	peak
3	21248.000	49.29	-4.77	44.52	74.00	-29.48	peak
4	22160.000	48.08	-4.31	43.77	74.00	-30.23	peak
5	23744.000	47.65	-3.20	44.45	74.00	-29.55	peak
6	25000.000	46.36	-2.10	44.26	74.00	-29.74	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

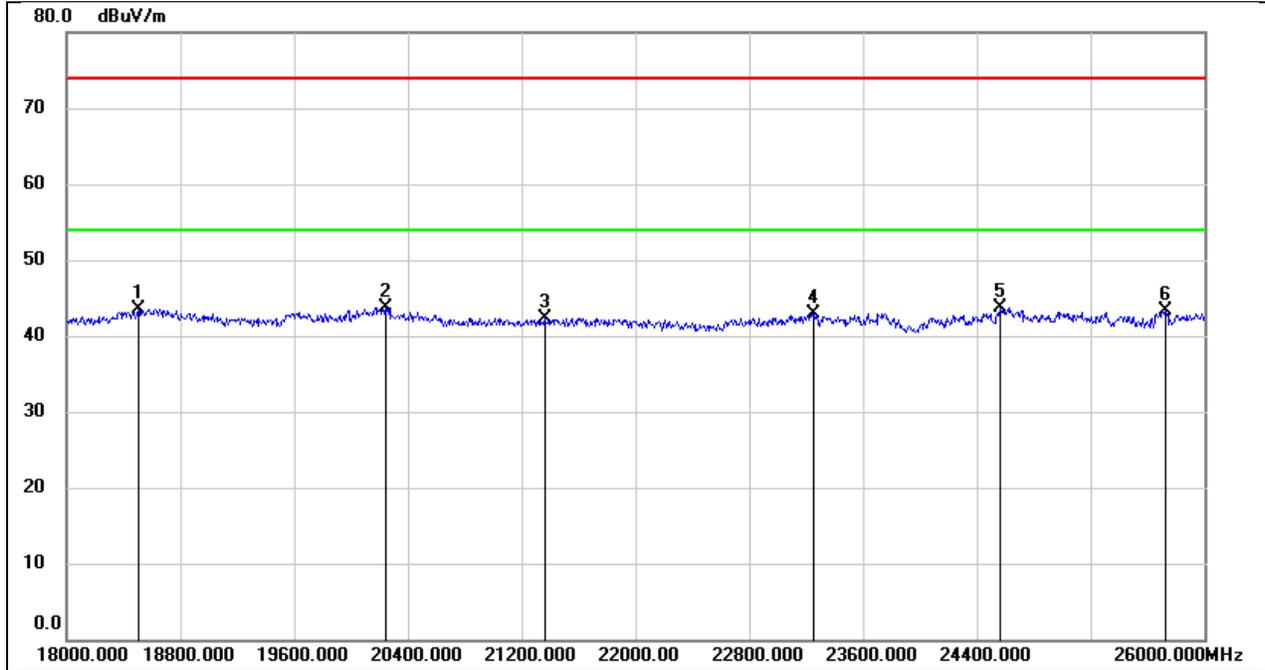

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18504.000	48.77	-5.25	43.52	74.00	-30.48	peak
2	20240.000	49.32	-5.61	43.71	74.00	-30.29	peak
3	21360.000	47.02	-4.73	42.29	74.00	-31.71	peak
4	23256.000	46.30	-3.35	42.95	74.00	-31.05	peak
5	24568.000	46.10	-2.33	43.77	74.00	-30.23	peak
6	25728.000	44.11	-0.72	43.39	74.00	-30.61	peak


8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

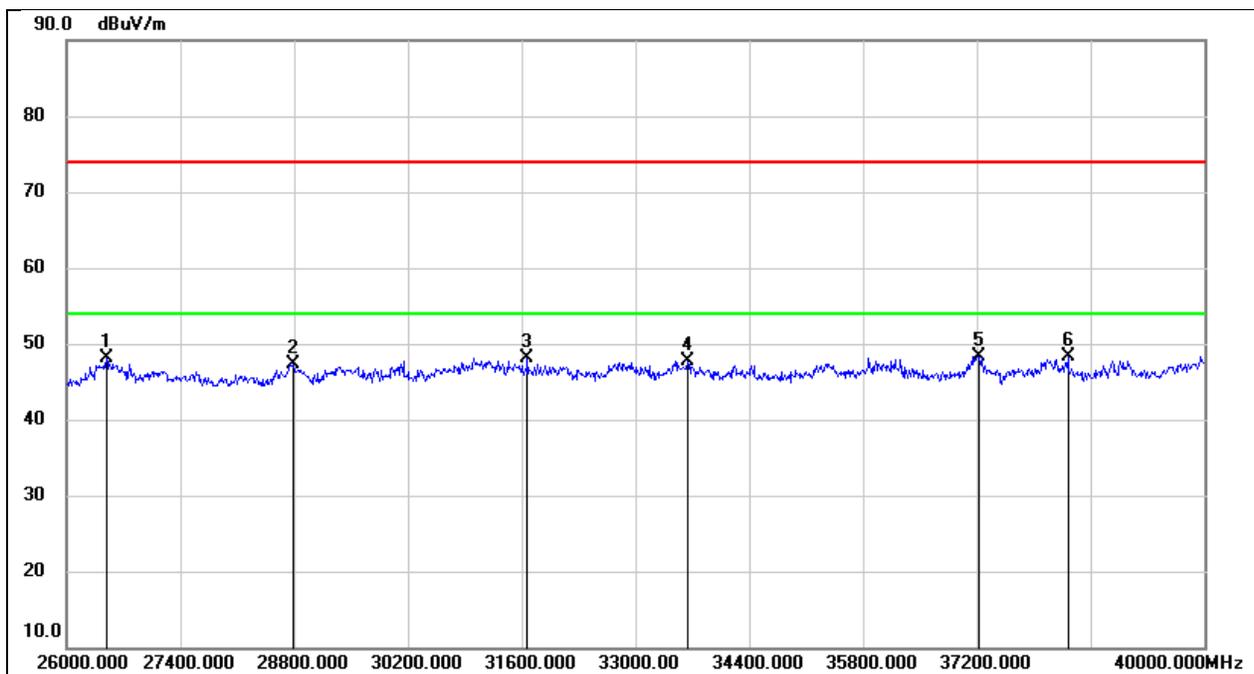

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26490.000	52.79	-4.74	48.05	74.00	-25.95	peak
2	28786.000	47.99	-0.64	47.35	74.00	-26.65	peak
3	31670.000	49.36	-1.21	48.15	74.00	-25.85	peak
4	33644.000	47.31	0.42	47.73	74.00	-26.27	peak
5	37228.000	45.23	3.14	48.37	74.00	-25.63	peak
6	38320.000	44.56	3.77	48.33	74.00	-25.67	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

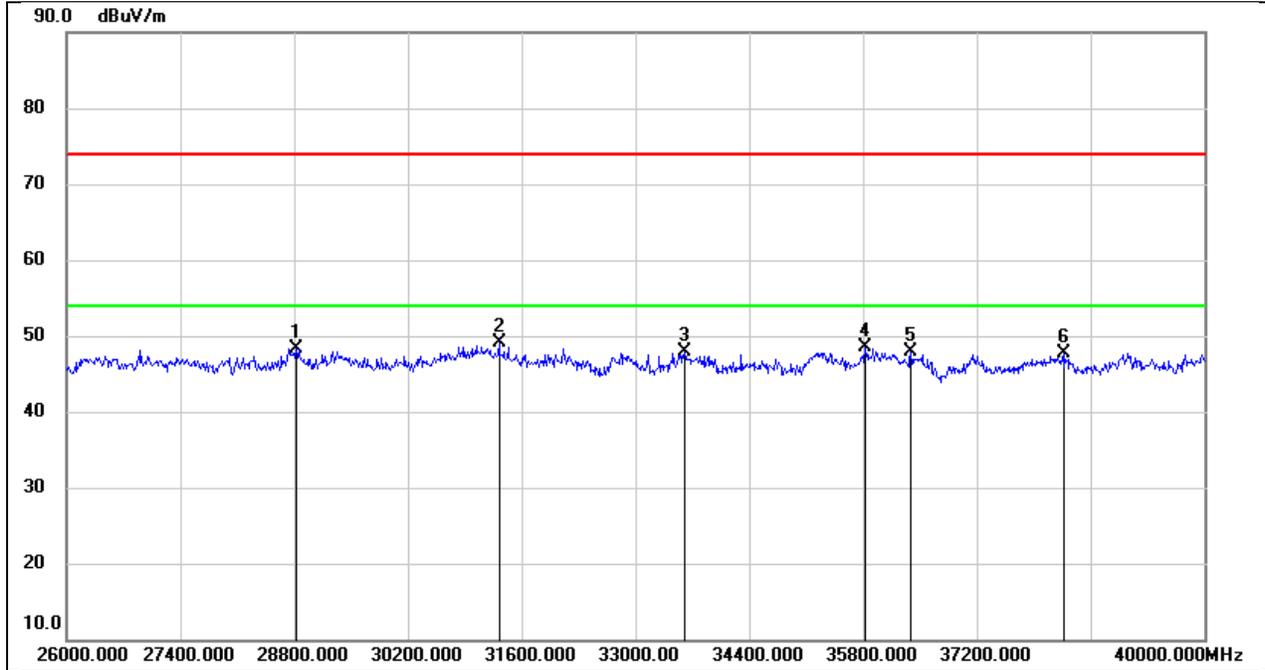

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	28828.000	49.13	-0.79	48.34	74.00	-25.66	peak
2	31320.000	50.11	-0.93	49.18	74.00	-24.82	peak
3	33602.000	47.51	0.46	47.97	74.00	-26.03	peak
4	35828.000	44.75	3.67	48.42	74.00	-25.58	peak
5	36388.000	44.32	3.52	47.84	74.00	-26.16	peak
6	38278.000	43.82	3.82	47.64	74.00	-26.36	peak


8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

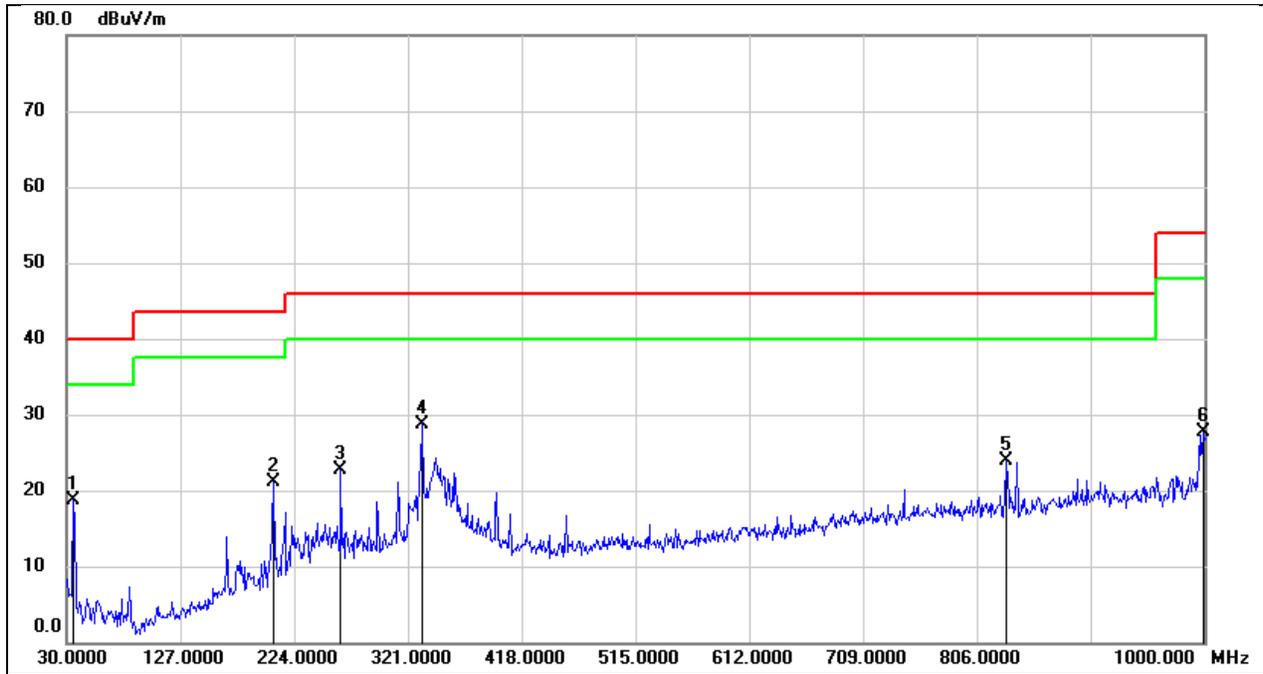

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.8200	37.35	-18.70	18.65	40.00	-21.35	QP
2	206.5399	37.23	-16.14	21.09	43.50	-22.41	QP
3	263.7700	40.05	-17.39	22.66	46.00	-23.34	QP
4	333.6099	42.05	-13.25	28.80	46.00	-17.20	QP
5	831.2199	29.96	-6.10	23.86	46.00	-22.14	QP
6	999.0300	31.41	-3.67	27.74	54.00	-26.26	QP

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

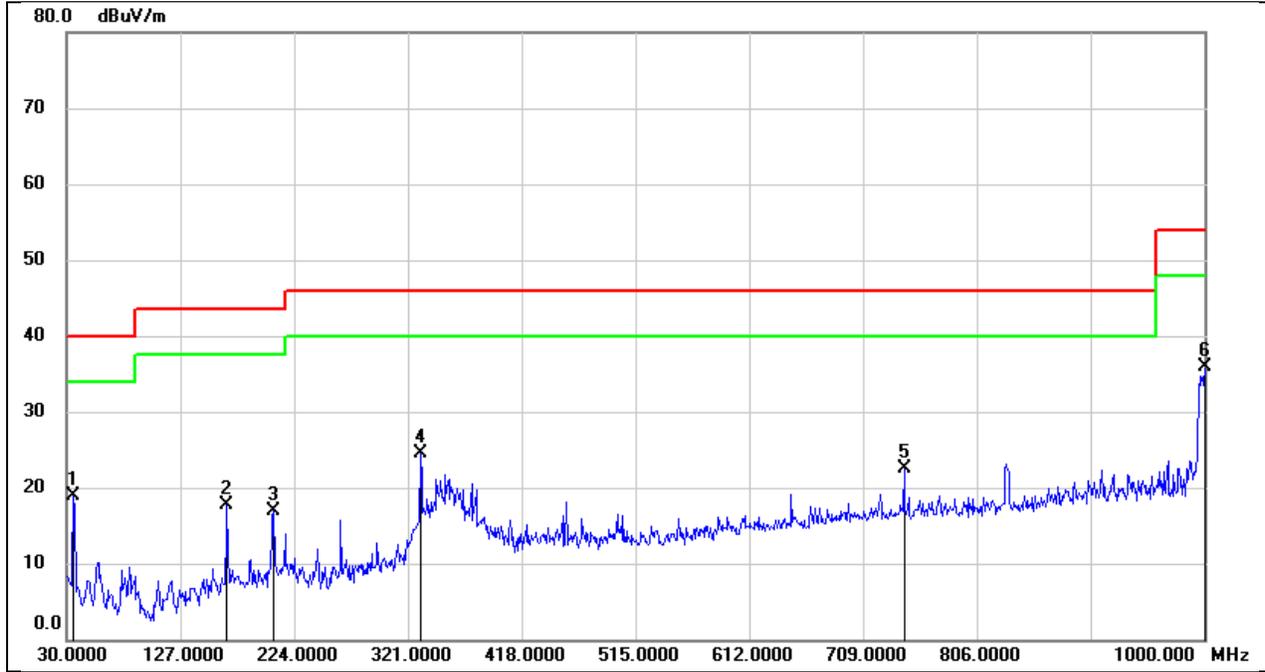

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.8200	37.52	-18.70	18.82	40.00	-21.18	QP
2	166.7700	34.34	-16.55	17.79	43.50	-25.71	QP
3	206.5399	33.12	-16.14	16.98	43.50	-26.52	QP
4	331.6700	37.77	-13.34	24.43	46.00	-21.57	QP
5	743.9200	29.25	-6.82	22.43	46.00	-23.57	QP
6	1000.0000	39.65	-3.66	35.99	54.00	-18.01	QP

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

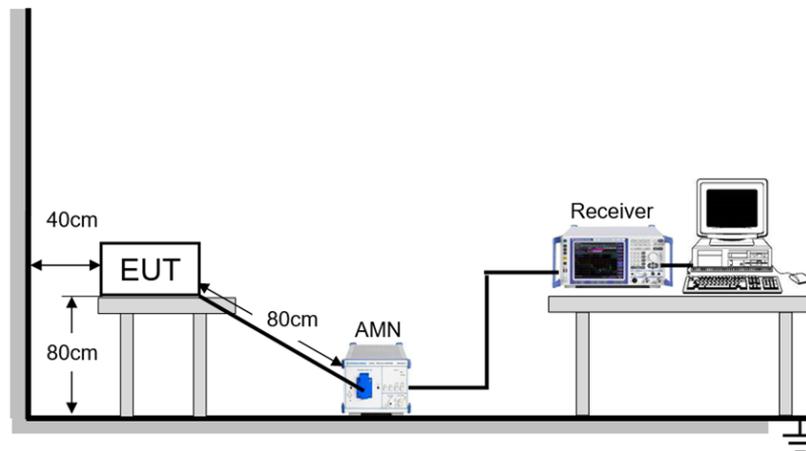

TEST ENVIRONMENT


Temperature	22.9°C	Relative Humidity	47.1%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	December 22, 2023	Test By	Fanny Huang
-----------	-------------------	---------	-------------

TEST RESULTS

Test Mode:	802.11a20	Frequency(MHz):	5180
Line:	Line		

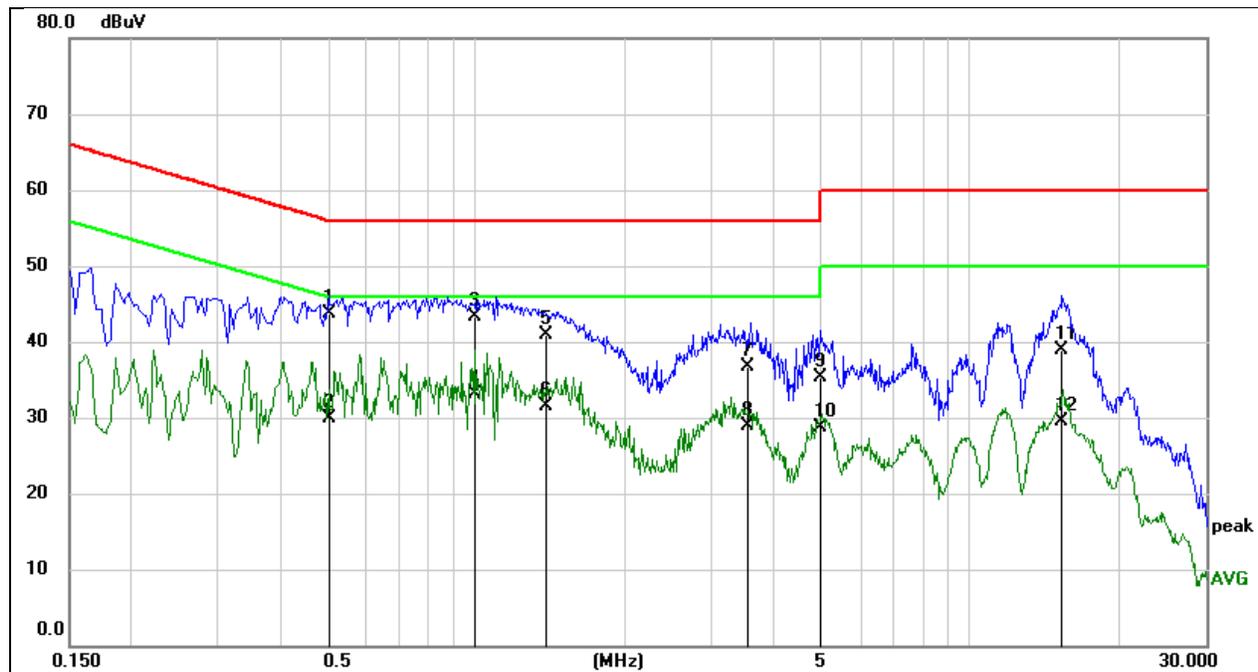


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.5069	34.12	9.50	43.62	56.00	-12.38	QP
2	0.5069	20.43	9.50	29.93	46.00	-16.07	AVG
3	0.9955	33.75	9.51	43.26	56.00	-12.74	QP
4	0.9955	23.55	9.51	33.06	46.00	-12.94	AVG
5	1.3878	31.35	9.55	40.90	56.00	-15.10	QP
6	1.3878	21.98	9.55	31.53	46.00	-14.47	AVG
7	3.5180	27.11	9.61	36.72	56.00	-19.28	QP
8	3.5180	19.31	9.61	28.92	46.00	-17.08	AVG
9	4.9861	25.65	9.62	35.27	56.00	-20.73	QP
10	4.9861	19.03	9.62	28.65	46.00	-17.35	AVG
11	15.2877	29.22	9.65	38.87	60.00	-21.13	QP
12	15.2877	19.93	9.65	29.58	50.00	-20.42	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11a20	Frequency(MHz):	5180
Line:	Neutral		

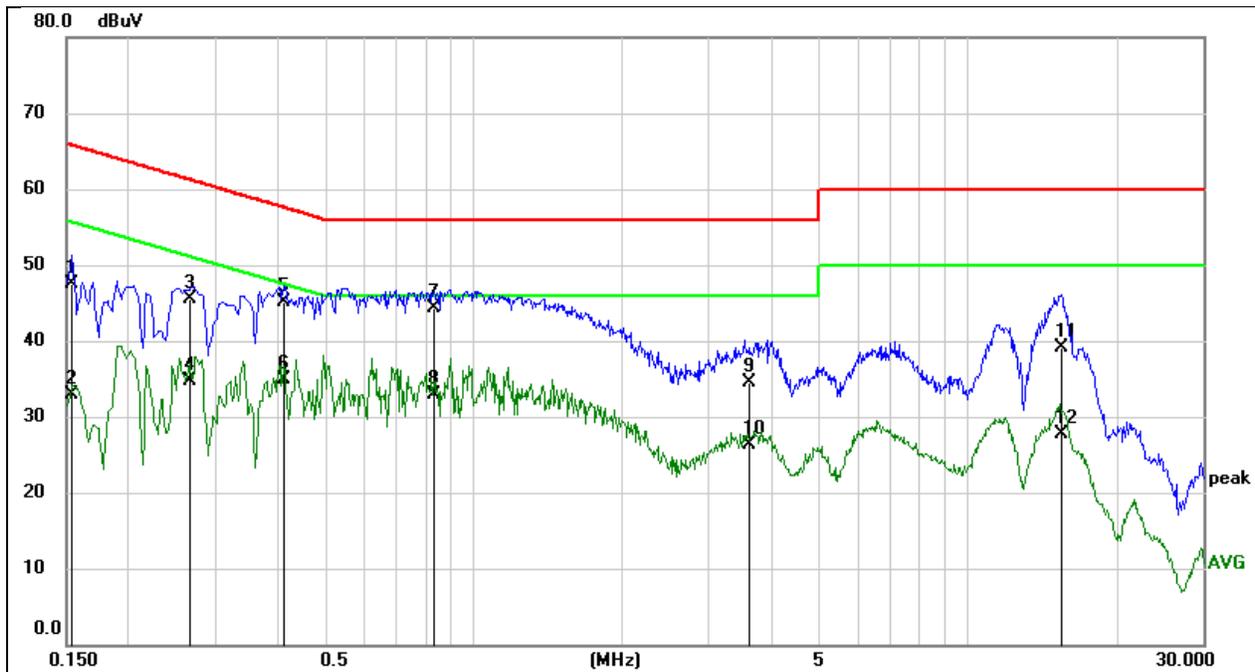

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1539	38.05	9.50	47.55	65.79	-18.24	QP
2	0.1539	23.46	9.50	32.96	55.79	-22.83	AVG
3	0.2665	35.87	9.57	45.44	61.23	-15.79	QP
4	0.2665	25.22	9.57	34.79	51.23	-16.44	AVG
5	0.4138	35.51	9.53	45.04	57.57	-12.53	QP
6	0.4138	25.28	9.53	34.81	47.57	-12.76	AVG
7	0.8354	34.71	9.50	44.21	56.00	-11.79	QP
8	0.8354	23.48	9.50	32.98	46.00	-13.02	AVG
9	3.5986	24.98	9.61	34.59	56.00	-21.41	QP
10	3.5986	16.73	9.61	26.34	46.00	-19.66	AVG
11	15.5520	29.47	9.65	39.12	60.00	-20.88	QP
12	15.5520	18.15	9.65	27.80	50.00	-22.20	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA


11.1. APPENDIX A: EMISSION BANDWIDTH


11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Verdict	
11A	Ant1	5180	19.76	5170.08	5189.84	PASS	
	Ant2	5180	19.96	5170.04	5190.00	PASS	
	Ant1	5200	23.64	5187.68	5211.32	PASS	
	Ant2	5200	20.04	5190.00	5210.04	PASS	
	Ant1	5240	20.76	5229.60	5250.36	PASS	
	Ant2	5240	19.84	5230.08	5249.92	PASS	
	Ant1	5260	20.12	5249.88	5270.00	PASS	
	Ant2	5260	19.72	5250.08	5269.80	PASS	
	Ant1	5280	20.44	5269.60	5290.04	PASS	
	Ant2	5280	20.08	5269.88	5289.96	PASS	
	Ant1	5320	19.92	5310.04	5329.96	PASS	
	Ant2	5320	19.52	5310.28	5329.80	PASS	
	Ant1	5500	19.92	5489.96	5509.88	PASS	
	Ant2	5500	19.92	5489.92	5509.84	PASS	
	Ant1	5580	19.96	5569.92	5589.88	PASS	
	Ant2	5580	20.08	5569.88	5589.96	PASS	
	Ant1	5700	20.12	5689.92	5710.04	PASS	
	Ant2	5700	20.04	5690.00	5710.04	PASS	
	Ant1	5720	20.00	5710.00	5730.00	PASS	
	Ant2	5720	20.20	5709.80	5730.00	PASS	
	Ant1	5720_UNII-2C	15	5710.00	5725	PASS	
	Ant2	5720_UNII-2C	15.2	5709.80	5725	PASS	
	Ant1	5720_UNII-3	5	5725	5730.00	PASS	
	Ant2	5720_UNII-3	5	5725	5730.00	PASS	
	Ant1	5745	20.04	5735.08	5755.12	PASS	
	Ant2	5745	19.96	5735.00	5754.96	PASS	
	Ant1	5785	20.00	5775.04	5795.04	PASS	
	Ant2	5785	19.68	5775.20	5794.88	PASS	
	Ant1	5825	20.28	5814.64	5834.92	PASS	
	Ant2	5825	20.12	5814.88	5835.00	PASS	
	11N20MIMO	Ant1	5180	20.00	5169.92	5189.92	PASS
		Ant2	5180	20.32	5169.80	5190.12	PASS
Ant1		5200	20.16	5189.76	5209.92	PASS	
Ant2		5200	20.04	5189.92	5209.96	PASS	
Ant1		5240	19.96	5230.00	5249.96	PASS	
Ant2		5240	19.92	5230.00	5249.92	PASS	
Ant1		5260	19.96	5250.00	5269.96	PASS	
Ant2		5260	20.04	5250.00	5270.04	PASS	
Ant1		5280	20.32	5269.84	5290.16	PASS	
Ant2		5280	20.16	5269.88	5290.04	PASS	
Ant1		5320	20.04	5309.88	5329.92	PASS	
Ant2		5320	20.32	5309.88	5330.20	PASS	
Ant1		5500	20.00	5490.00	5510.00	PASS	
Ant2		5500	20.24	5489.88	5510.12	PASS	
Ant1		5580	20.44	5569.68	5590.12	PASS	
Ant2		5580	20.28	5569.84	5590.12	PASS	
Ant1		5700	19.92	5689.96	5709.88	PASS	
Ant2		5700	20.24	5689.84	5710.08	PASS	
Ant1		5720	20.08	5709.96	5730.04	PASS	
Ant2		5720	20.24	5709.84	5730.08	PASS	
Ant1		5720_UNII-2C	15.04	5709.96	5725	PASS	
Ant2		5720_UNII-2C	15.16	5709.84	5725	PASS	
Ant1		5720_UNII-3	5.04	5725	5730.04	PASS	
Ant2		5720_UNII-3	5.08	5725	5730.08	PASS	
Ant1		5745	20.52	5734.72	5755.24	PASS	
Ant2		5745	20.28	5734.88	5755.16	PASS	


	Ant1	5785	20.32	5774.84	5795.16	PASS
	Ant2	5785	20.00	5774.88	5794.88	PASS
	Ant1	5825	20.32	5814.84	5835.16	PASS
	Ant2	5825	20.24	5814.84	5835.08	PASS
11N40MIMO	Ant1	5190	41.20	5169.44	5210.64	PASS
	Ant2	5190	40.48	5169.76	5210.24	PASS
	Ant1	5230	50.16	5204.64	5254.80	PASS
	Ant2	5230	40.56	5209.76	5250.32	PASS
	Ant1	5270	41.60	5249.36	5290.96	PASS
	Ant2	5270	40.32	5249.92	5290.24	PASS
	Ant1	5310	40.96	5289.52	5330.48	PASS
	Ant2	5310	40.08	5290.00	5330.08	PASS
	Ant1	5510	41.12	5489.52	5530.64	PASS
	Ant2	5510	40.96	5489.52	5530.48	PASS
	Ant1	5550	41.36	5529.20	5570.56	PASS
	Ant2	5550	40.72	5529.68	5570.40	PASS
	Ant1	5670	41.52	5649.44	5690.96	PASS
	Ant2	5670	40.64	5649.68	5690.32	PASS
	Ant1	5710	41.36	5689.36	5730.72	PASS
	Ant2	5710	40.96	5689.52	5730.48	PASS
	Ant1	5710_UNII-2C	35.64	5689.36	5725	PASS
	Ant2	5710_UNII-2C	35.48	5689.52	5725	PASS
	Ant1	5710_UNII-3	5.72	5725	5730.72	PASS
	Ant2	5710_UNII-3	5.48	5725	5730.48	PASS
	Ant1	5755	41.28	5734.44	5775.72	PASS
	Ant2	5755	40.72	5734.60	5775.32	PASS
	Ant1	5795	41.04	5774.44	5815.48	PASS
	Ant2	5795	40.56	5774.76	5815.32	PASS
11AC80MIMO	Ant1	5210	82.08	5169.04	5251.12	PASS
	Ant2	5210	80.96	5169.68	5250.64	PASS
	Ant1	5290	81.12	5249.52	5330.64	PASS
	Ant2	5290	81.28	5249.52	5330.80	PASS
	Ant1	5530	81.12	5489.52	5570.64	PASS
	Ant2	5530	81.12	5489.36	5570.48	PASS
	Ant1	5610	81.92	5569.36	5651.28	PASS
	Ant2	5610	81.44	5569.36	5650.80	PASS
	Ant1	5690	81.60	5649.20	5730.80	PASS
	Ant2	5690	80.96	5649.68	5730.64	PASS
	Ant1	5690_UNII-2C	75.8	5649.20	5725	PASS
	Ant2	5690_UNII-2C	75.32	5649.68	5725	PASS
	Ant1	5690_UNII-3	5.8	5725	5730.80	PASS
	Ant2	5690_UNII-3	5.64	5725	5730.64	PASS
	Ant1	5775	81.60	5734.36	5815.96	PASS
	Ant2	5775	80.80	5734.68	5815.48	PASS

11.1.2. Test Graphs

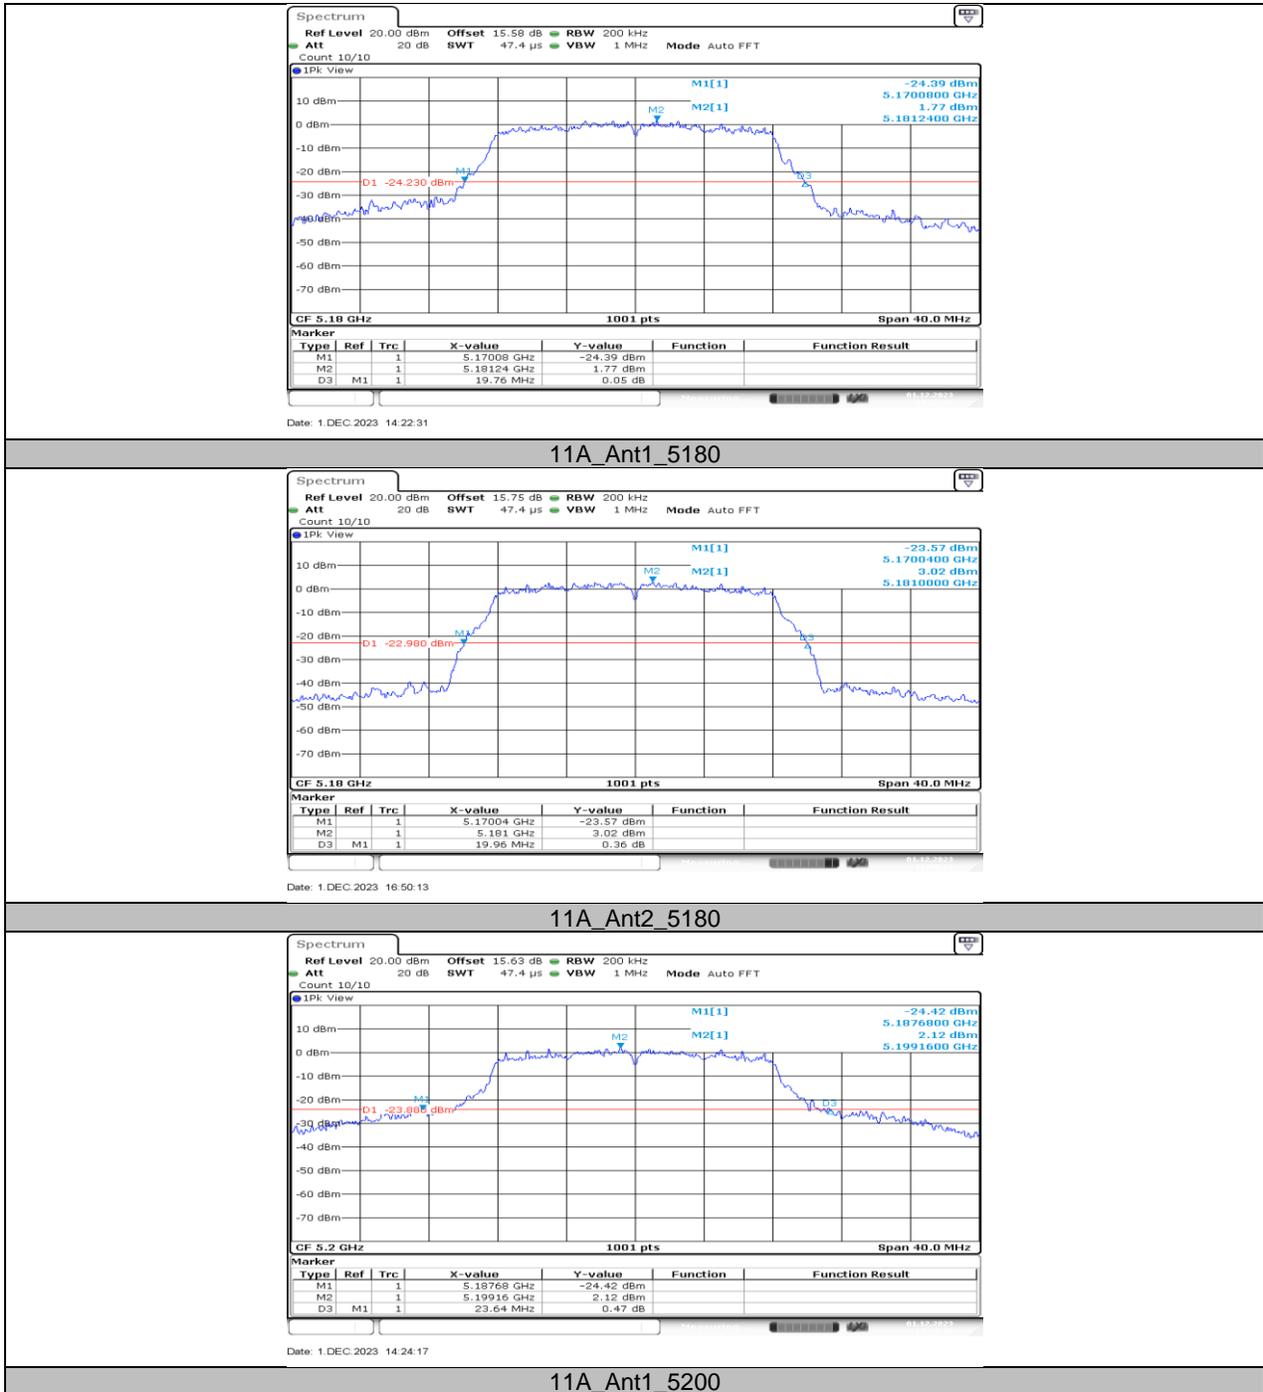


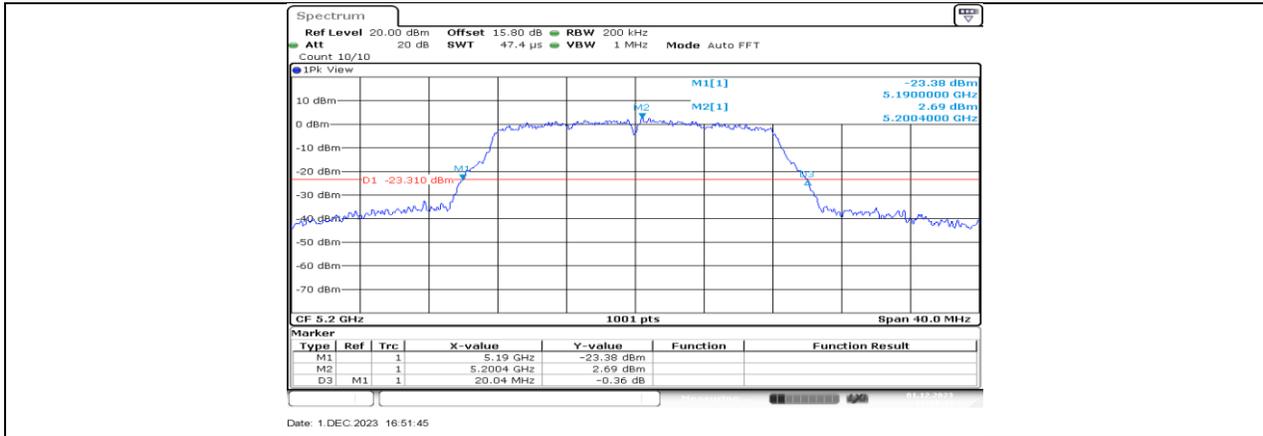


Date: 1.DEC.2023 16:51:45

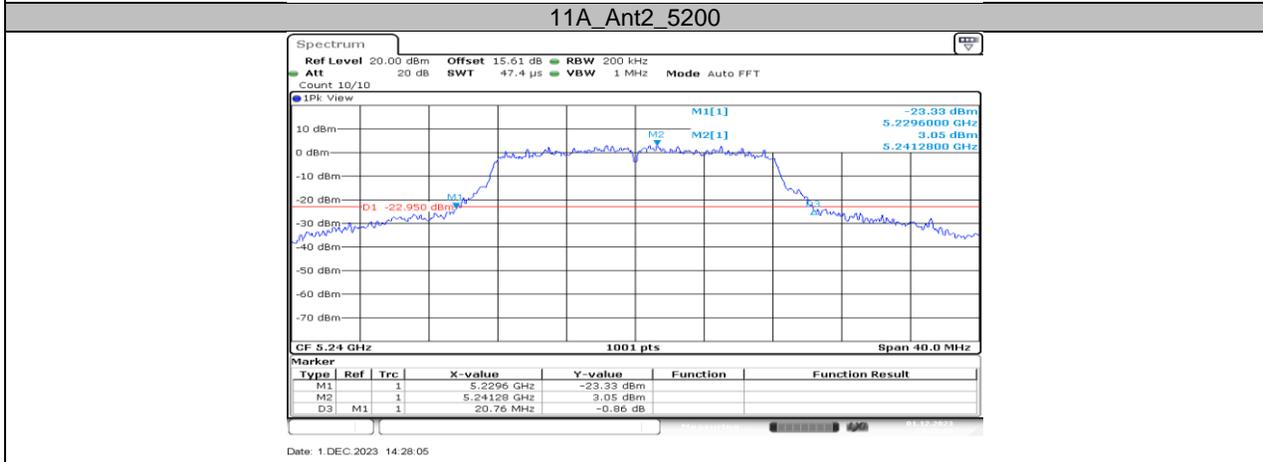




Date: 1.DEC.2023 14:28:05

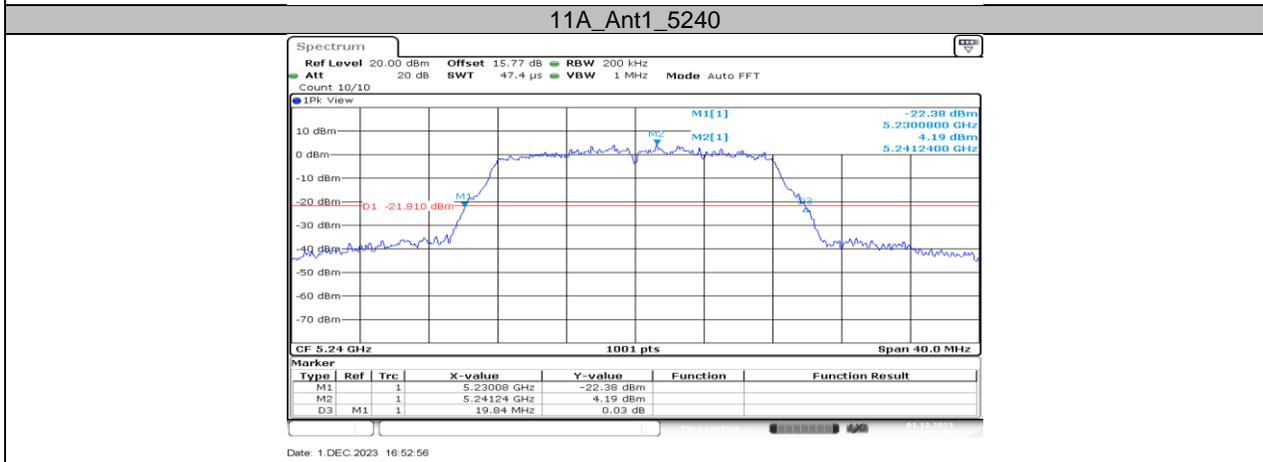


Date: 1.DEC.2023 16:52:56

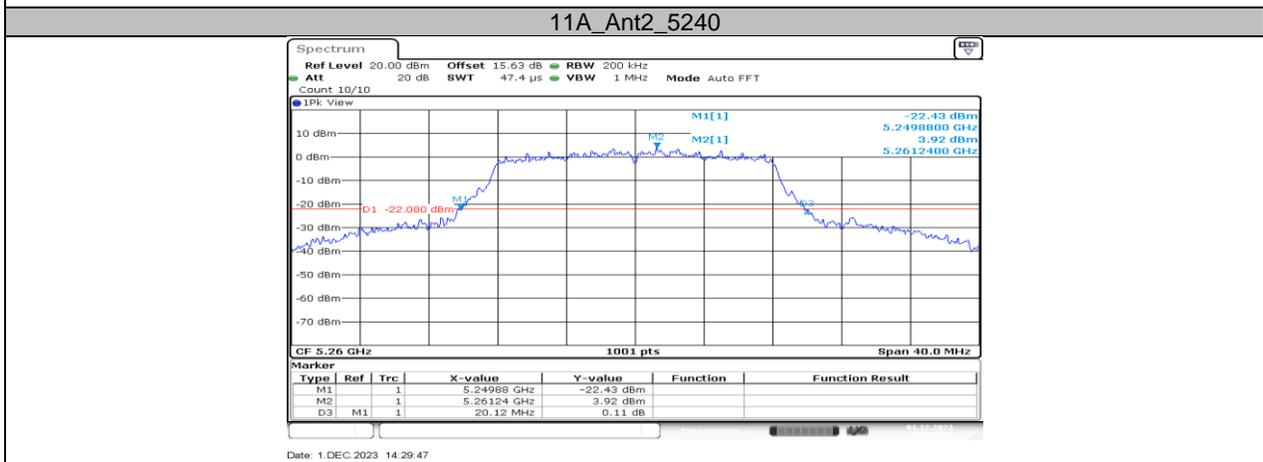


Date: 1.DEC.2023 14:29:47

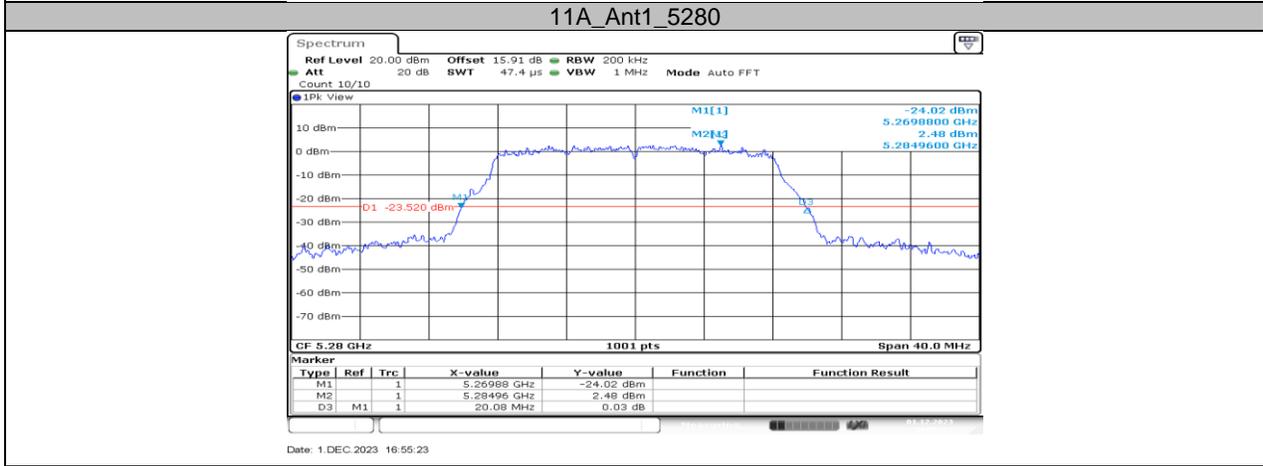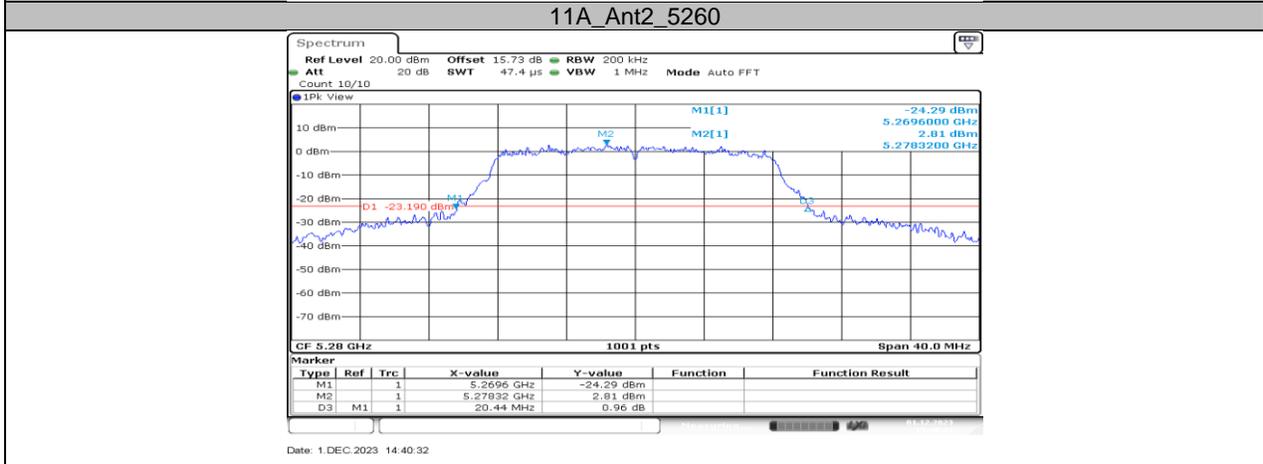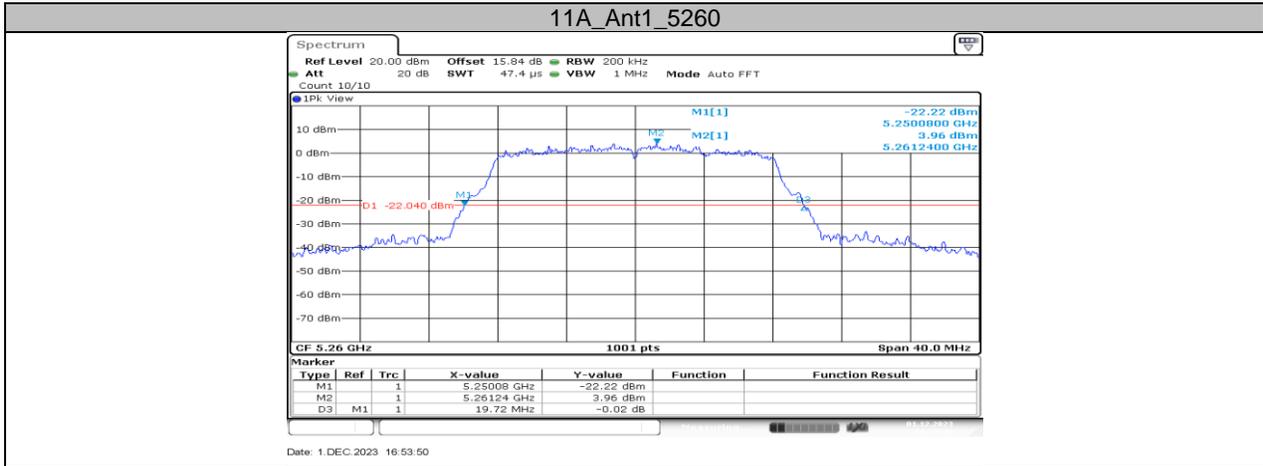


11A_Ant2_5280

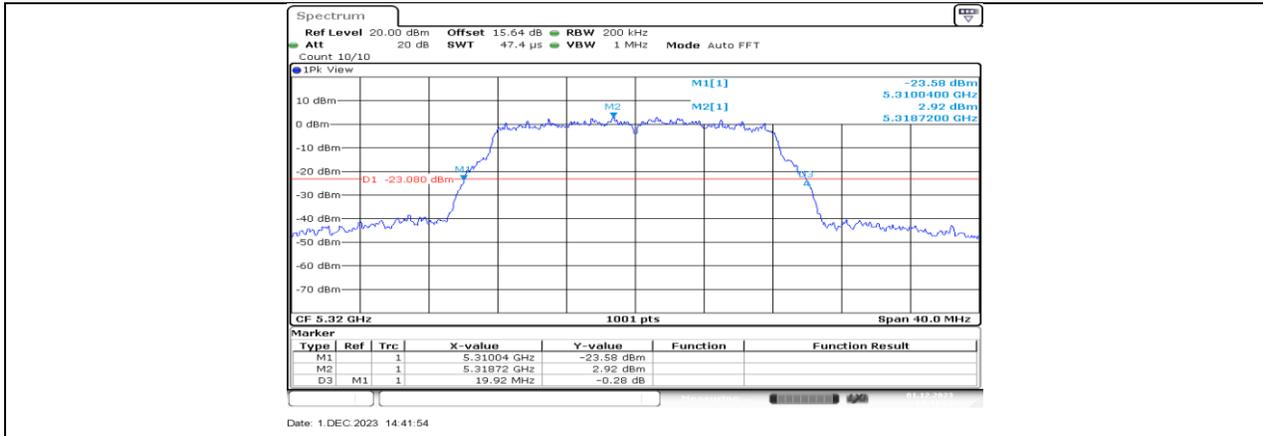


Date: 1.DEC.2023 14:41:54

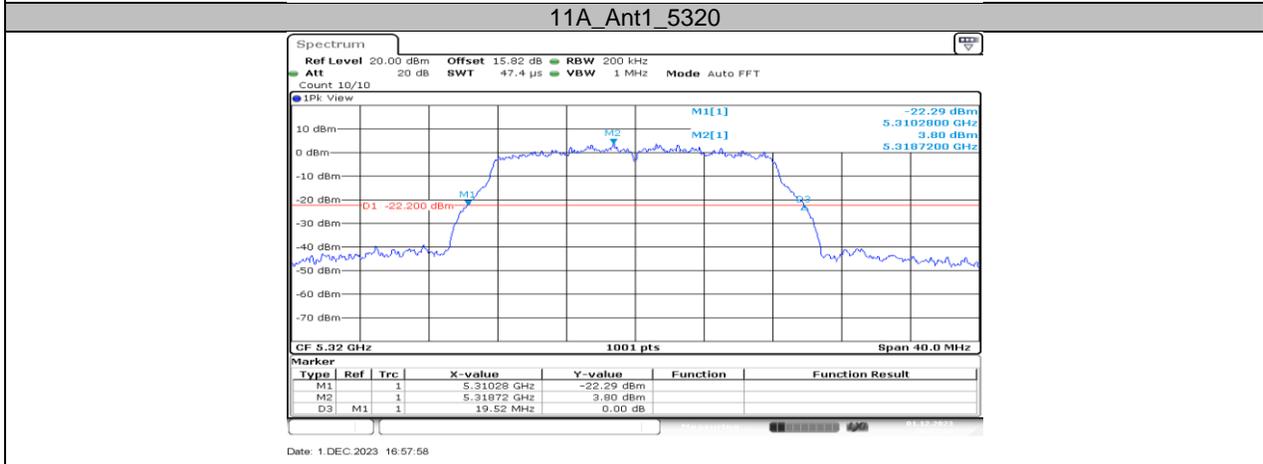



Date: 1.DEC.2023 16:57:58

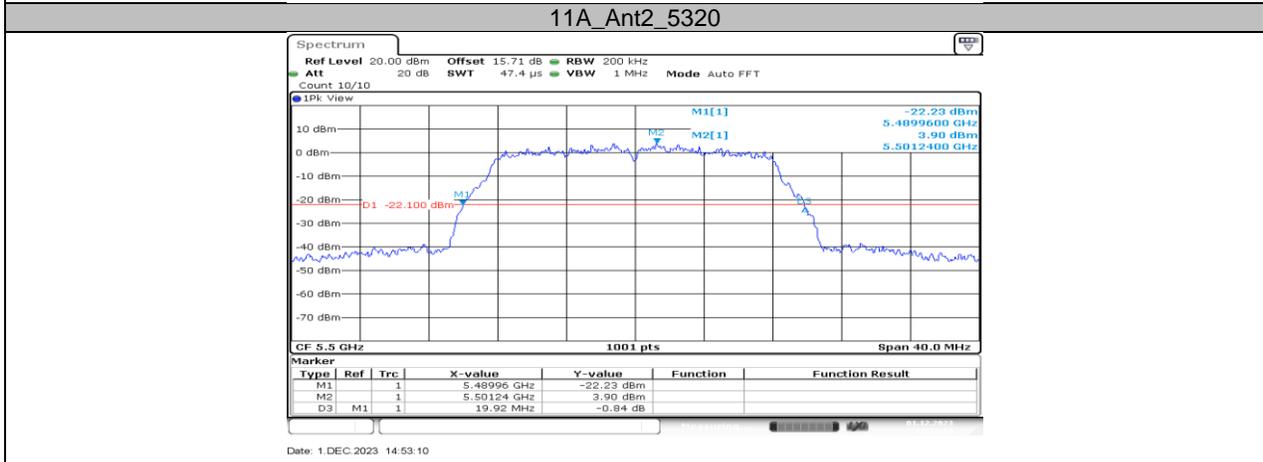


Date: 1.DEC.2023 14:53:10

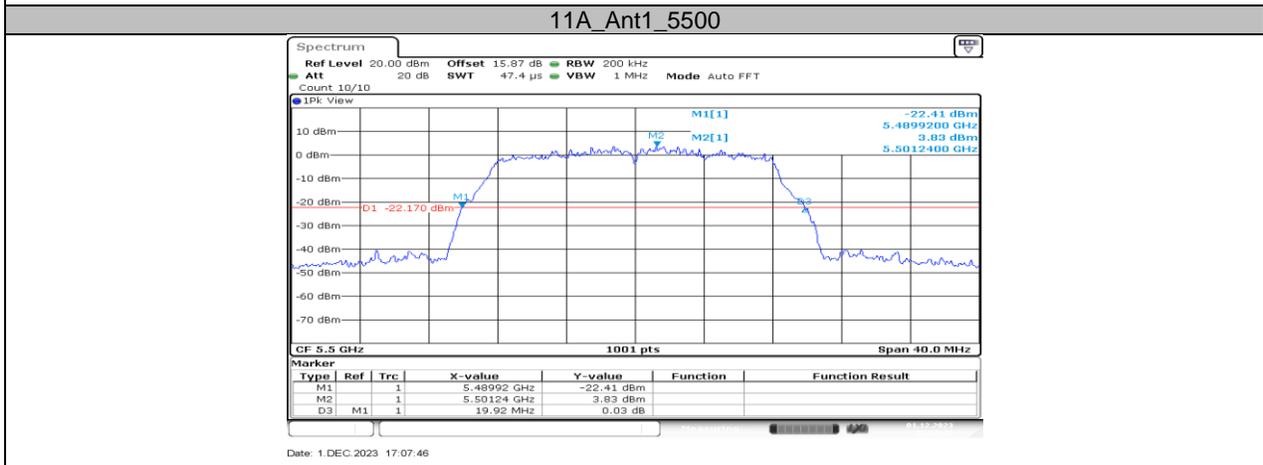


Date: 1.DEC.2023 17:07:46

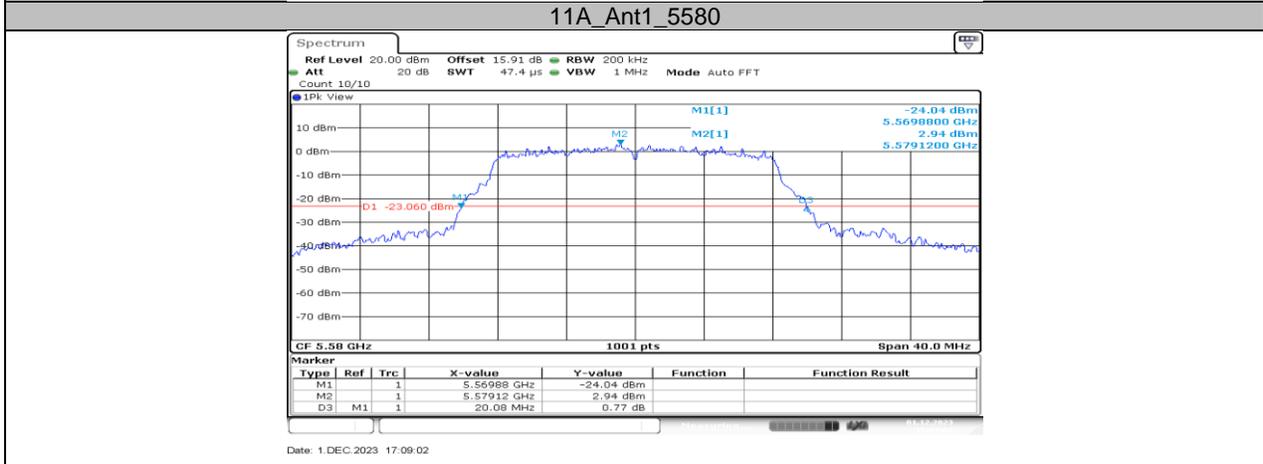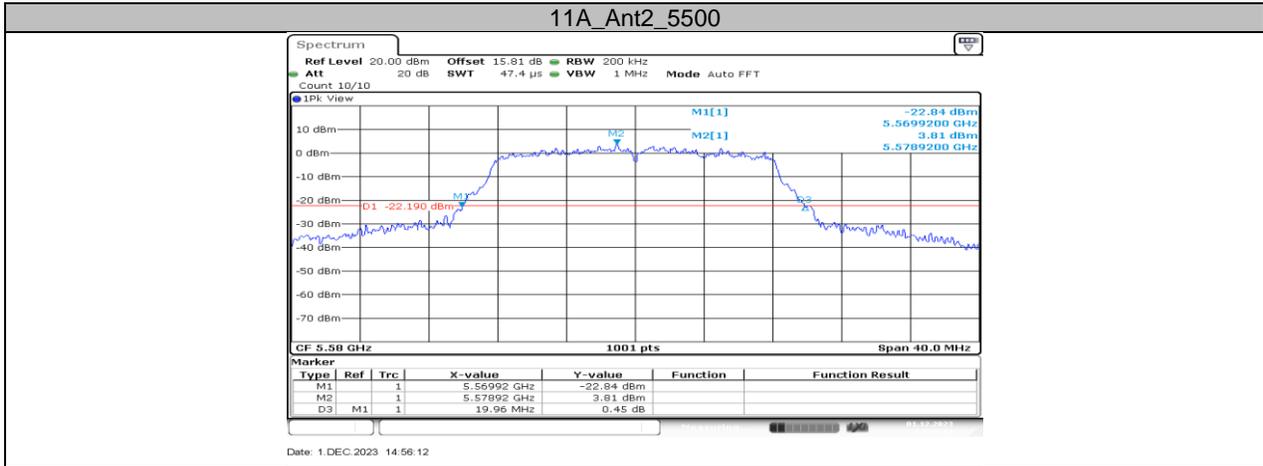

11A_Ant1_5700

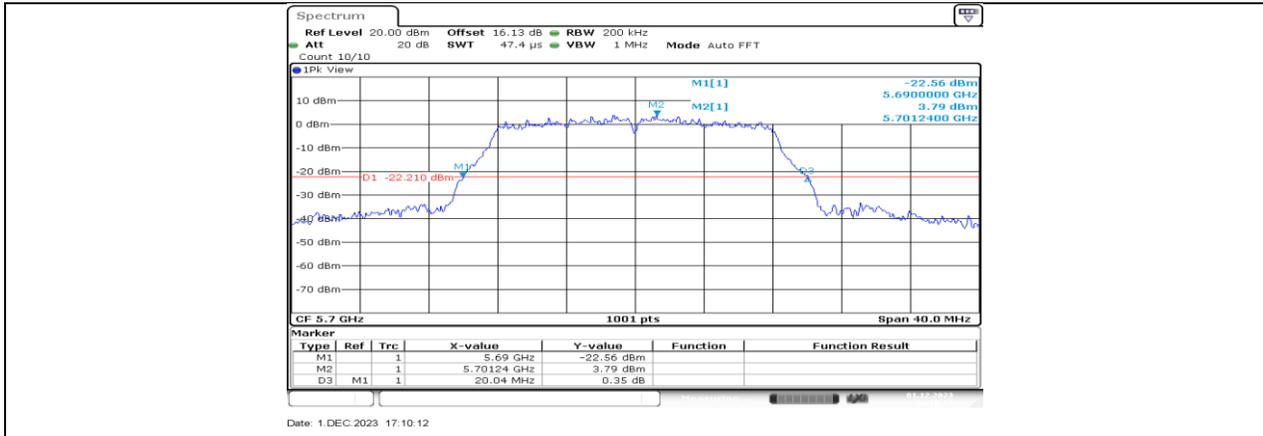


Date: 1.DEC.2023 17:10:12

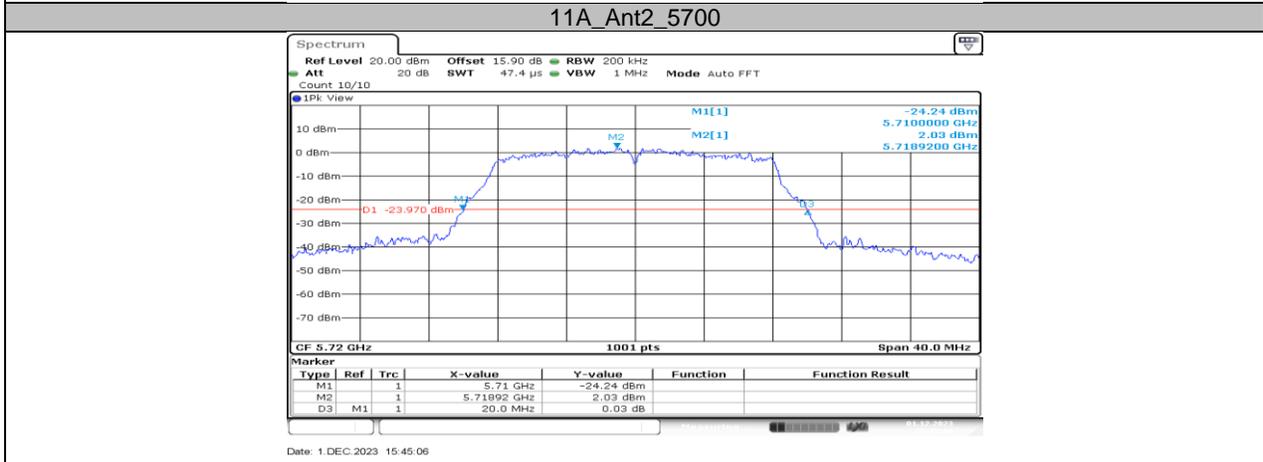




Date: 1.DEC.2023 15:45:06




Date: 1.DEC.2023 17:12:52

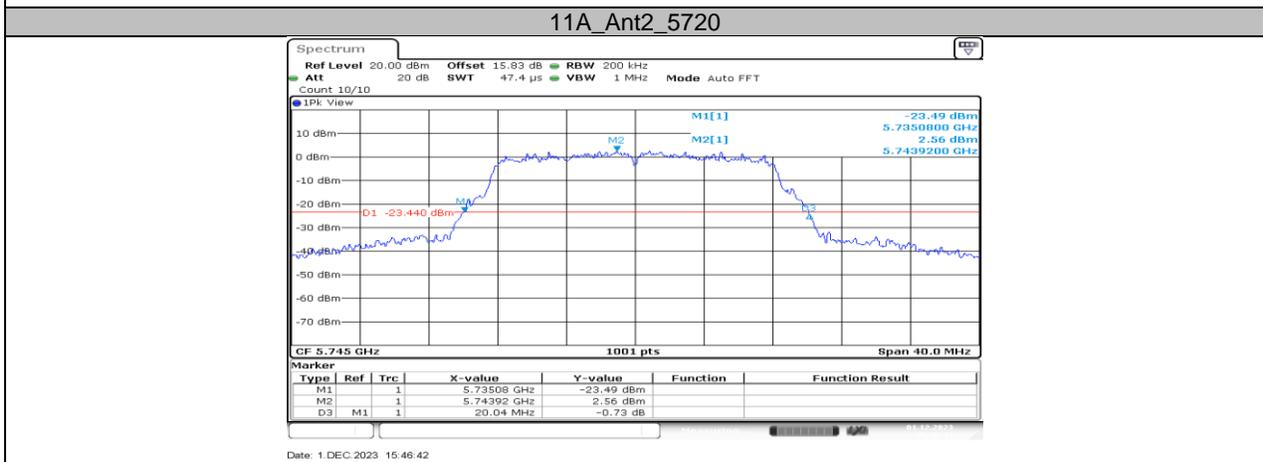

Date: 1.DEC.2023 15:46:42

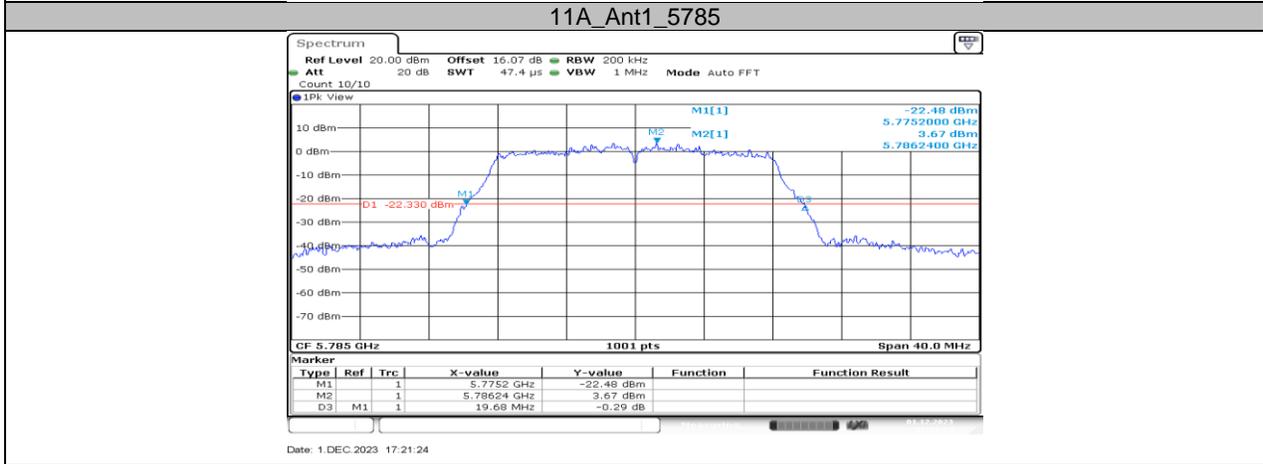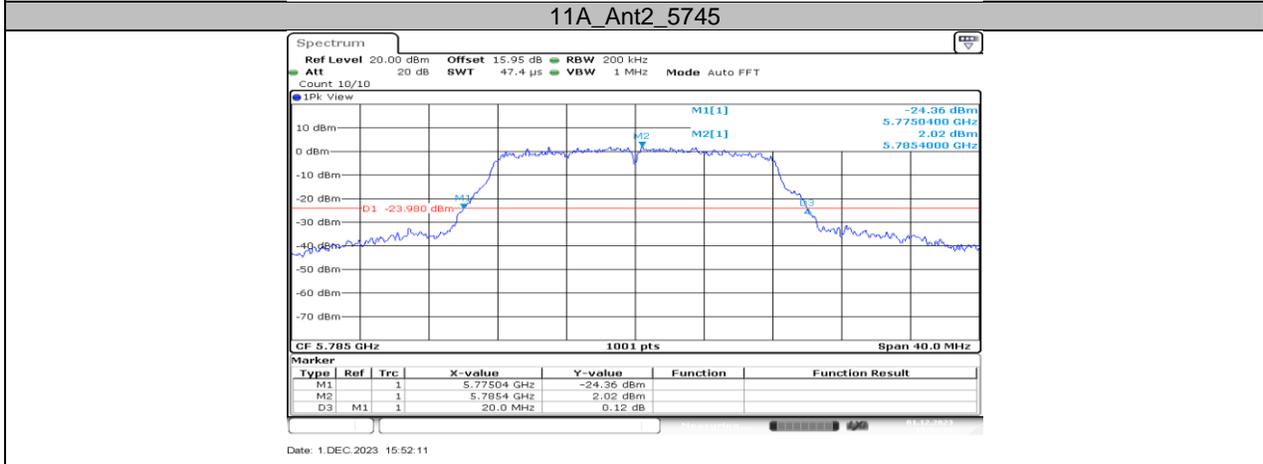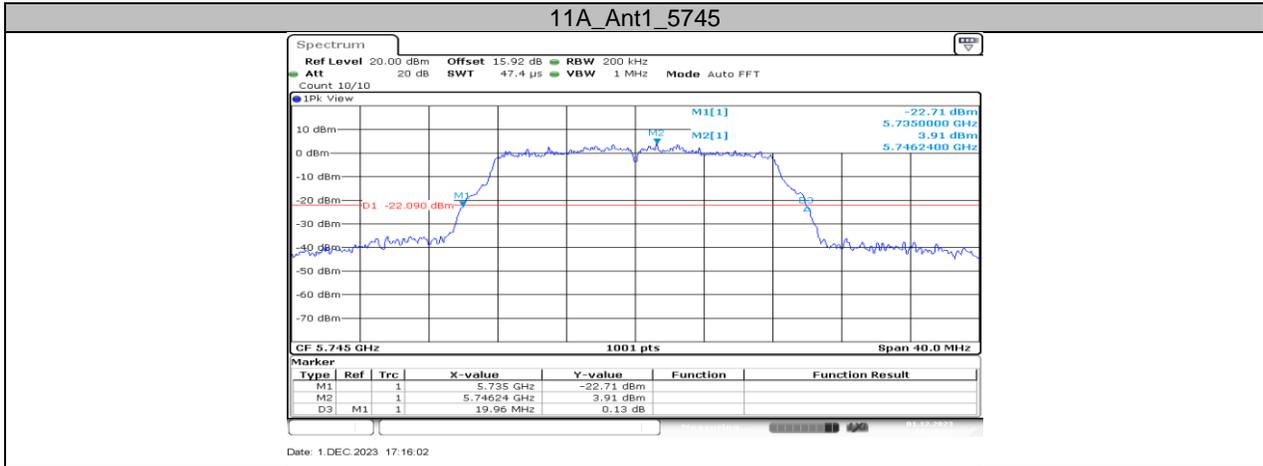


11A_Ant2_5785

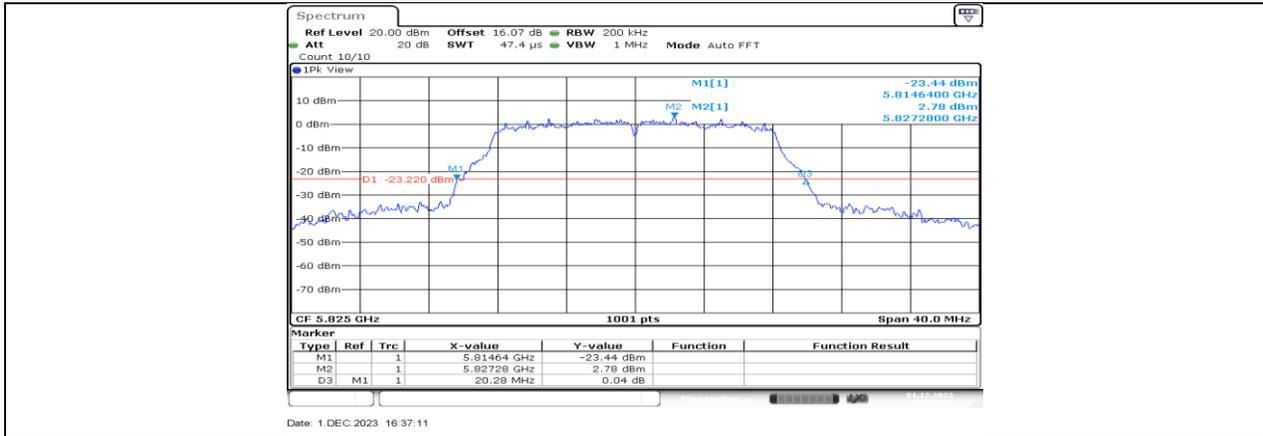


Date: 1.DEC.2023 16:37:11

11A_Ant1_5825

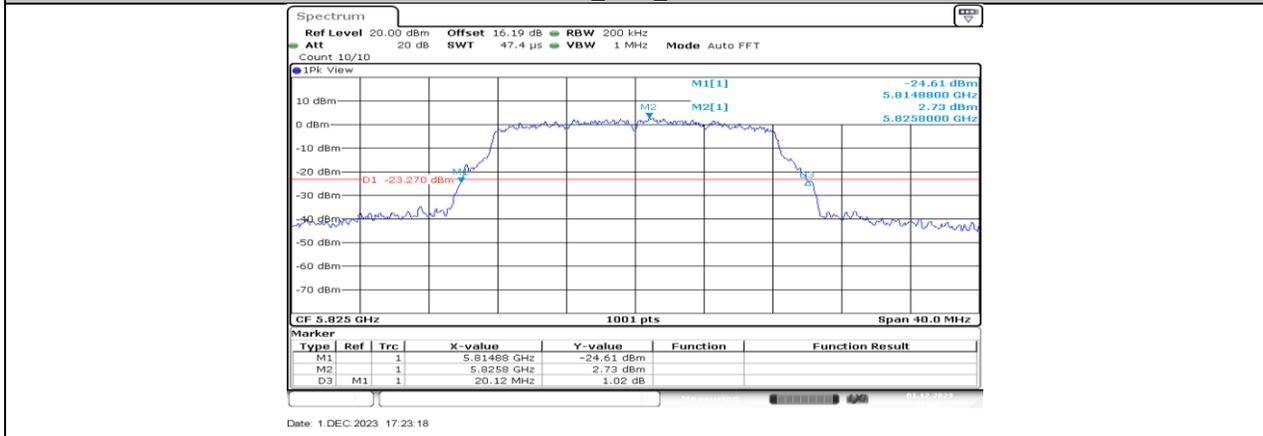


Date: 1.DEC.2023 17:23:18

11A_Ant2_5825

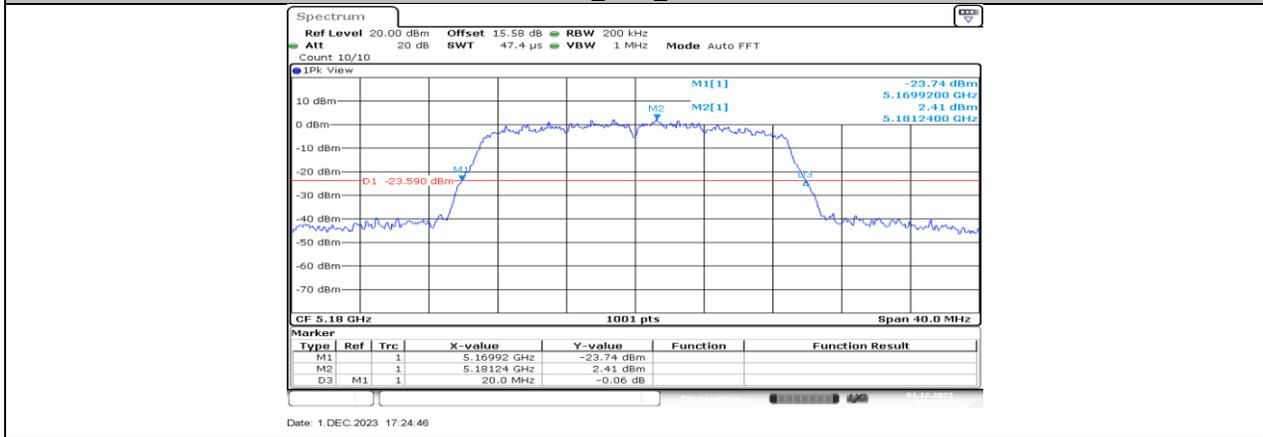


Date: 1.DEC.2023 17:24:46





11N20MIMO_Ant1_5180

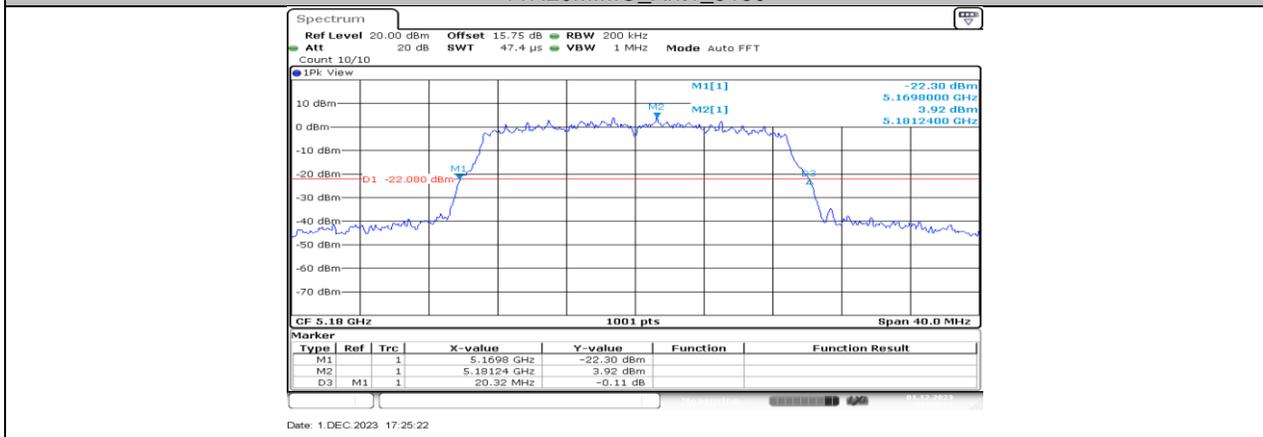



Date: 1.DEC.2023 17:25:22

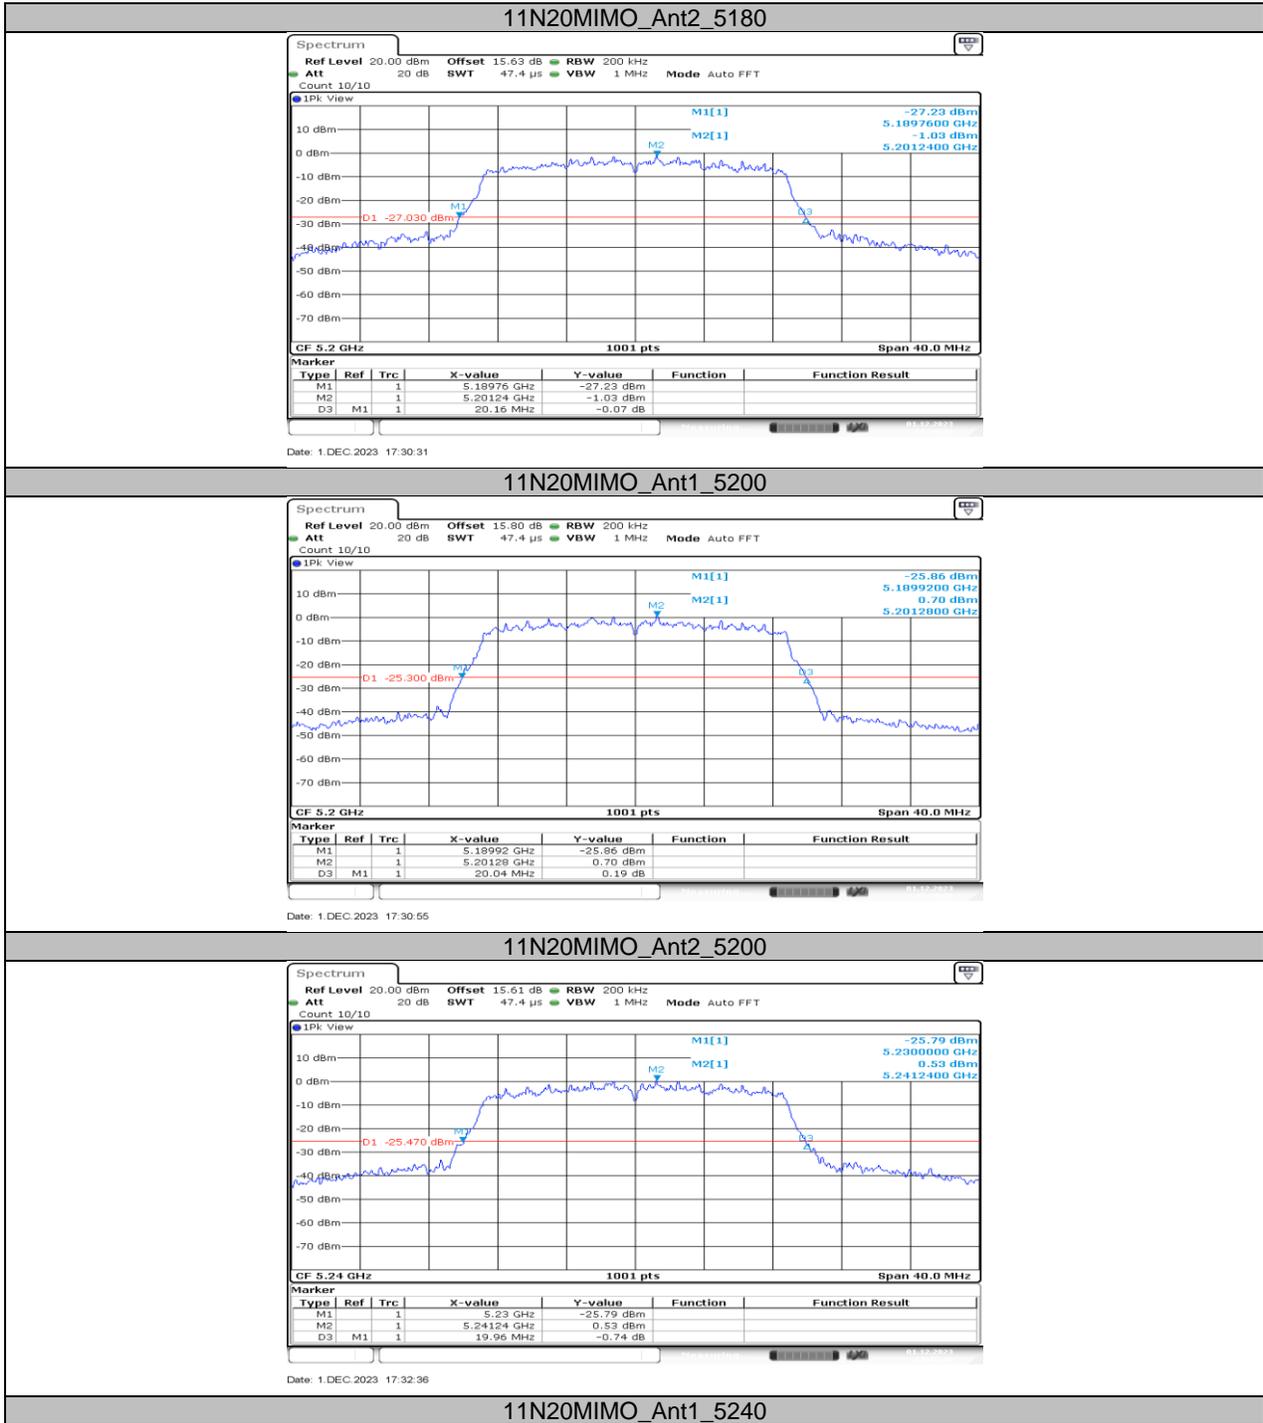


11N20MIMO_Ant1_5240

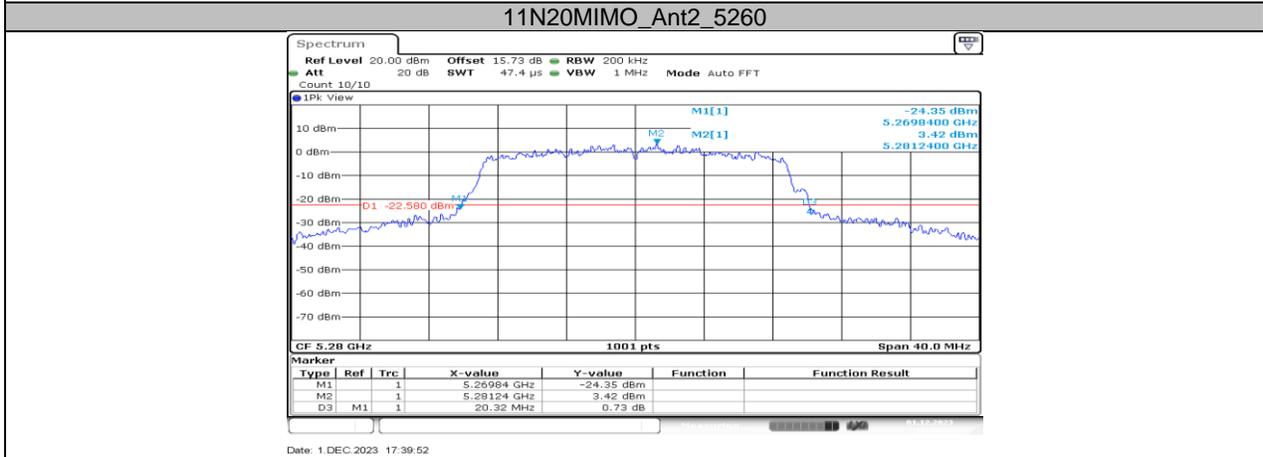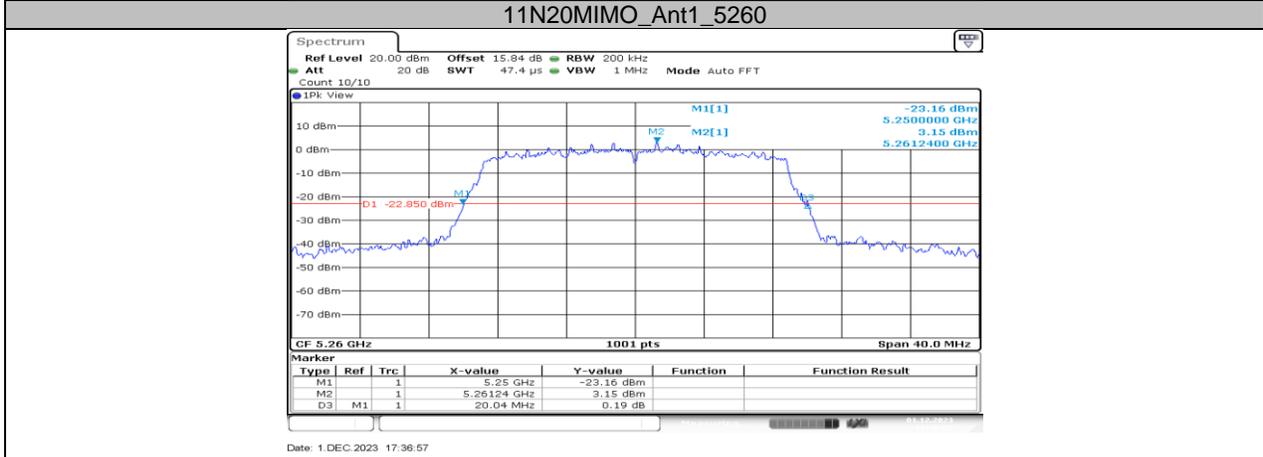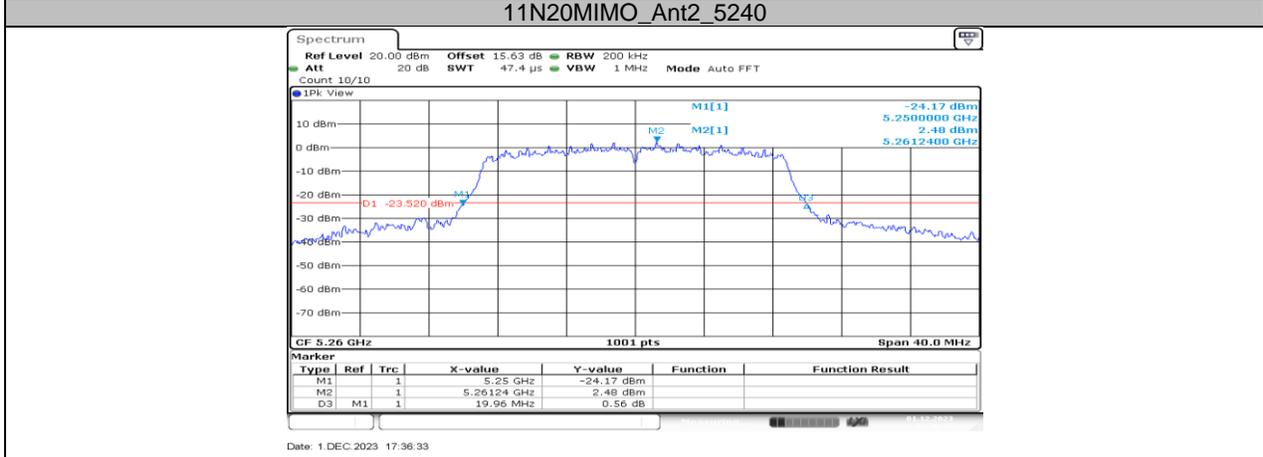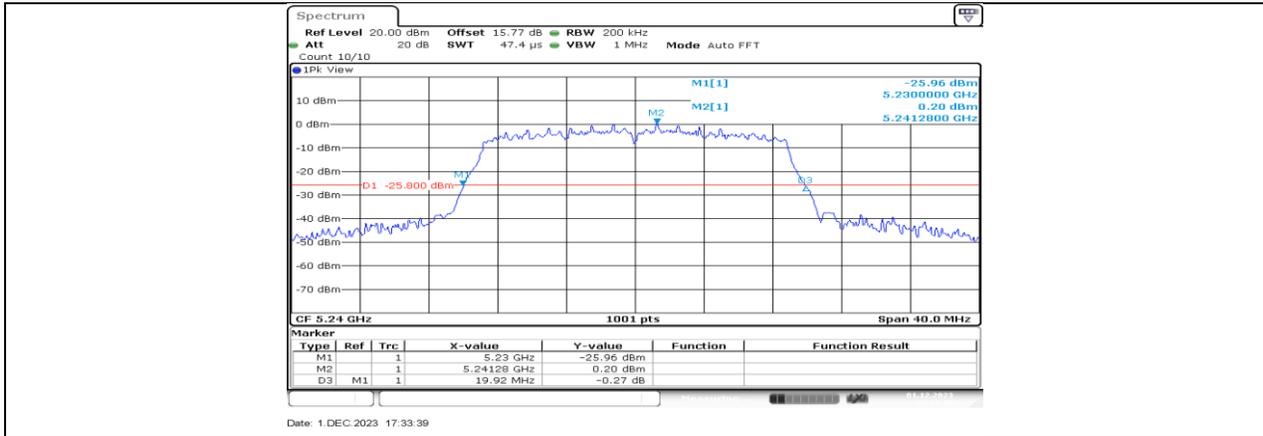

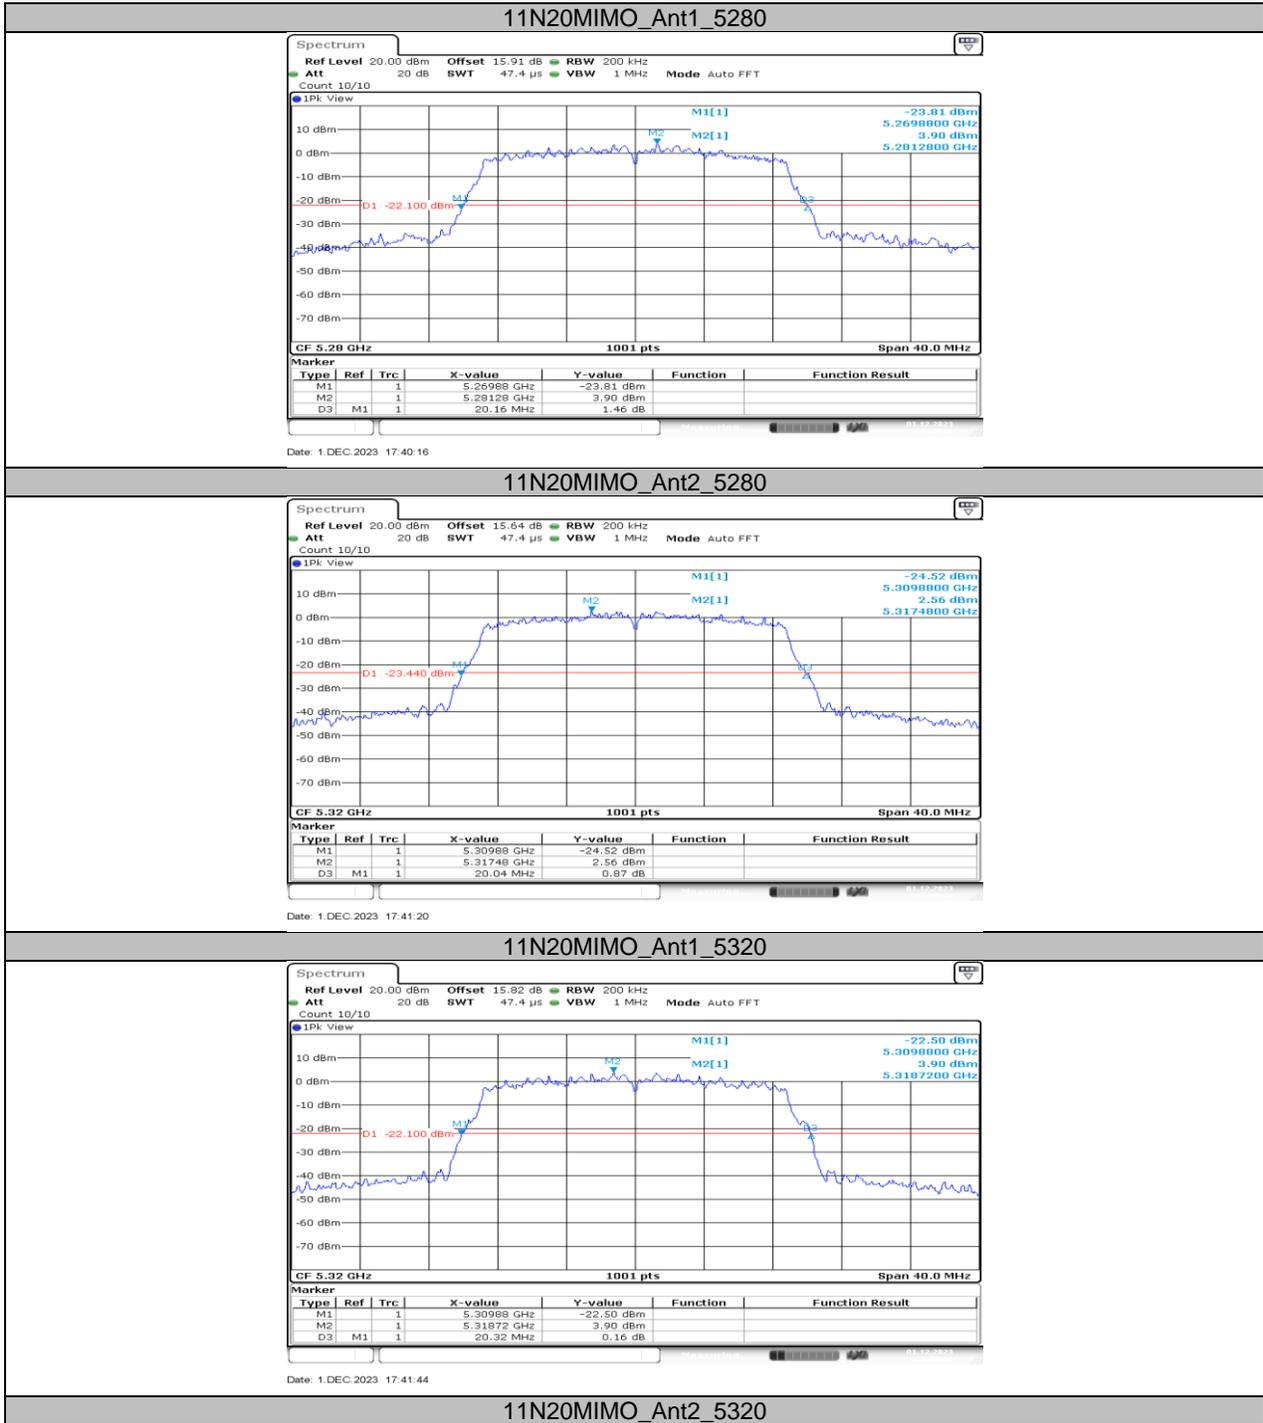


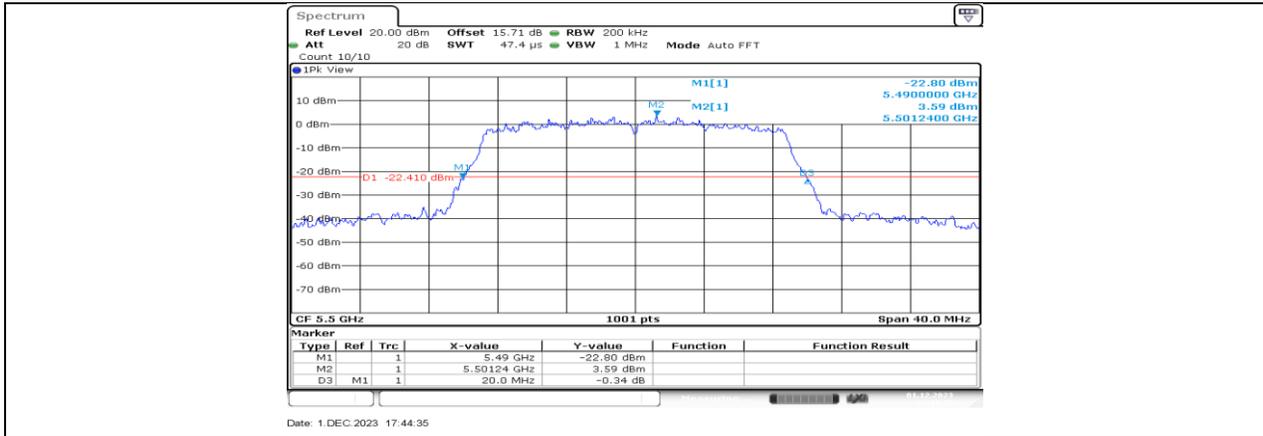


Date: 1. DEC 2023 17:44:35

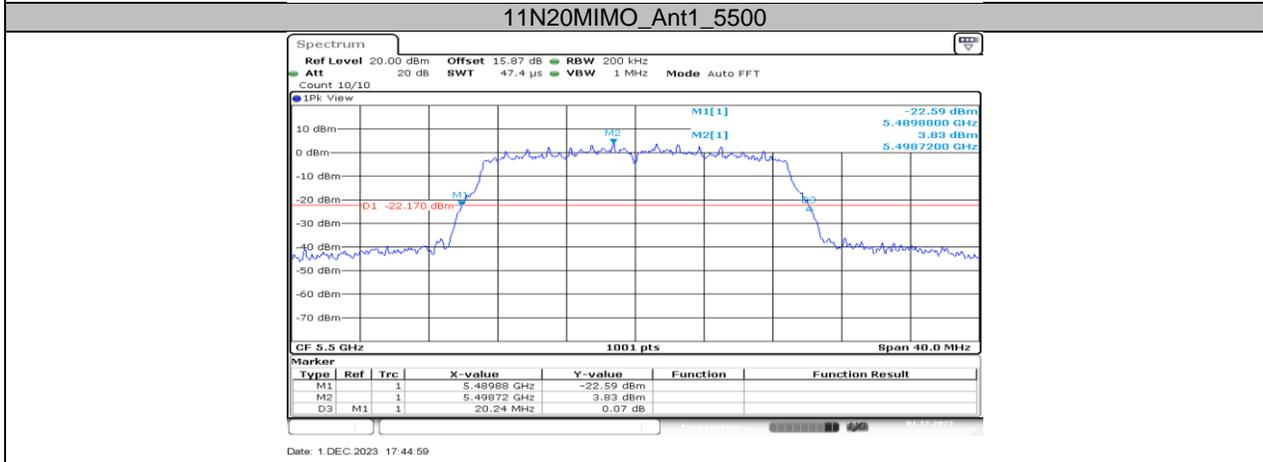




Date: 1. DEC 2023 17:44:59

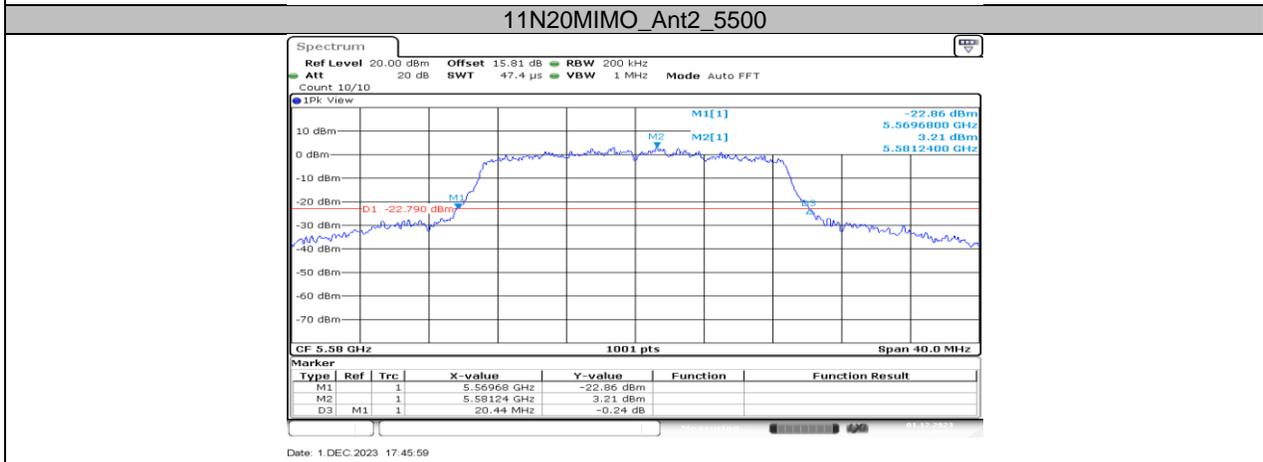


Date: 1. DEC 2023 17:45:59

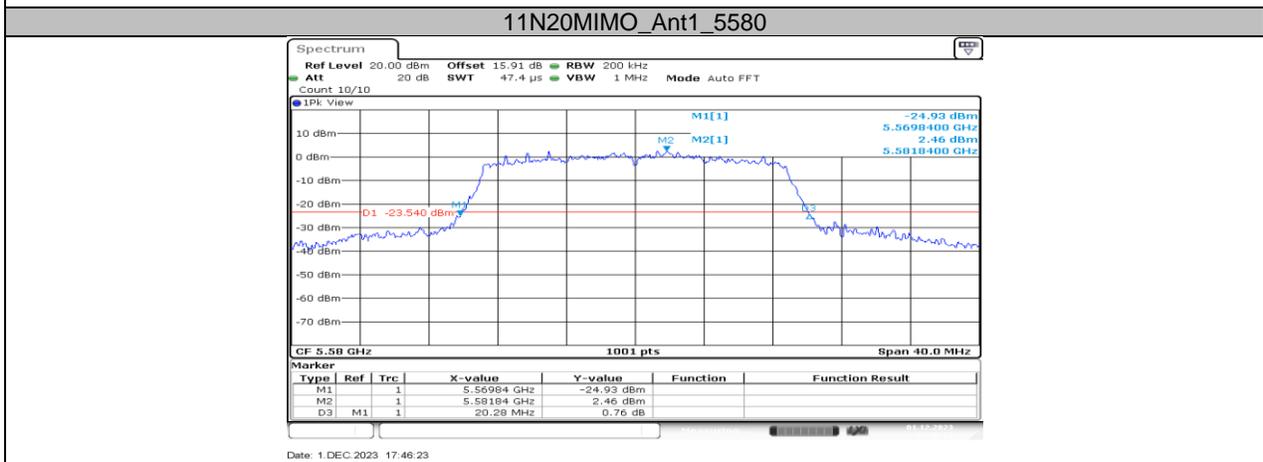


Date: 1. DEC 2023 17:46:23

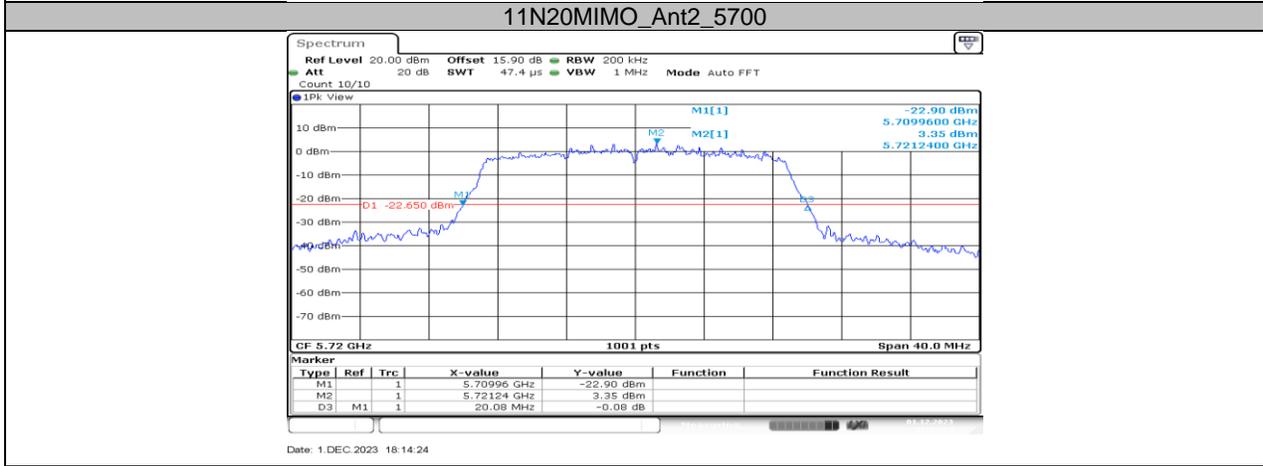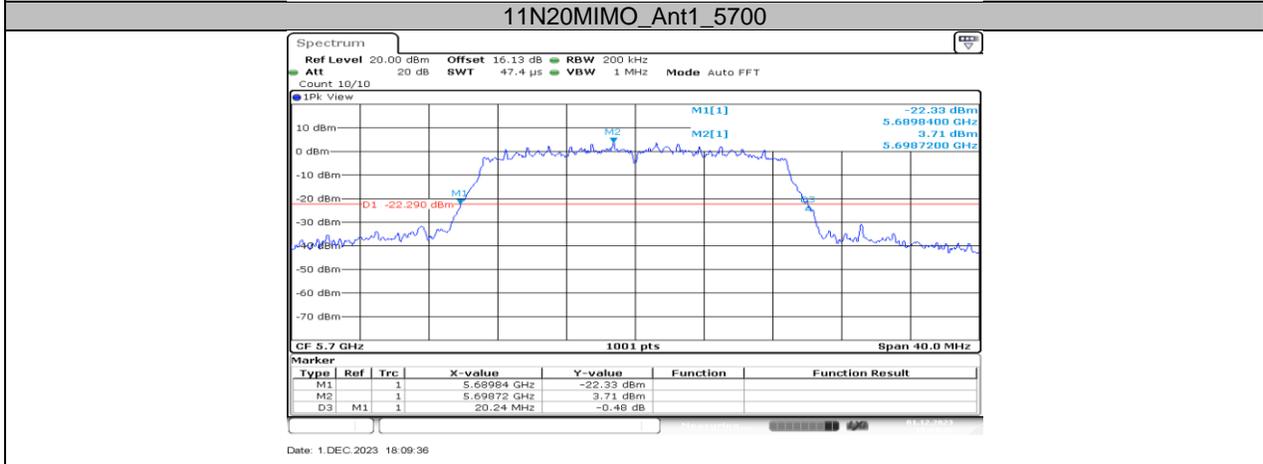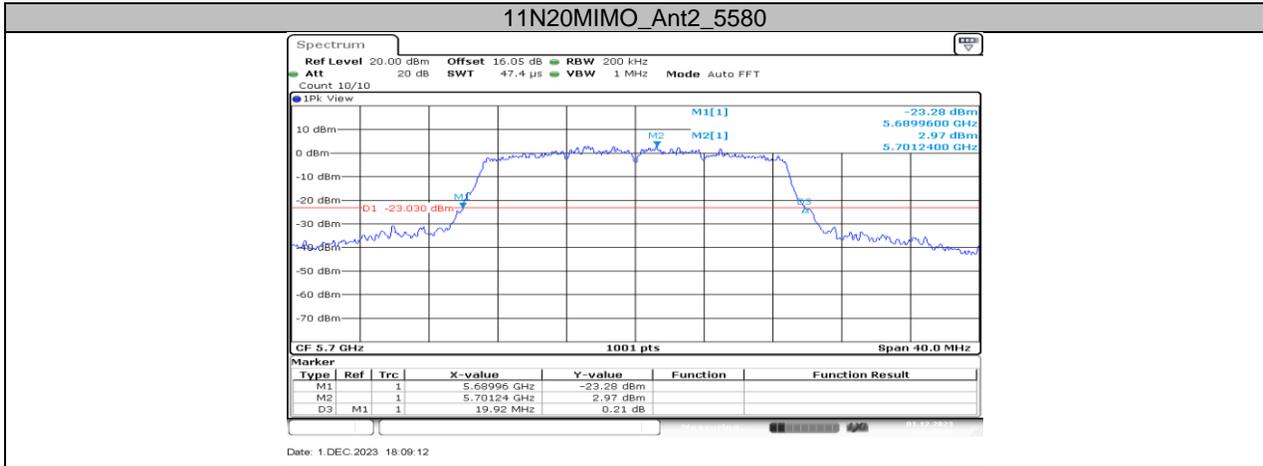

11N20MIMO_Ant1_5720

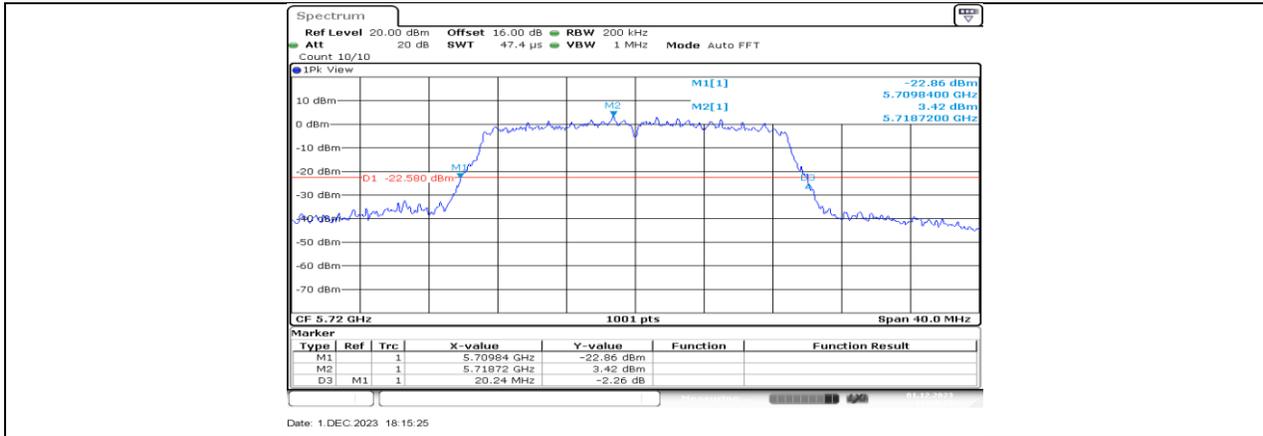

Date: 1.DEC.2023 18:15:25

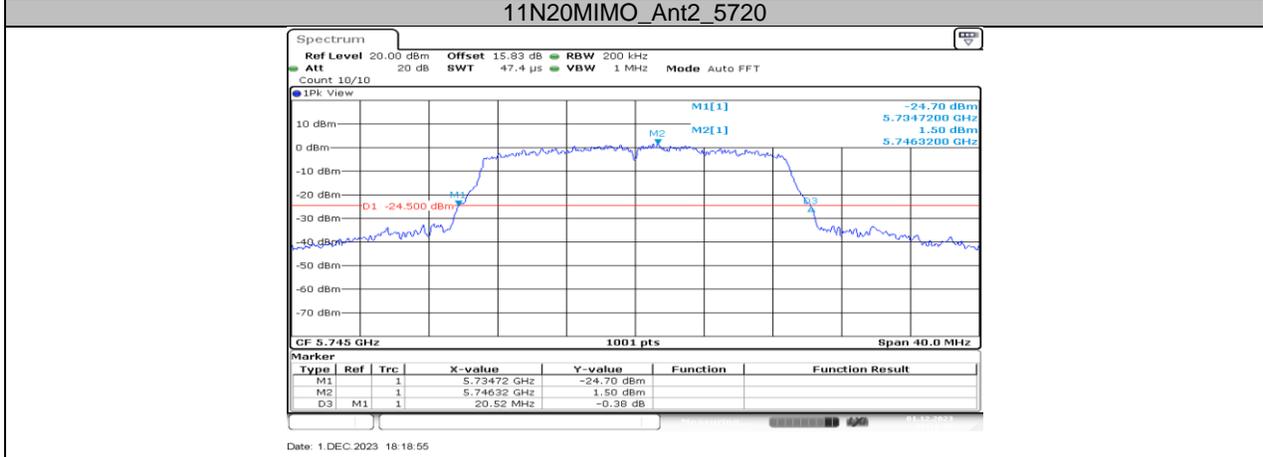


Date: 1.DEC.2023 18:18:55








Date: 1.DEC.2023 18:19:27






Date: 1.DEC.2023 18:20:34



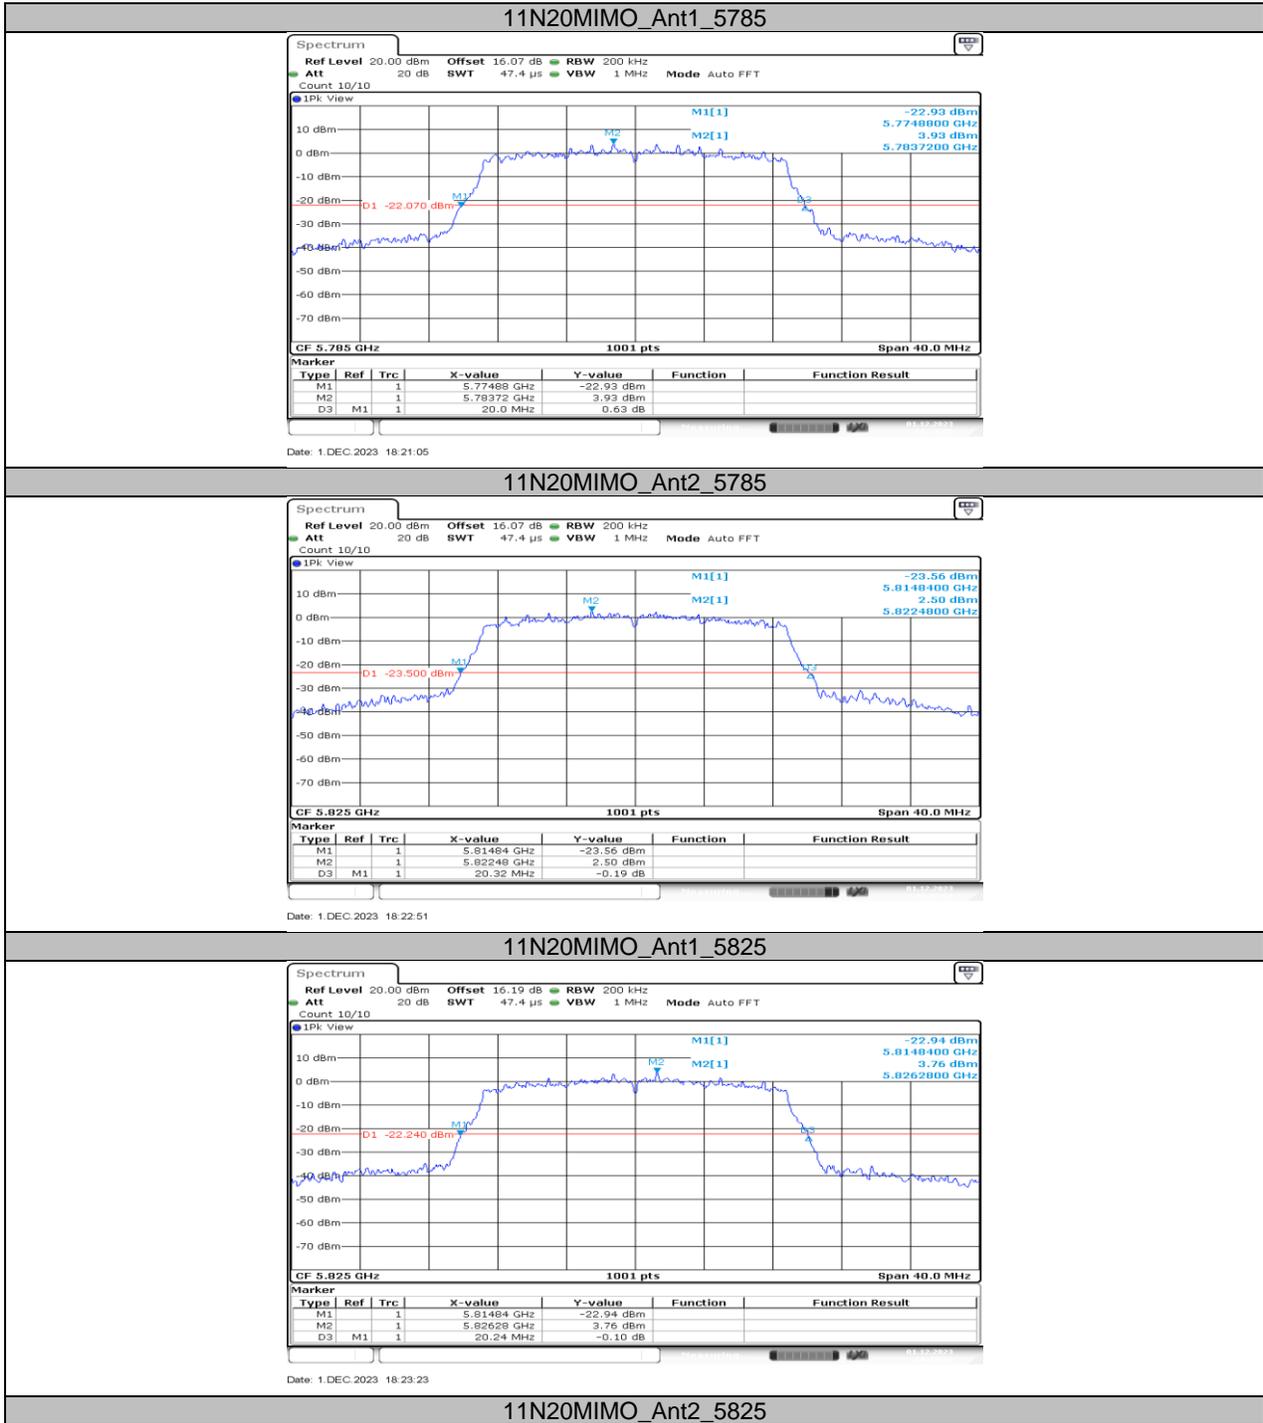


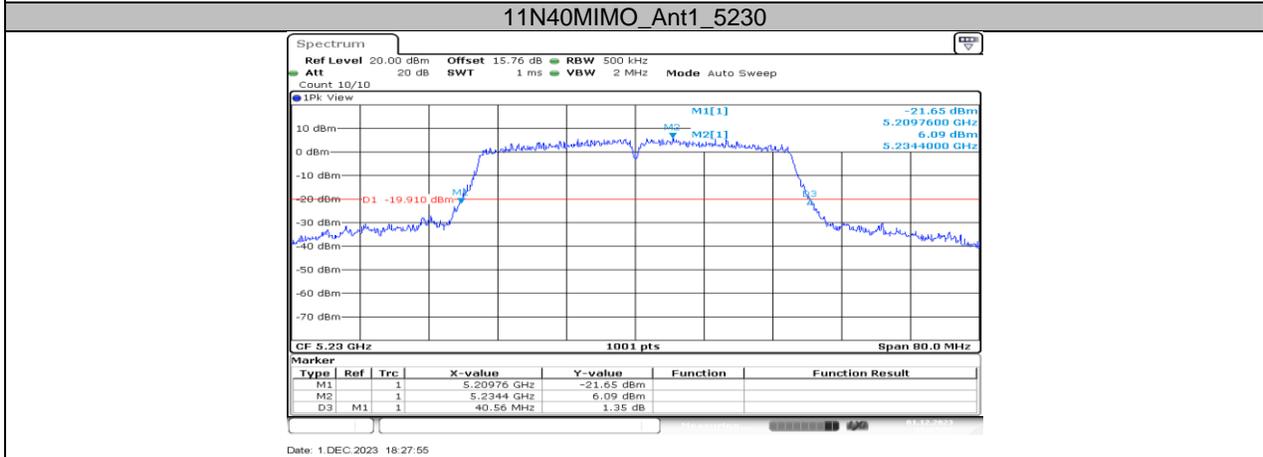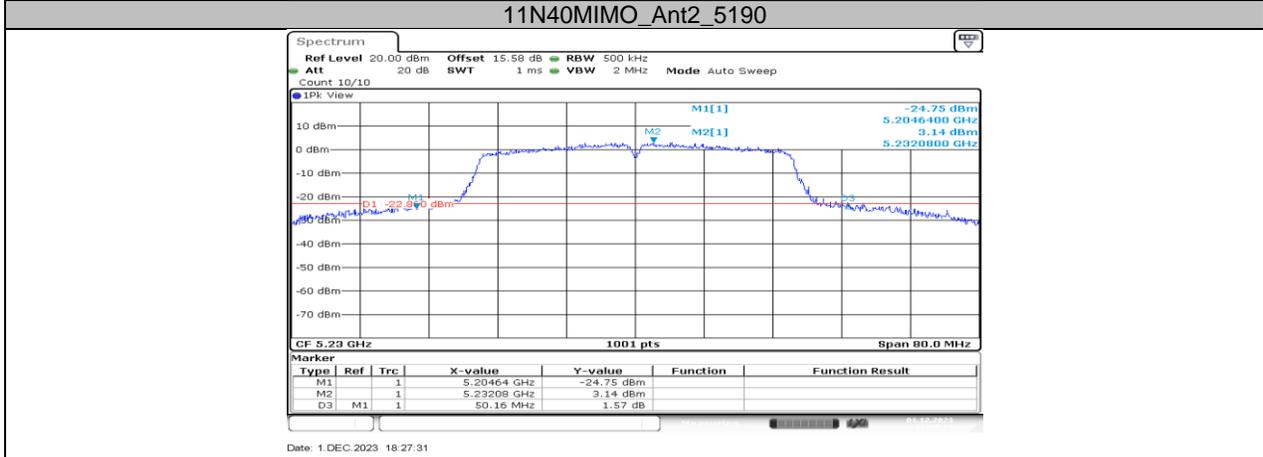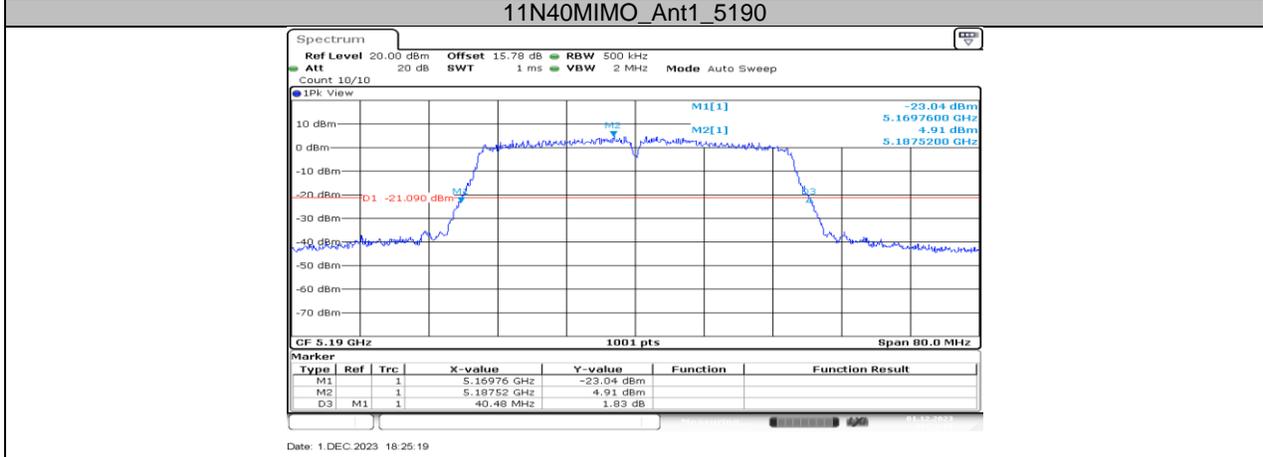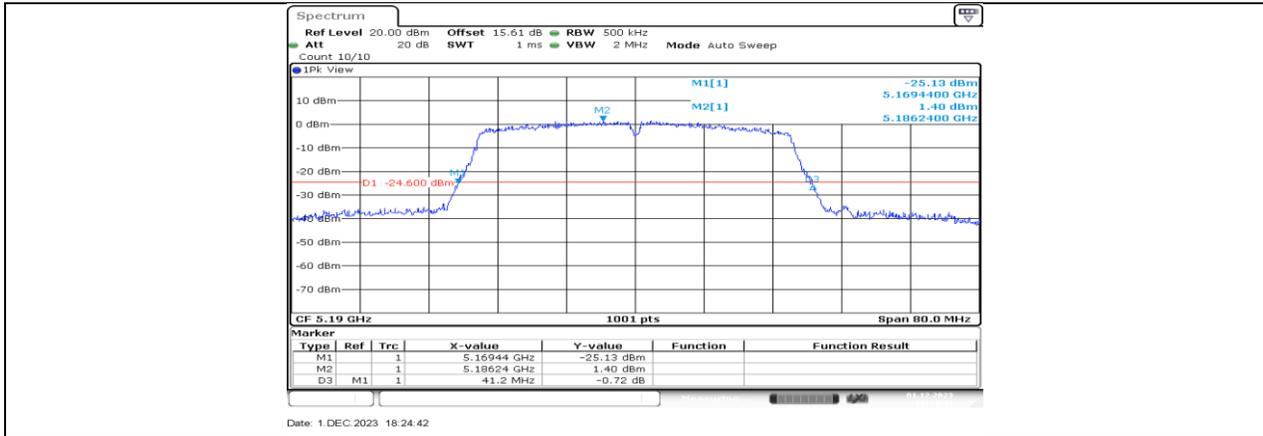





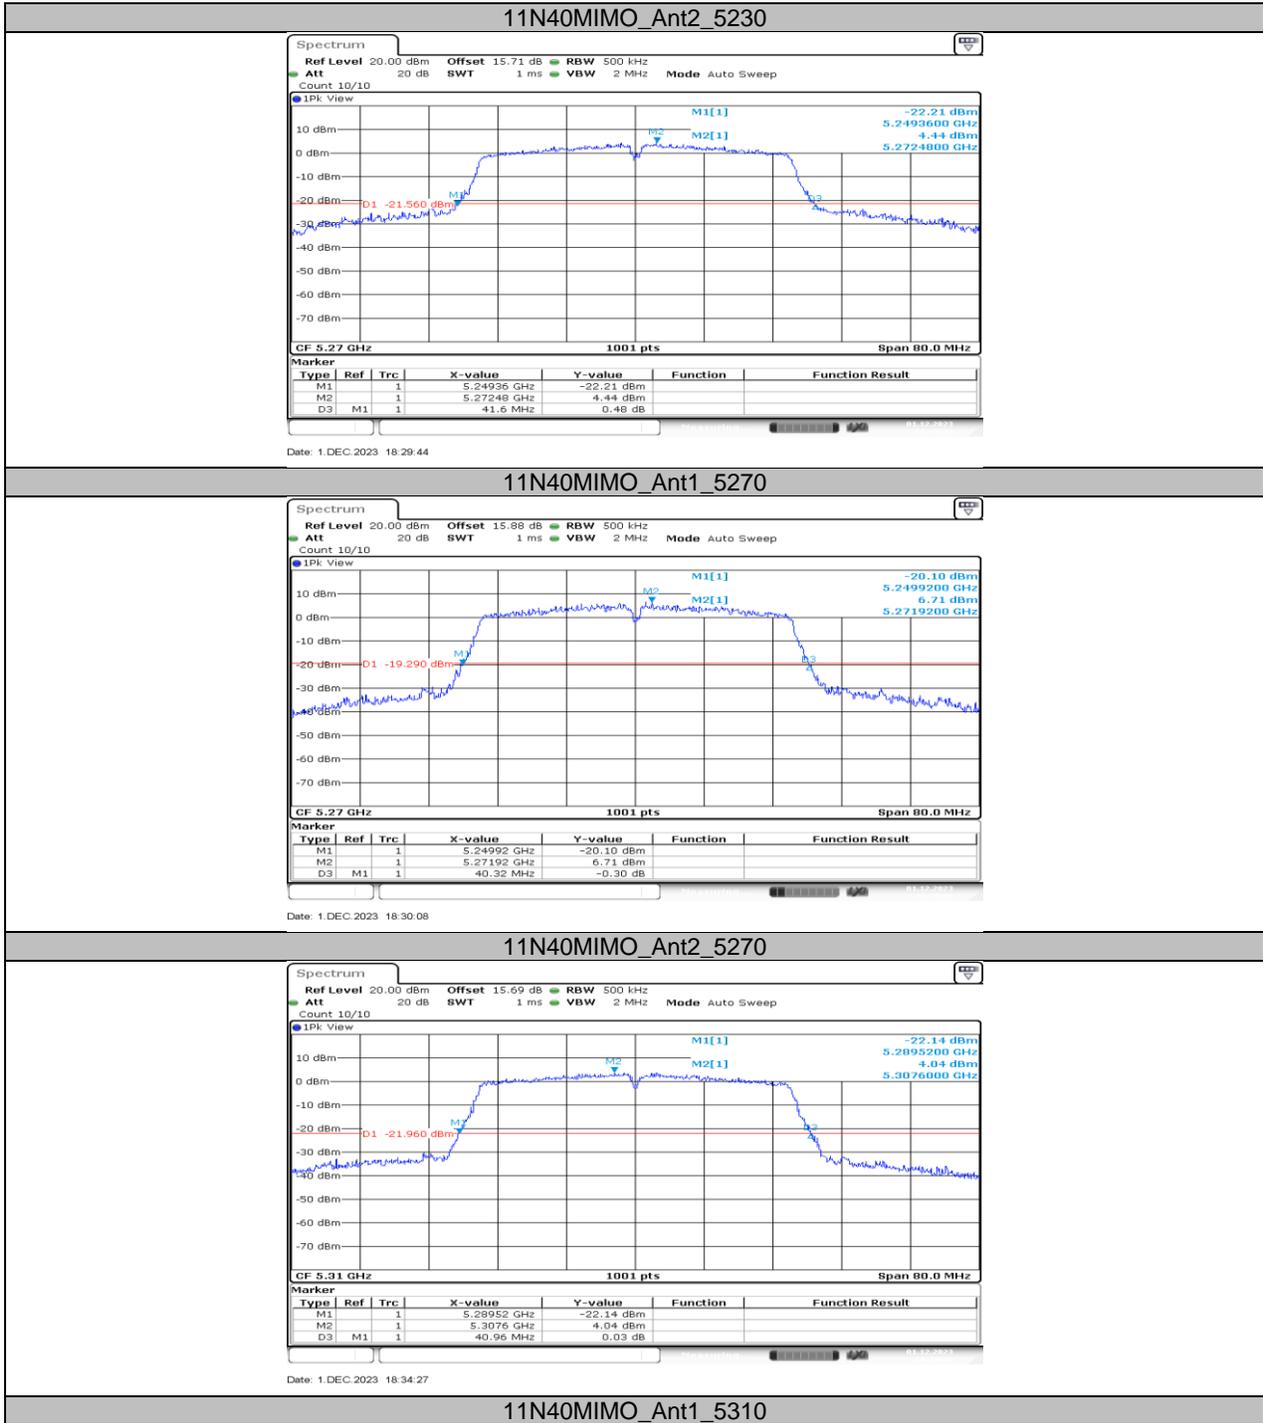


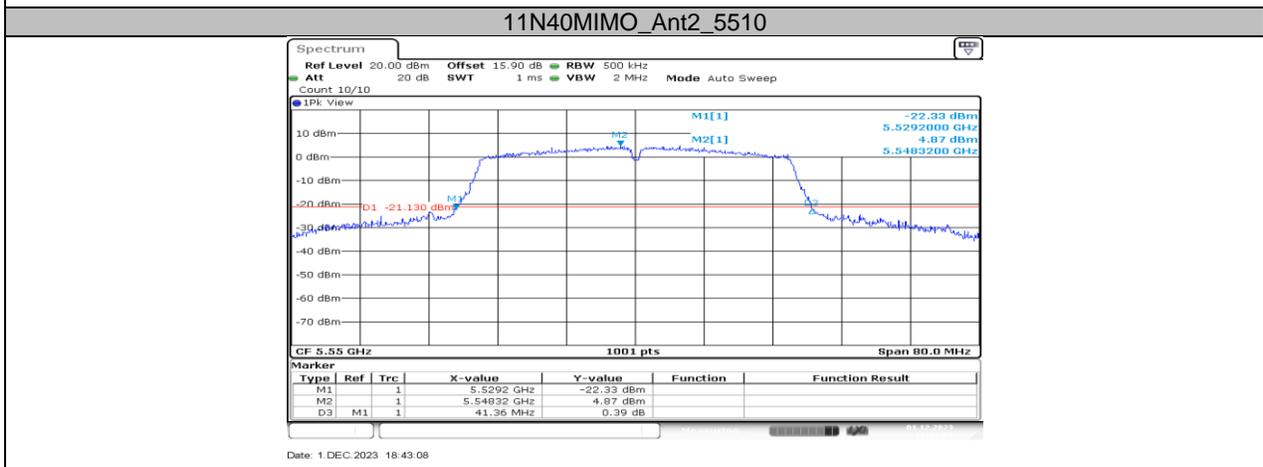
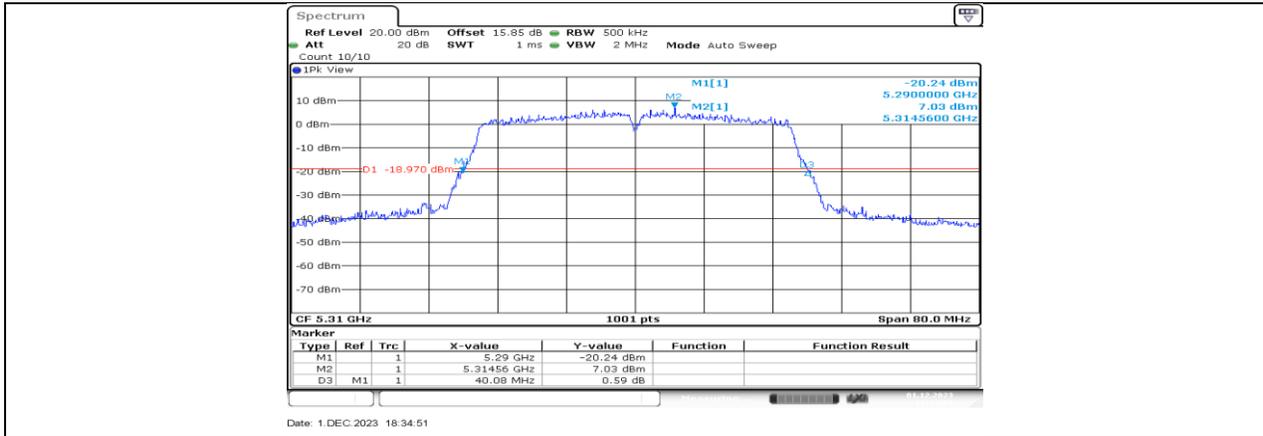


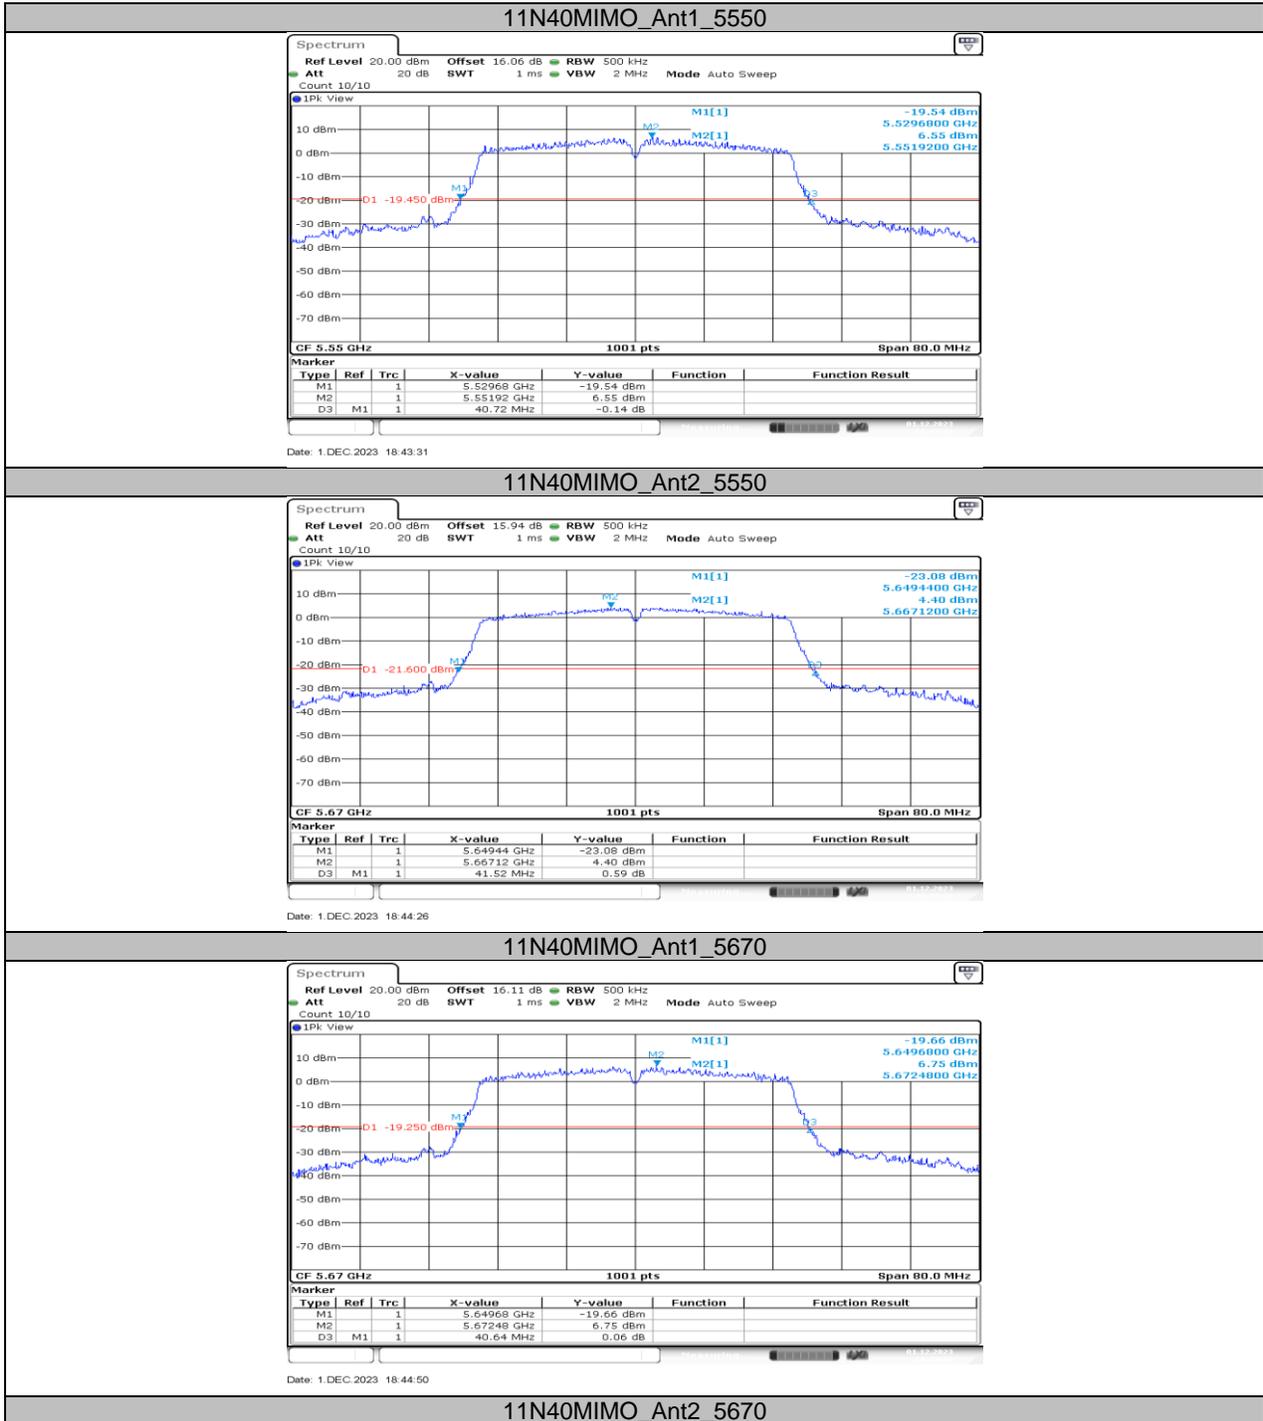

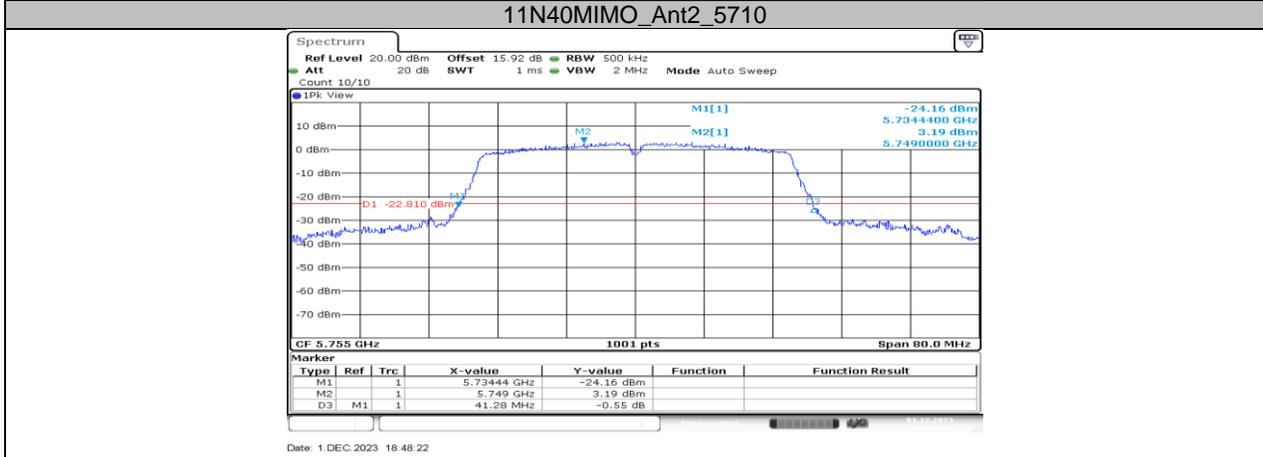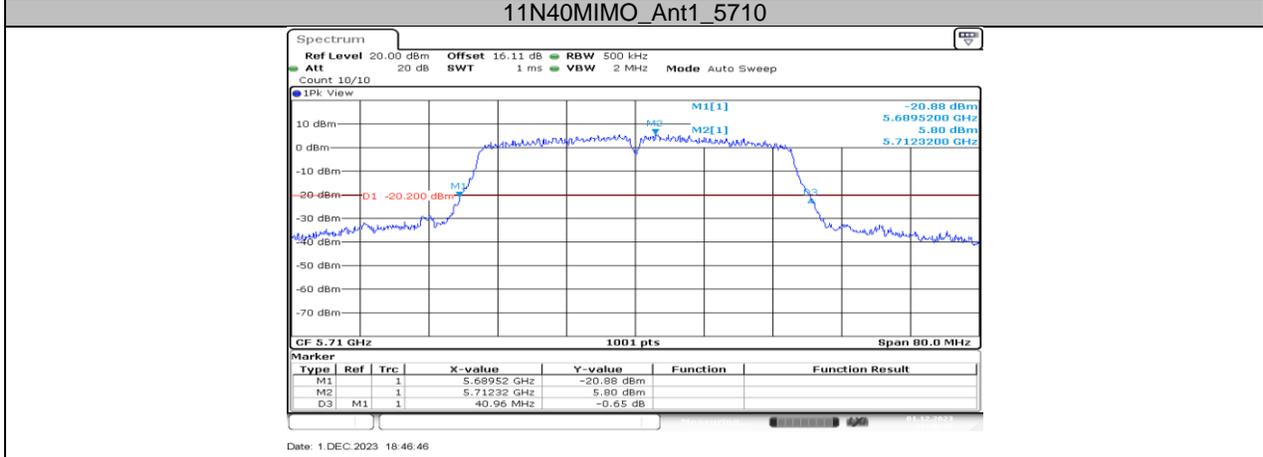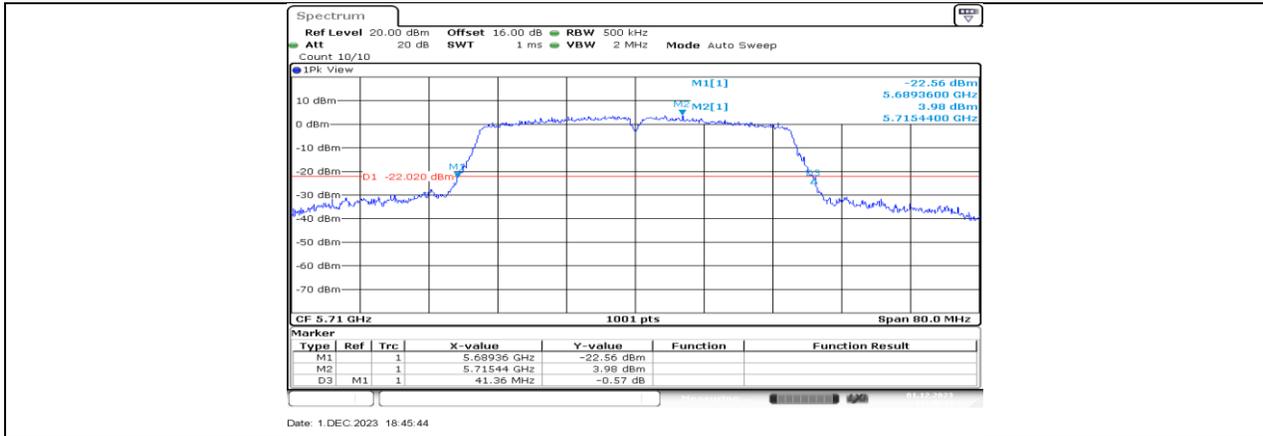


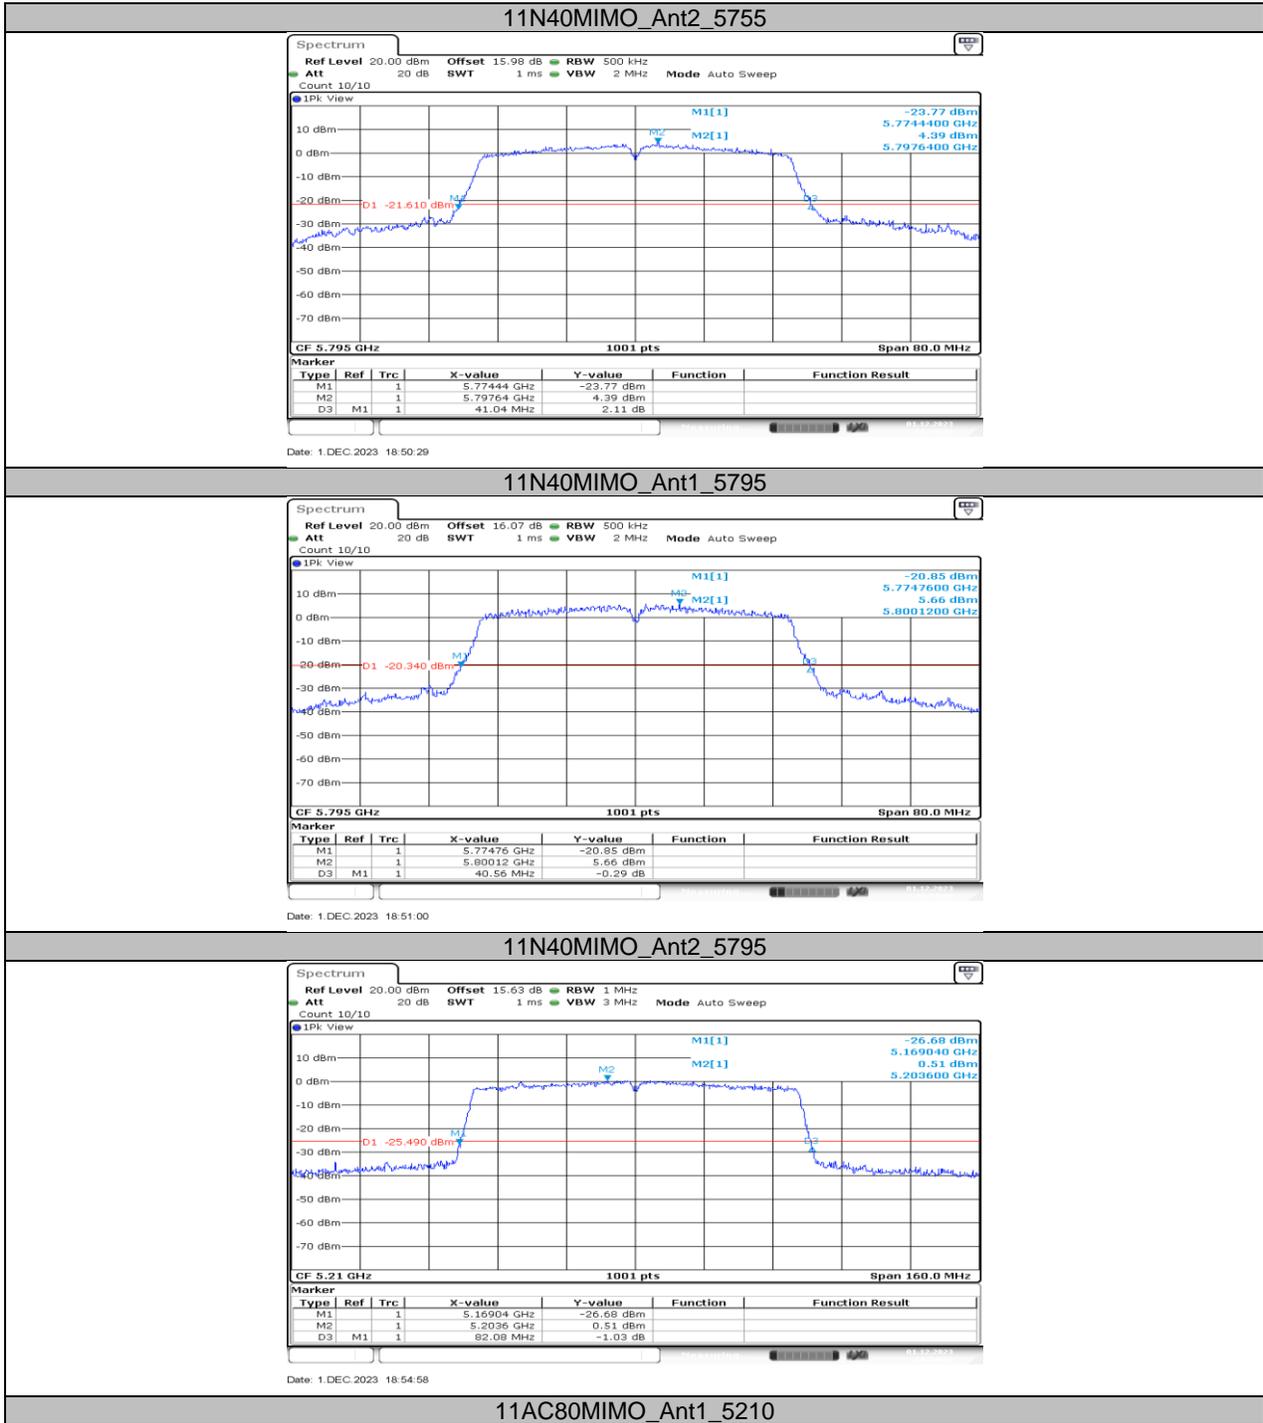


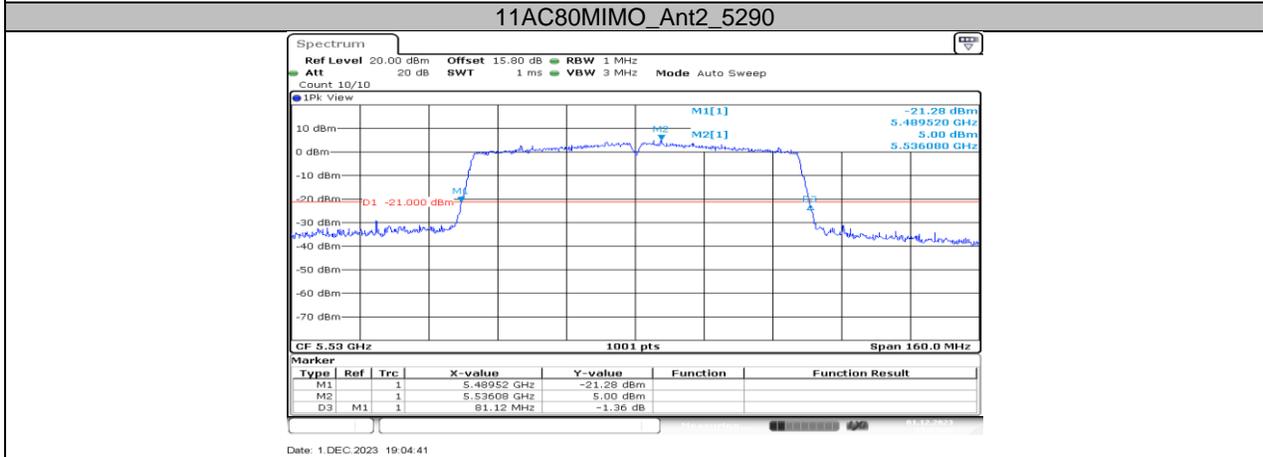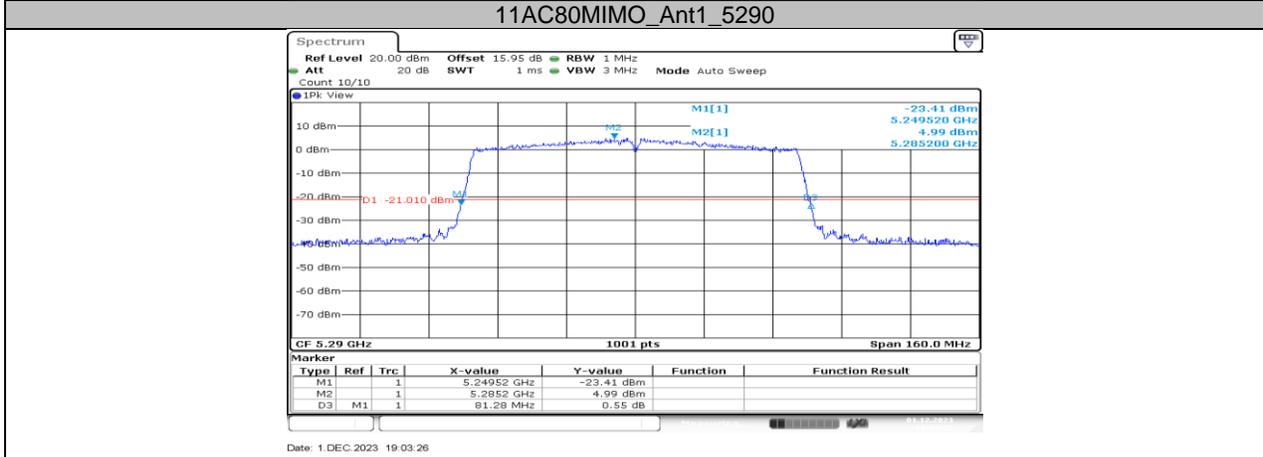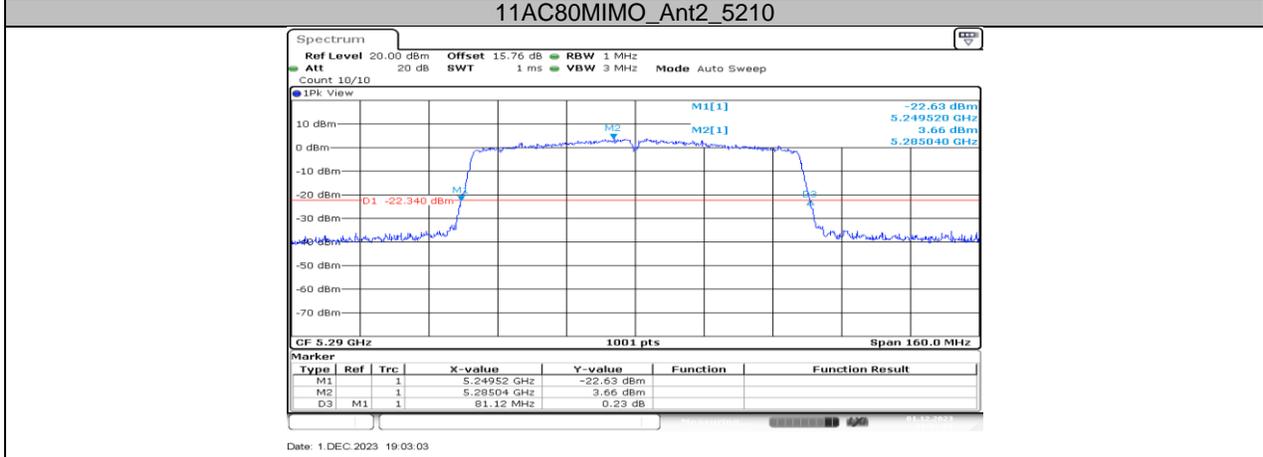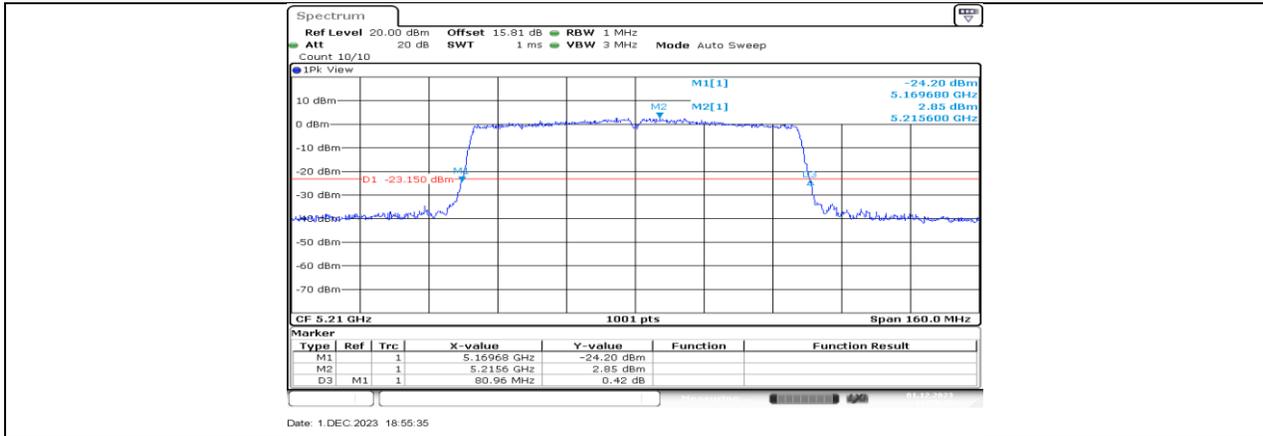

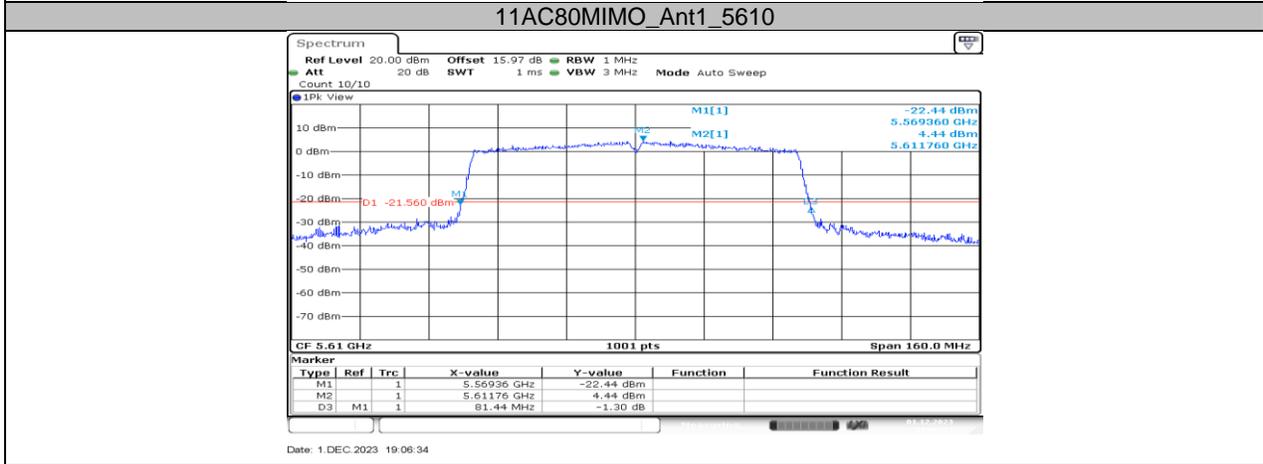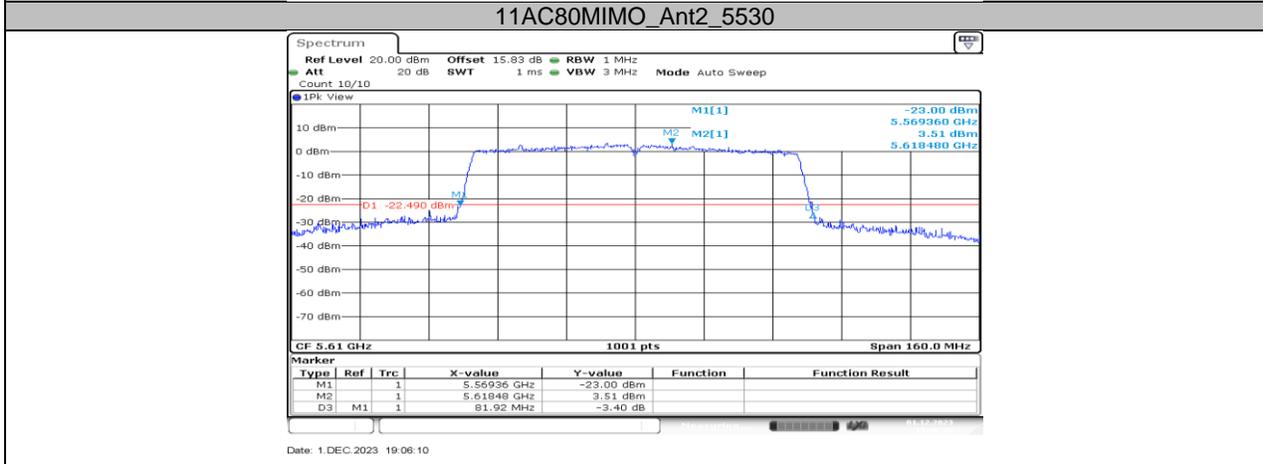

11AC80MIMO_Ant2_5610

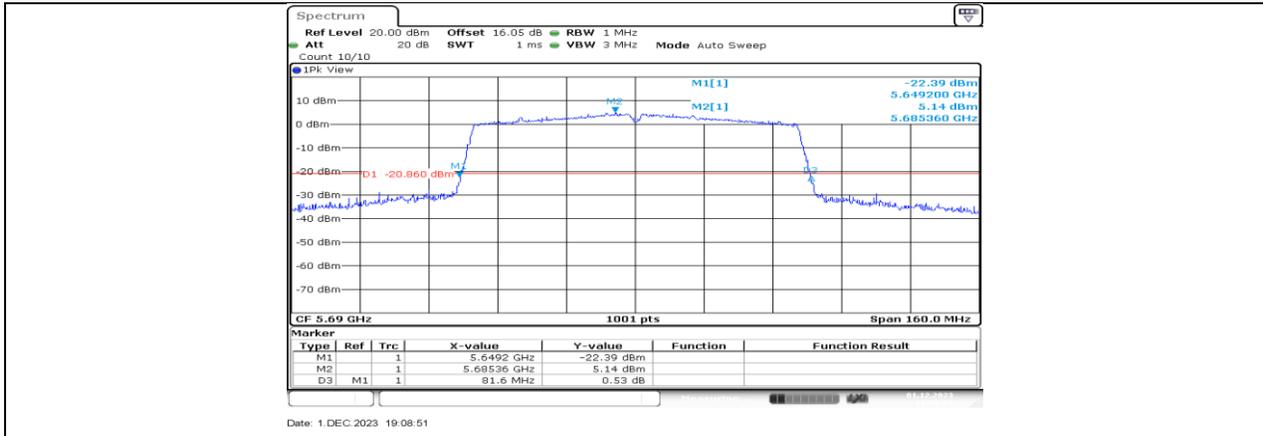

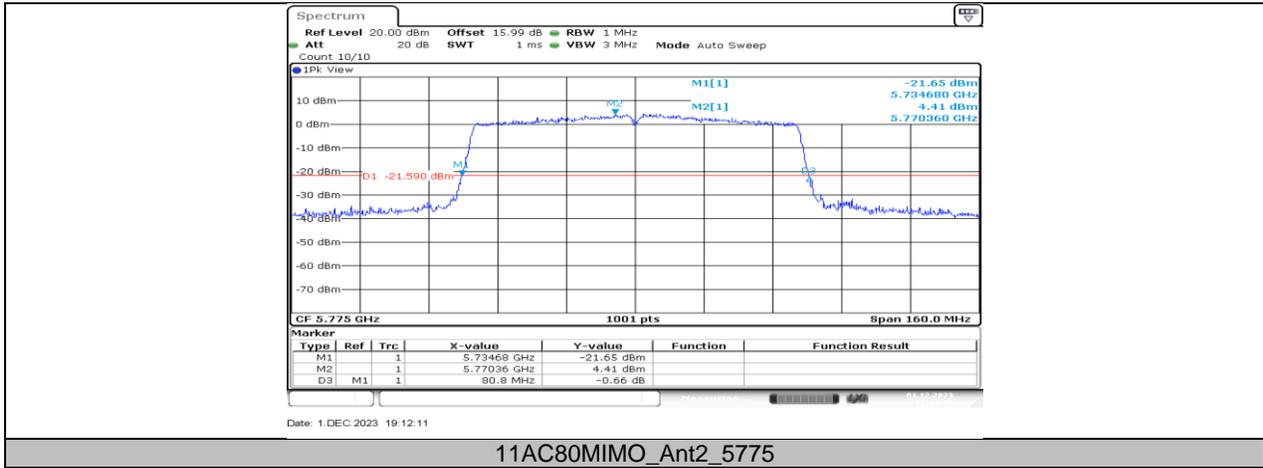


11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH


11.2.1. Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11A	Ant1	5180	17.183	5171.3287	5188.5115	PASS
	Ant2	5180	17.063	5171.4486	5188.5115	PASS
	Ant1	5200	17.702	5191.1289	5208.8312	PASS
	Ant2	5200	17.223	5191.3686	5208.5914	PASS
	Ant1	5240	17.423	5231.3287	5248.7512	PASS
	Ant2	5240	17.143	5231.4486	5248.5914	PASS
	Ant1	5260	17.303	5251.4086	5268.7113	PASS
	Ant2	5260	17.103	5251.4885	5268.5914	PASS
	Ant1	5280	17.263	5271.3686	5288.6314	PASS
	Ant2	5280	17.103	5271.4486	5288.5514	PASS
	Ant1	5320	17.183	5311.3686	5328.5514	PASS
	Ant2	5320	17.143	5311.4086	5328.5514	PASS
	Ant1	5500	17.183	5491.3686	5508.5514	PASS
	Ant2	5500	17.143	5491.4486	5508.5914	PASS
	Ant1	5580	17.223	5571.3686	5588.5914	PASS
	Ant2	5580	17.183	5571.3686	5588.5514	PASS
	Ant1	5700	17.263	5691.3287	5708.5914	PASS
	Ant2	5700	17.183	5691.4086	5708.5914	PASS
	Ant1	5720	17.183	5711.3686	5728.5514	PASS
	Ant2	5720	17.143	5711.4086	5728.5514	PASS
	Ant1	5720_UNII-2C	13.631	5711.3686	5725	PASS
	Ant2	5720_UNII-2C	13.591	5711.4086	5725	PASS
	Ant1	5720_UNII-3	3.551	5725	5728.5514	PASS
	Ant2	5720_UNII-3	3.551	5725	5728.5514	PASS
	Ant1	5745	17.183	5736.4086	5753.5914	PASS
	Ant2	5745	17.143	5736.4486	5753.5914	PASS
	Ant1	5785	17.183	5776.4086	5793.5914	PASS
	Ant2	5785	17.143	5776.4486	5793.5914	PASS
	Ant1	5825	17.263	5816.3686	5833.6314	PASS
	Ant2	5825	17.183	5816.3686	5833.5514	PASS
11N20MIMO	Ant1	5180	17.982	5170.9690	5188.9510	PASS
	Ant2	5180	17.782	5171.0889	5188.8711	PASS
	Ant1	5200	18.102	5190.9291	5209.0310	PASS
	Ant2	5200	17.782	5191.0889	5208.8711	PASS
	Ant1	5240	18.102	5230.9690	5249.0709	PASS
	Ant2	5240	17.742	5231.1289	5248.8711	PASS
	Ant1	5260	18.022	5251.0090	5269.0310	PASS
	Ant2	5260	17.822	5251.0889	5268.9111	PASS
	Ant1	5280	18.142	5270.9291	5289.0709	PASS
	Ant2	5280	17.822	5271.0889	5288.9111	PASS
	Ant1	5320	18.062	5310.9690	5329.0310	PASS
	Ant2	5320	17.782	5311.0889	5328.8711	PASS
	Ant1	5500	18.022	5491.0090	5509.0310	PASS
	Ant2	5500	17.782	5491.1289	5508.9111	PASS
	Ant1	5580	18.102	5570.9291	5589.0310	PASS
	Ant2	5580	17.782	5571.0889	5588.8711	PASS
	Ant1	5700	18.022	5690.9690	5708.9910	PASS
	Ant2	5700	17.822	5691.0889	5708.9111	PASS
	Ant1	5720	18.022	5710.9690	5728.9910	PASS
	Ant2	5720	17.782	5711.0889	5728.8711	PASS
	Ant1	5720_UNII-2C	14.031	5710.9690	5725	PASS
	Ant2	5720_UNII-2C	13.911	5711.0889	5725	PASS
	Ant1	5720_UNII-3	3.991	5725	5728.9910	PASS
	Ant2	5720_UNII-3	3.871	5725	5728.8711	PASS
	Ant1	5745	18.062	5735.9690	5754.0310	PASS
	Ant2	5745	17.822	5736.0889	5753.9111	PASS


	Ant1	5785	18.062	5775.9690	5794.0310	PASS	
	Ant2	5785	17.822	5776.0889	5793.9111	PASS	
	Ant1	5825	18.062	5815.9690	5834.0310	PASS	
	Ant2	5825	17.822	5816.0889	5833.9111	PASS	
11N40MIMO	Ant1	5190	36.284	5171.7782	5208.0619	PASS	
	Ant2	5190	36.284	5171.8581	5208.1419	PASS	
	Ant1	5230	36.843	5211.6184	5248.4615	PASS	
	Ant2	5230	36.284	5211.9381	5248.2218	PASS	
	Ant1	5270	36.523	5251.8581	5288.3816	PASS	
	Ant2	5270	36.204	5251.9381	5288.1419	PASS	
	Ant1	5310	36.364	5291.7782	5328.1419	PASS	
	Ant2	5310	36.364	5291.8581	5328.2218	PASS	
	Ant1	5510	36.444	5491.7782	5528.2218	PASS	
	Ant2	5510	36.523	5491.7782	5528.3017	PASS	
	Ant1	5550	36.523	5531.7782	5568.3017	PASS	
	Ant2	5550	36.444	5531.7782	5568.2218	PASS	
	Ant1	5670	36.284	5651.9381	5688.2218	PASS	
	Ant2	5670	36.364	5651.8581	5688.2218	PASS	
	Ant1	5710	36.523	5691.6983	5728.2218	PASS	
	Ant2	5710	36.364	5691.8581	5728.2218	PASS	
		Ant1	5710_UNII-2C	33.302	5691.6983	5725	PASS
		Ant2	5710_UNII-2C	33.142	5691.8581	5725	PASS
		Ant1	5710_UNII-3	3.222	5725	5728.2218	PASS
		Ant2	5710_UNII-3	3.222	5725	5728.2218	PASS
		Ant1	5755	36.523	5736.8581	5773.3816	PASS
		Ant2	5755	36.444	5736.8581	5773.3017	PASS
		Ant1	5795	36.444	5776.8581	5813.3017	PASS
		Ant2	5795	36.364	5776.8581	5813.2218	PASS
11AC80MIMO	Ant1	5210	75.764	5172.1179	5247.8821	PASS	
	Ant2	5210	75.764	5172.2777	5248.0420	PASS	
	Ant1	5290	75.604	5252.2777	5327.8821	PASS	
	Ant2	5290	75.285	5252.4376	5327.7223	PASS	
	Ant1	5530	75.604	5492.2777	5567.8821	PASS	
	Ant2	5530	75.445	5492.2777	5567.7223	PASS	
	Ant1	5610	75.924	5571.9580	5647.8821	PASS	
	Ant2	5610	75.604	5572.2777	5647.8821	PASS	
	Ant1	5690	75.445	5652.2777	5727.7223	PASS	
	Ant2	5690	75.445	5652.2777	5727.7223	PASS	
		Ant1	5690_UNII-2C	72.722	5652.2777	5725	PASS
		Ant2	5690_UNII-2C	72.722	5652.2777	5725	PASS
		Ant1	5690_UNII-3	2.722	5725	5727.7223	PASS
		Ant2	5690_UNII-3	2.722	5725	5727.7223	PASS
		Ant1	5775	75.445	5737.4376	5812.8821	PASS
		Ant2	5775	75.604	5737.2777	5812.8821	PASS

11.2.2. Test Graphs

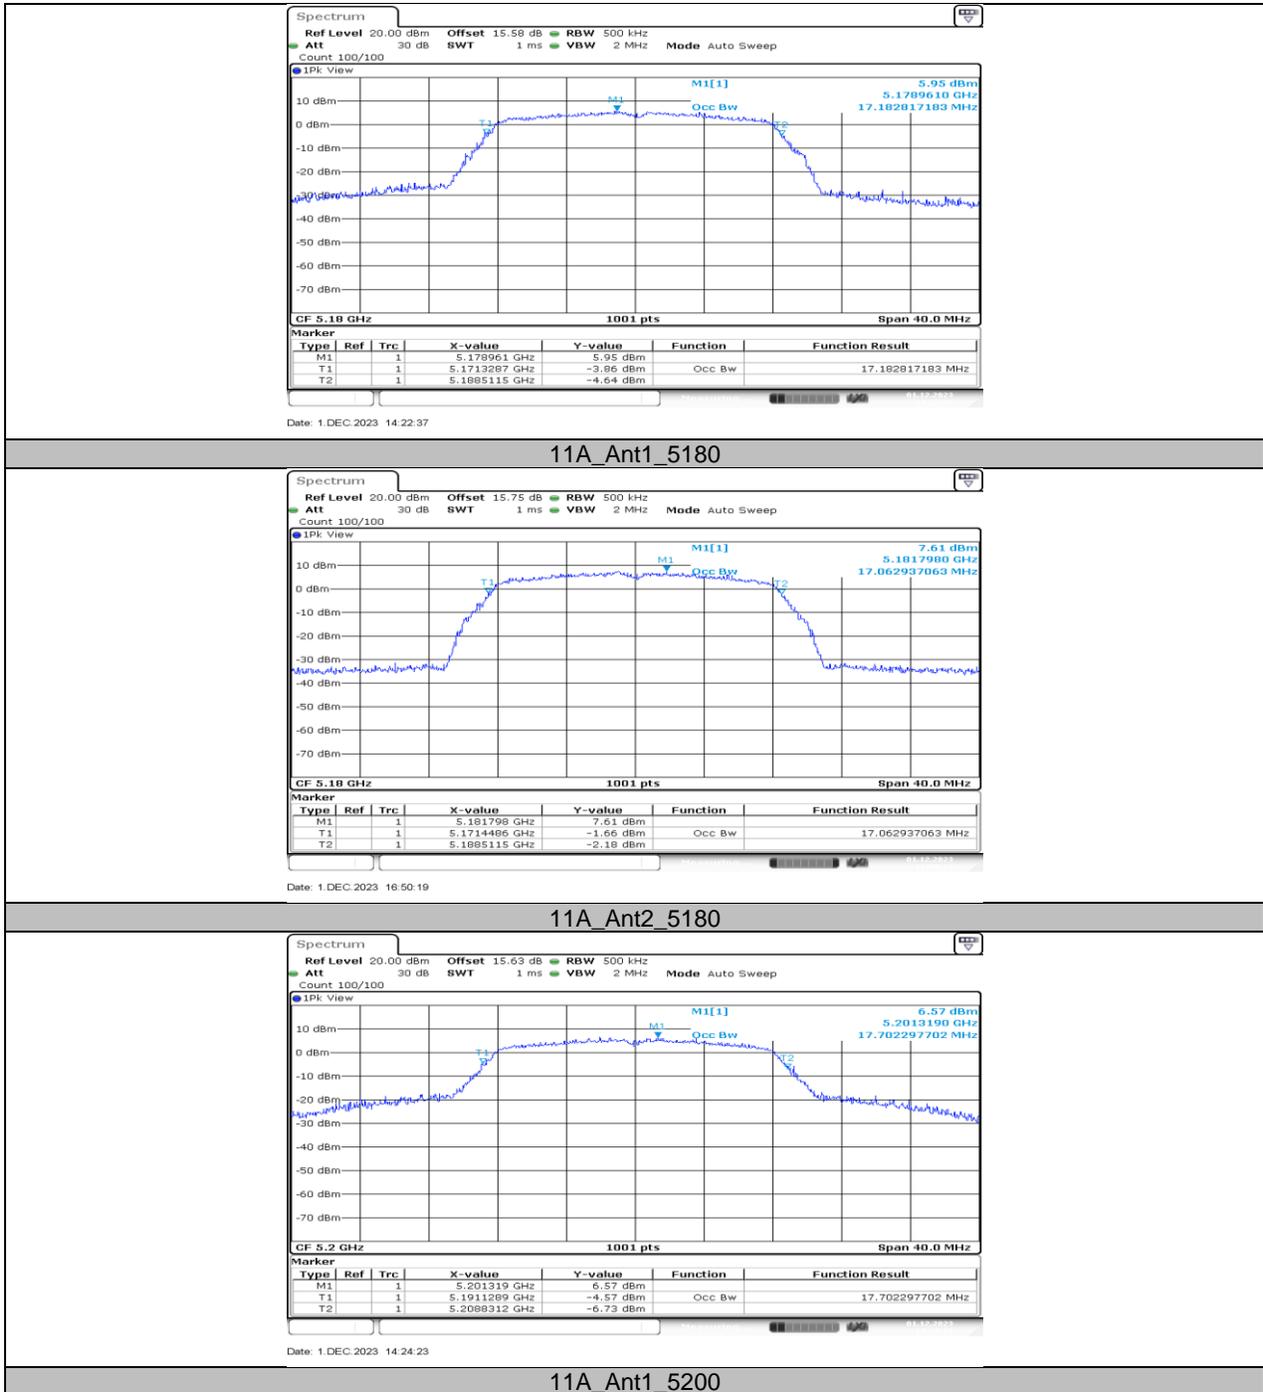


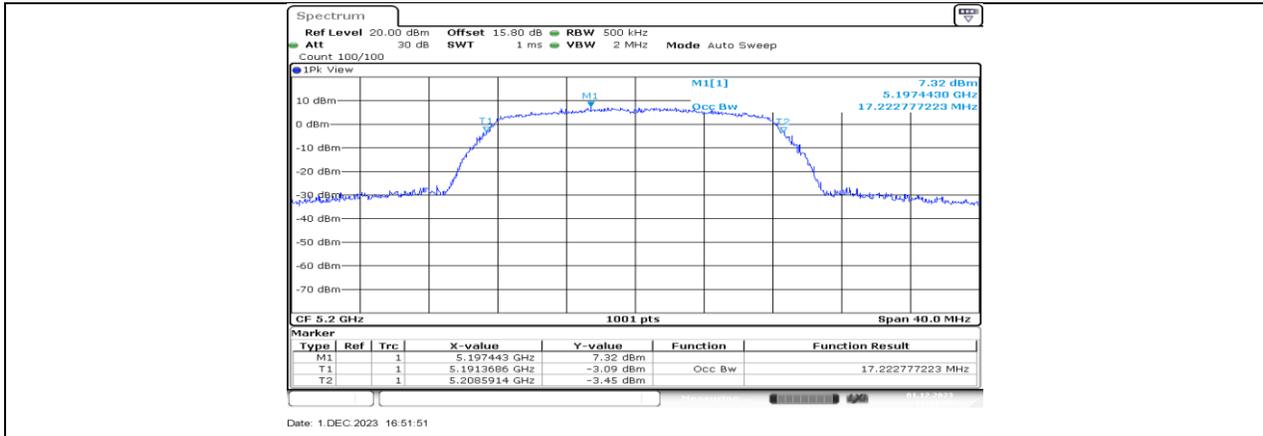


11A_Ant2_5200

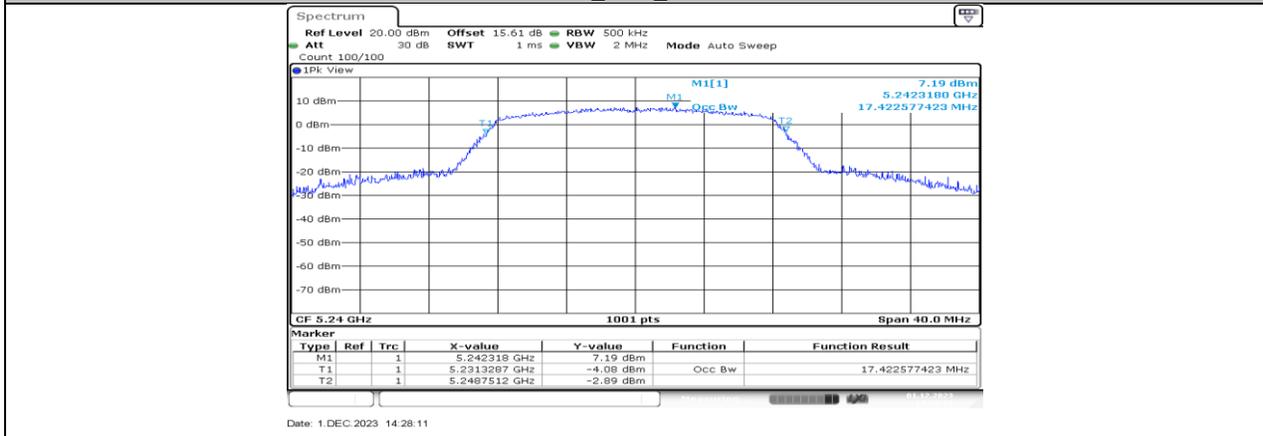



11A_Ant1_5240

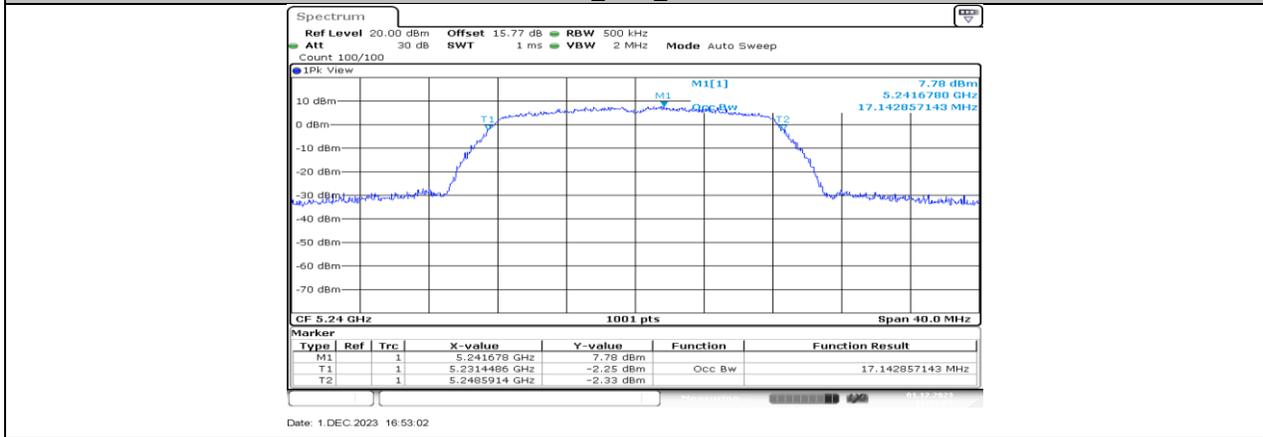

11A_Ant2_5240

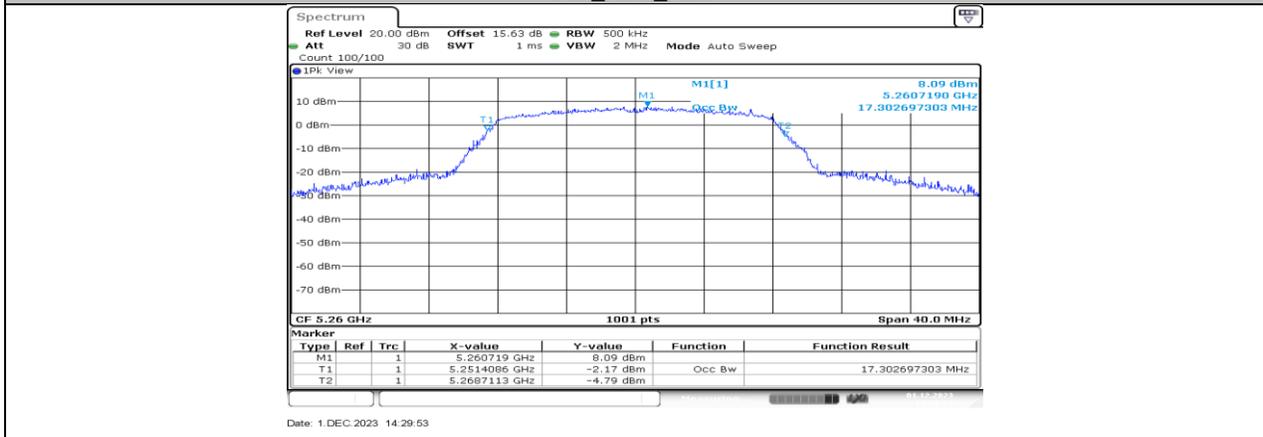

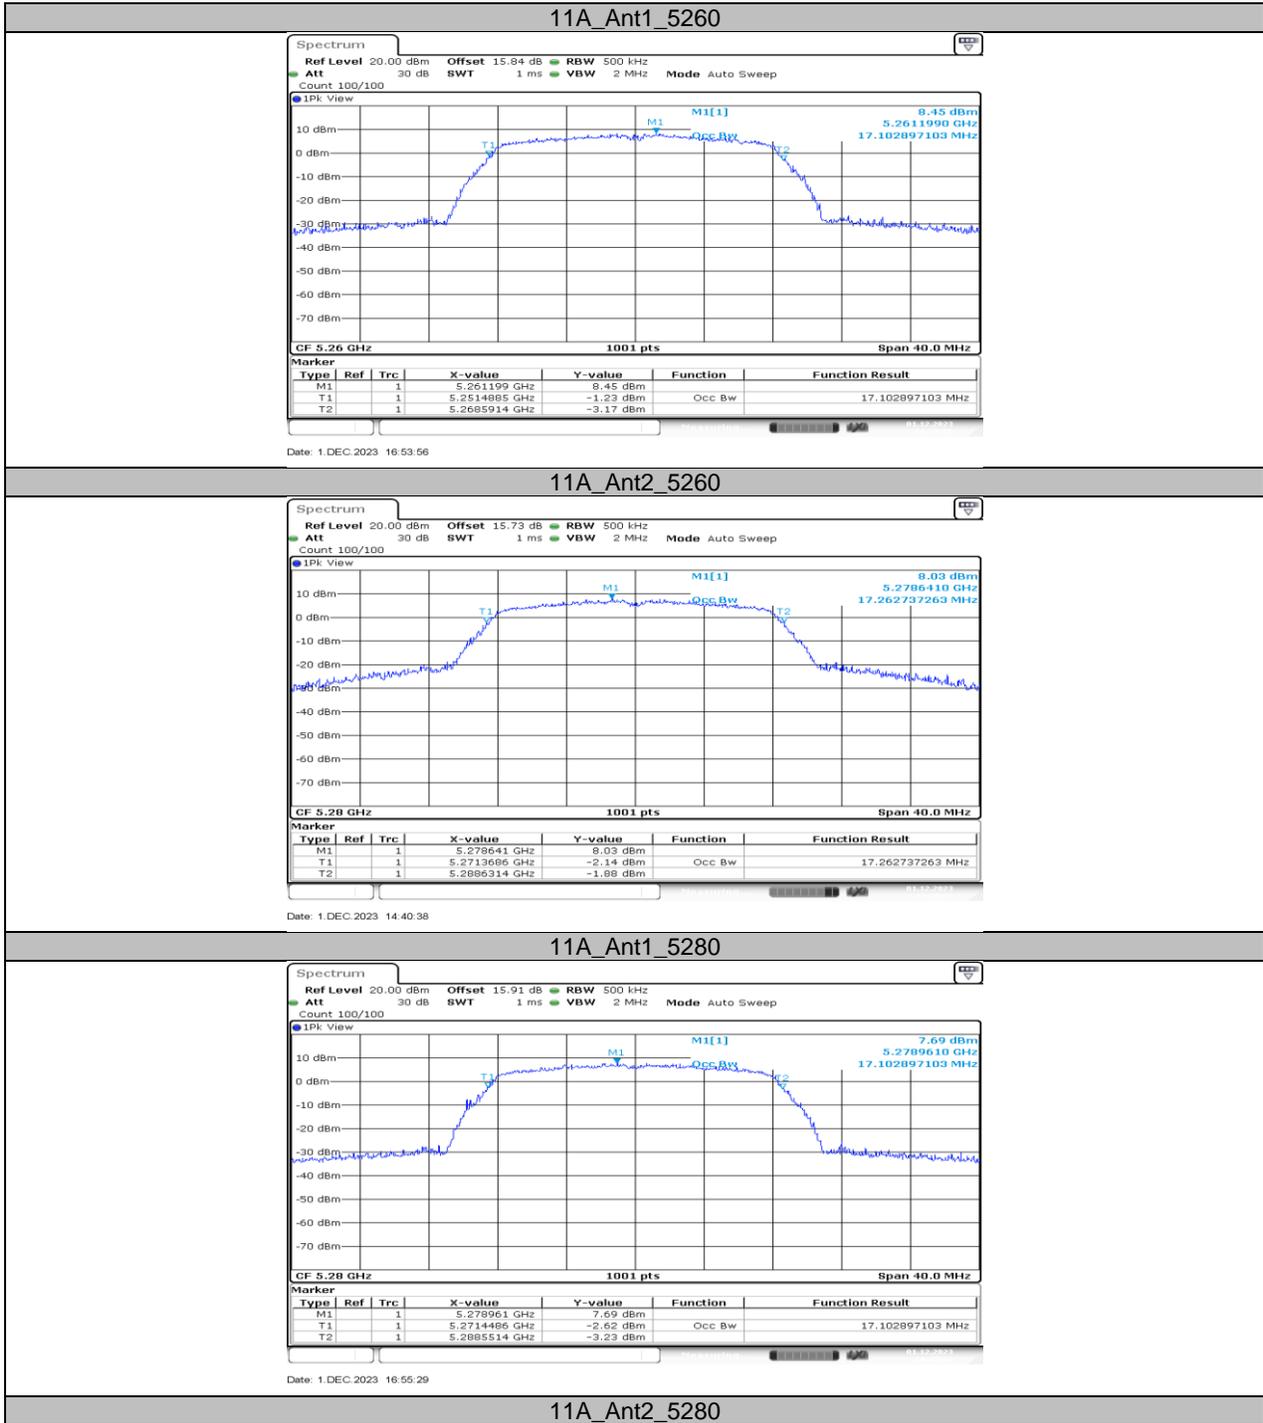


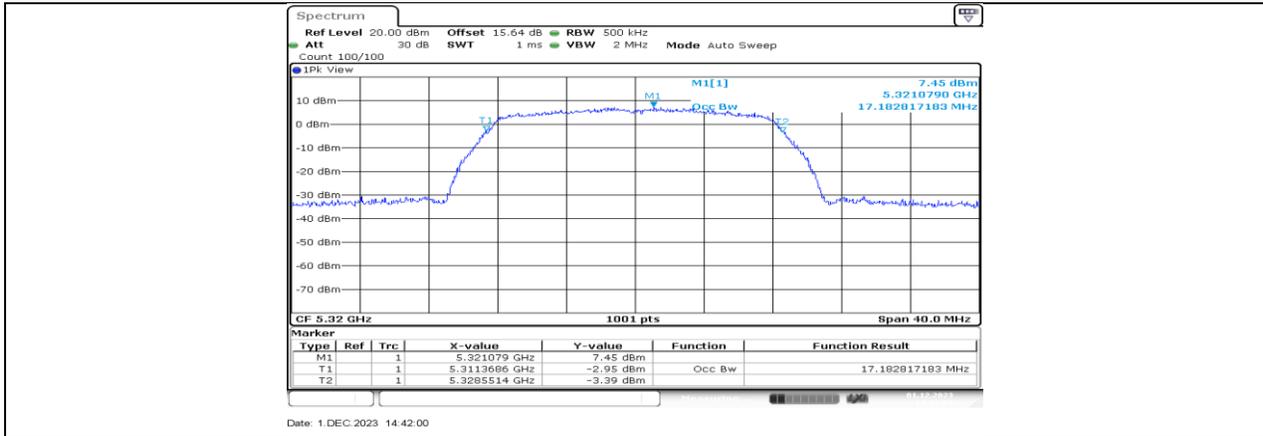


Date: 1.DEC 2023 14:42:00






Date: 1.DEC 2023 16:58:04

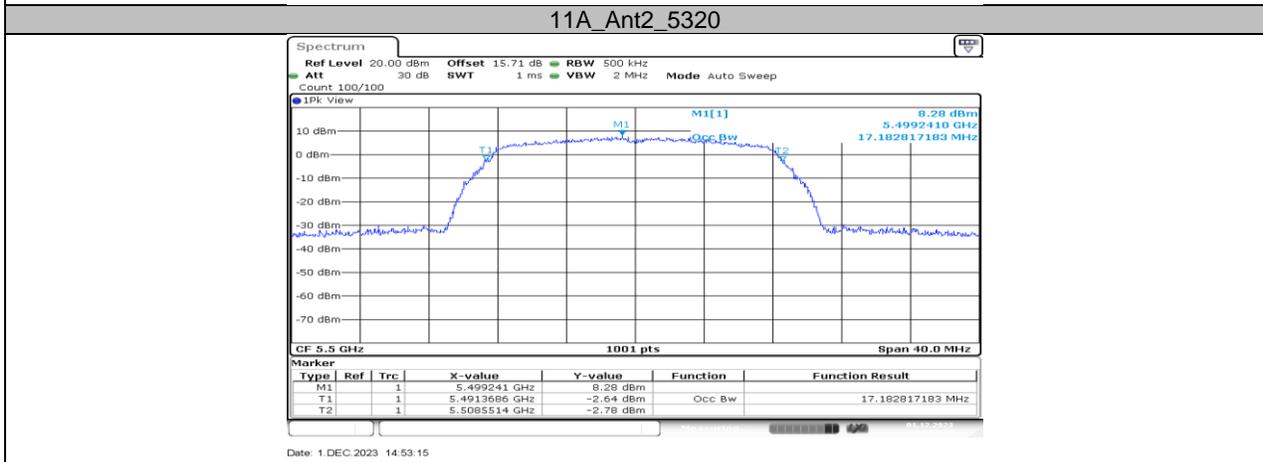


Date: 1.DEC 2023 14:53:15

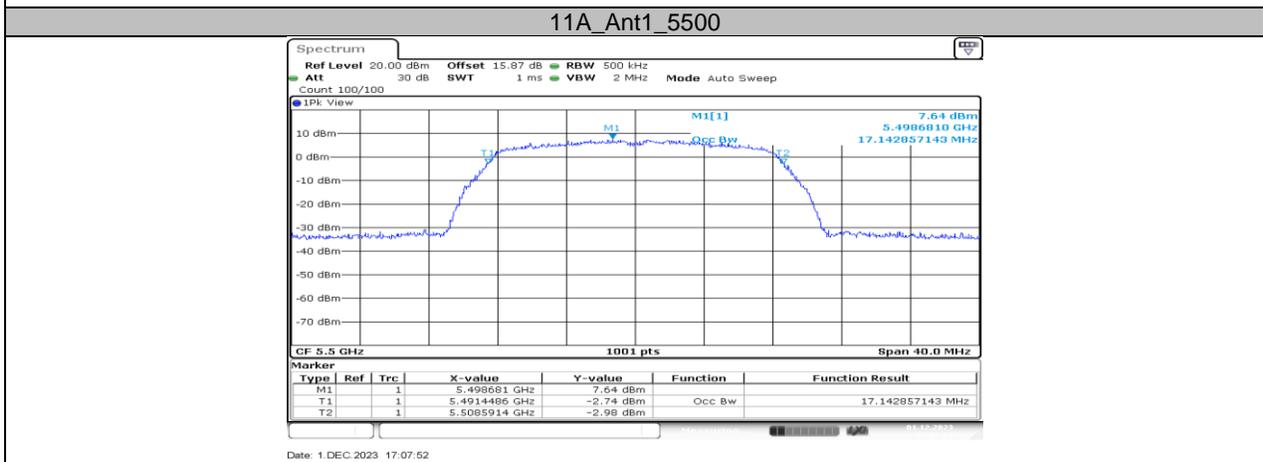


Date: 1.DEC 2023 17:07:52

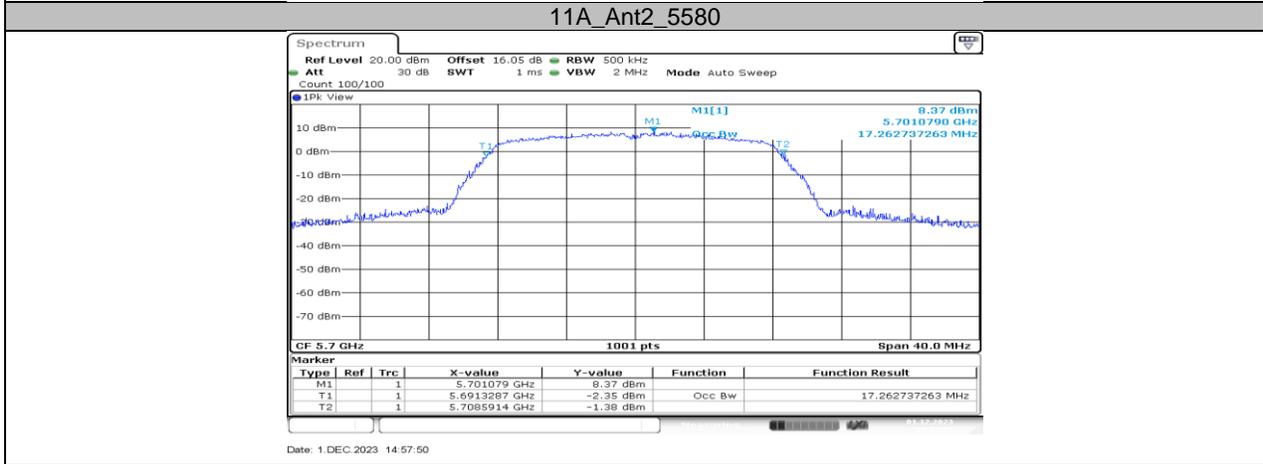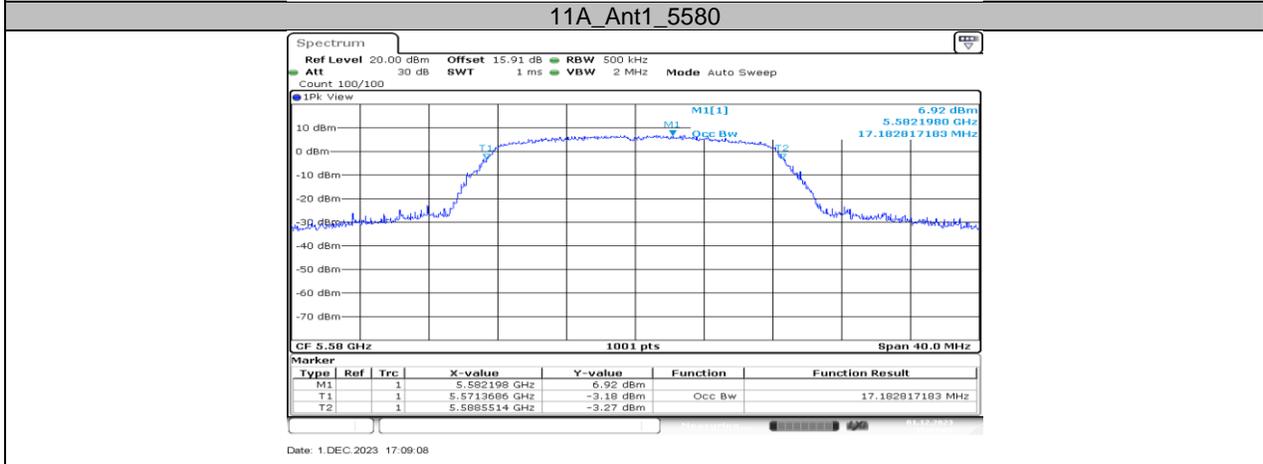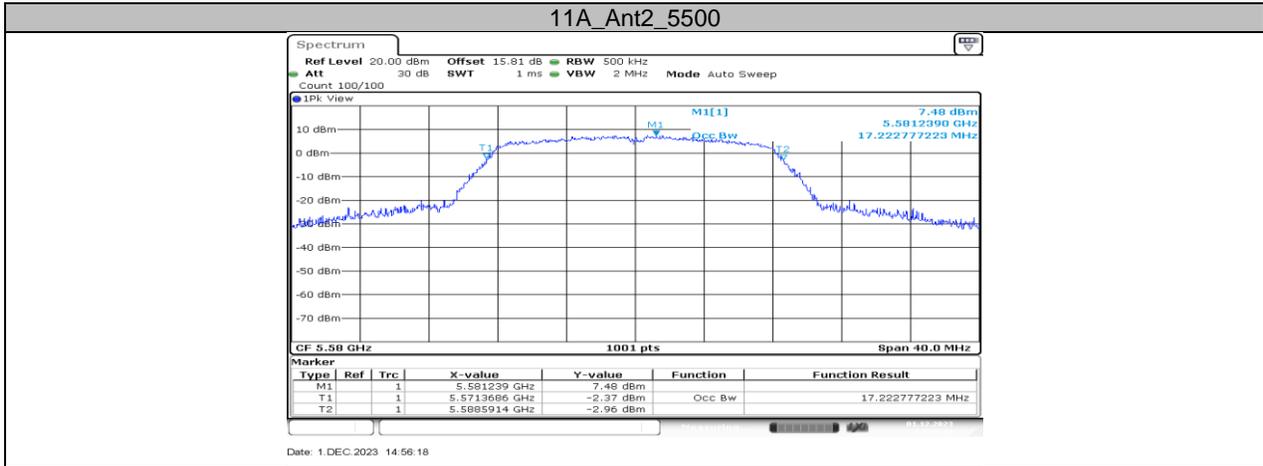


11A_Ant1_5700

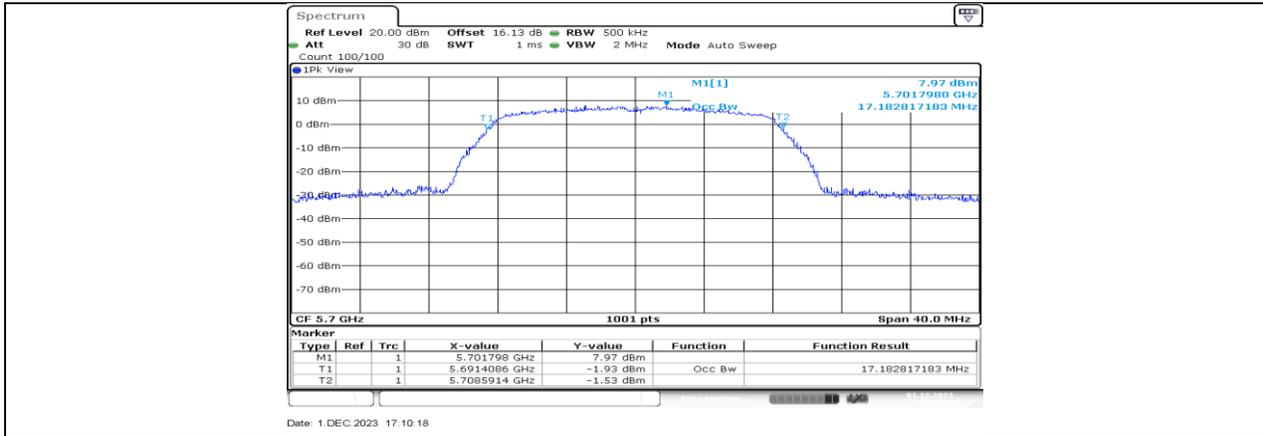


11A_Ant2_5700


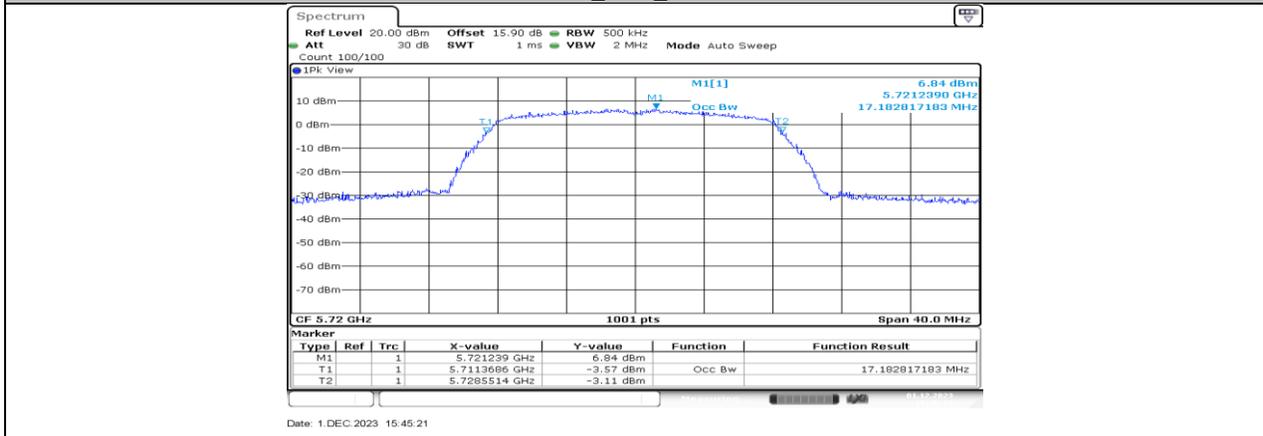


11A_Ant1_5720

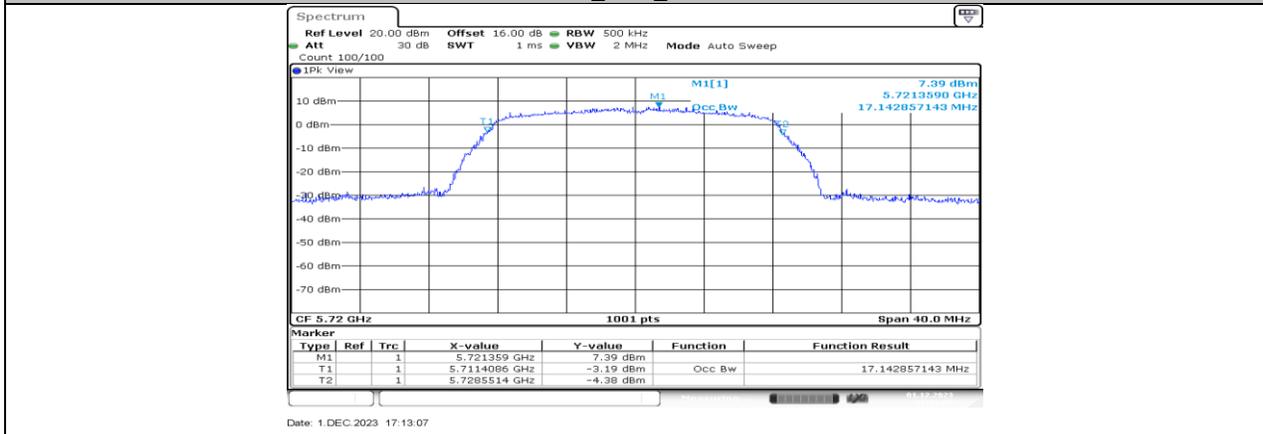


11A_Ant2_5720

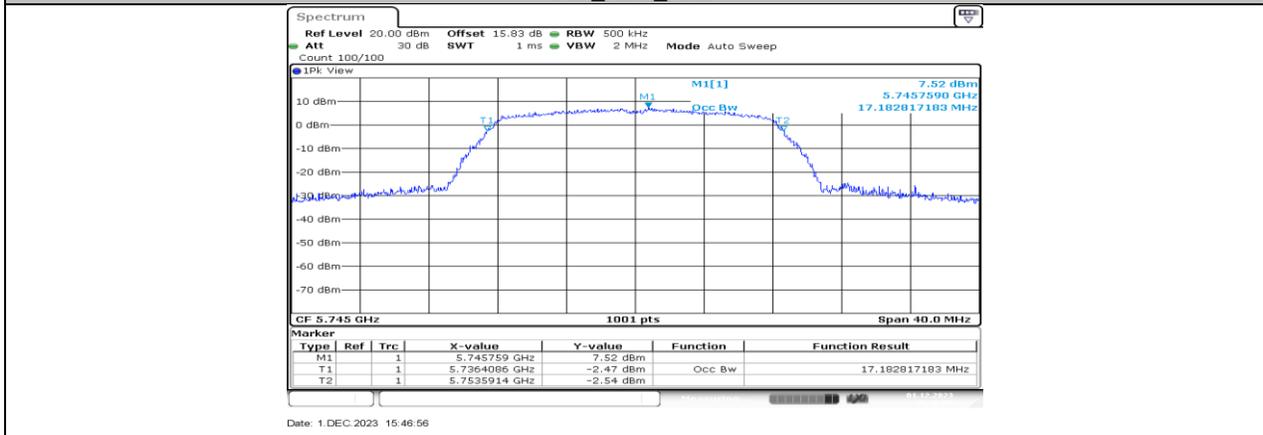


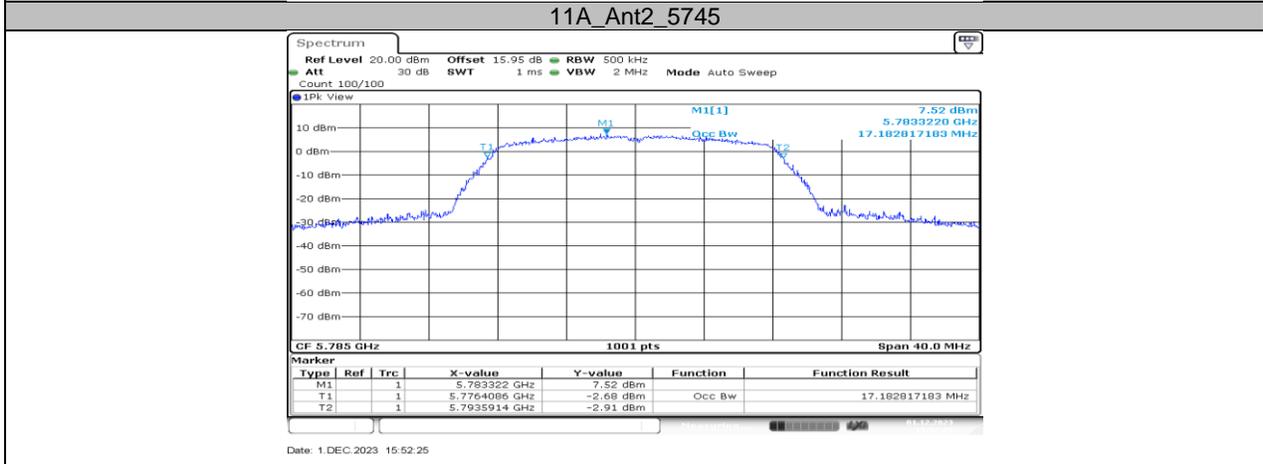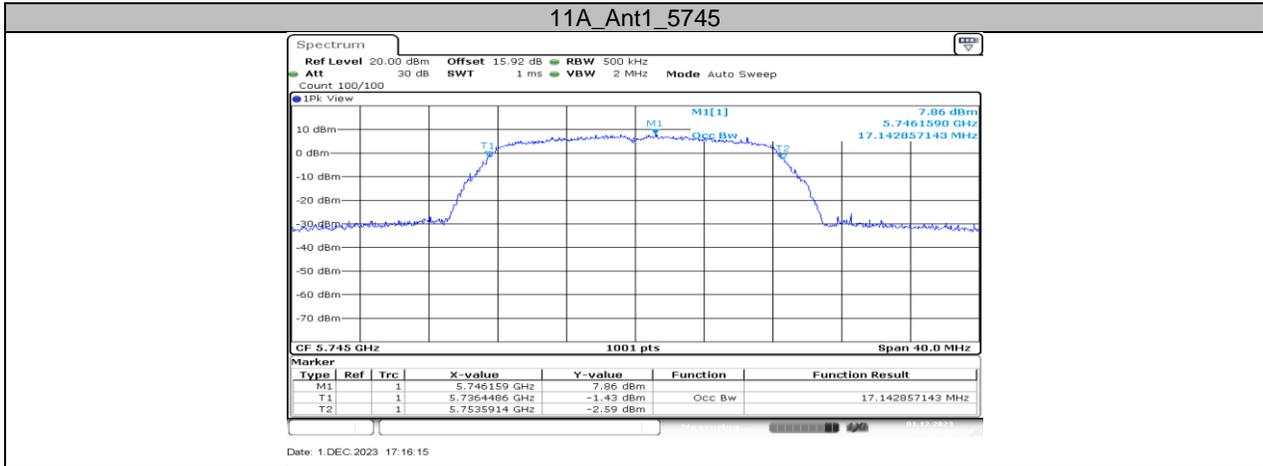


11A_Ant2_5785

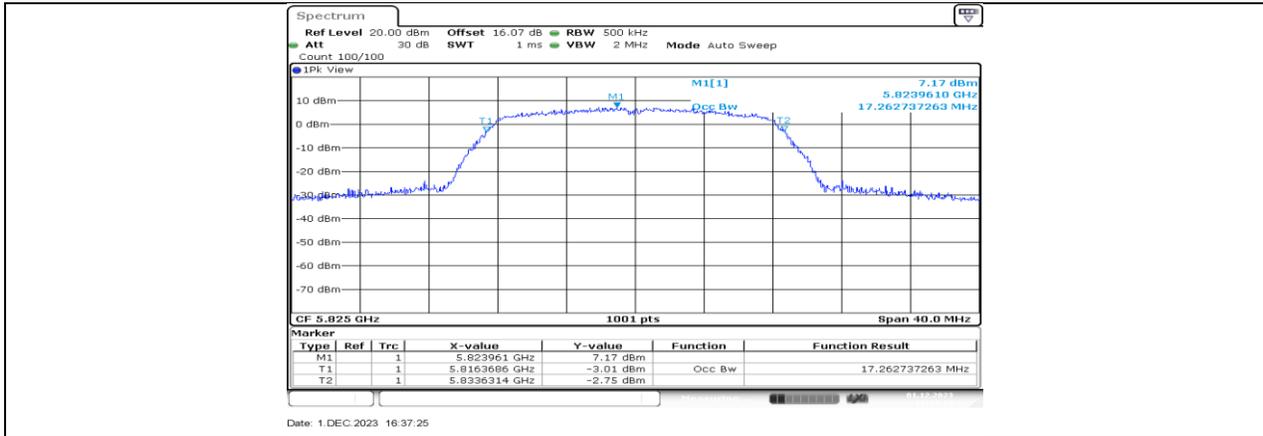


11A_Ant1_5825

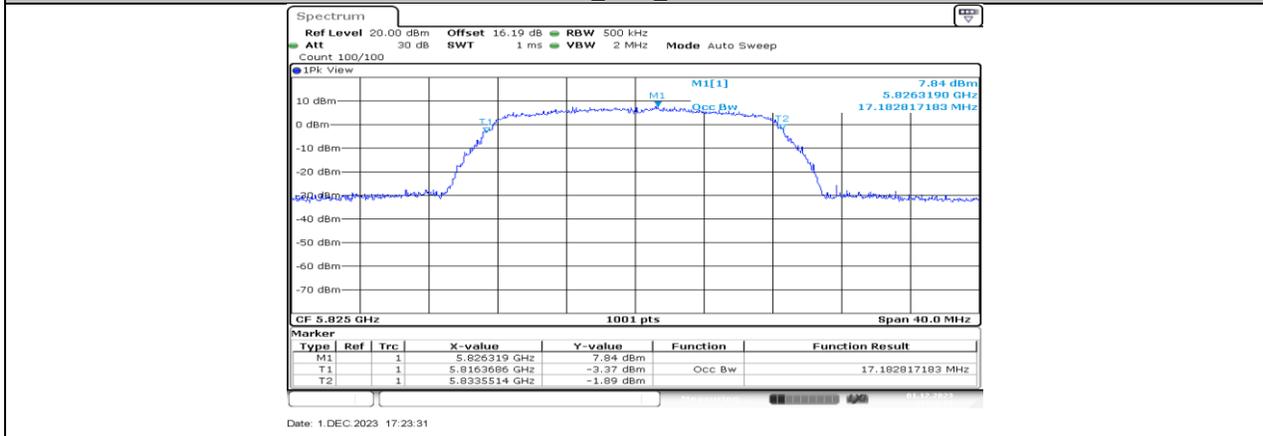


11A_Ant2_5825

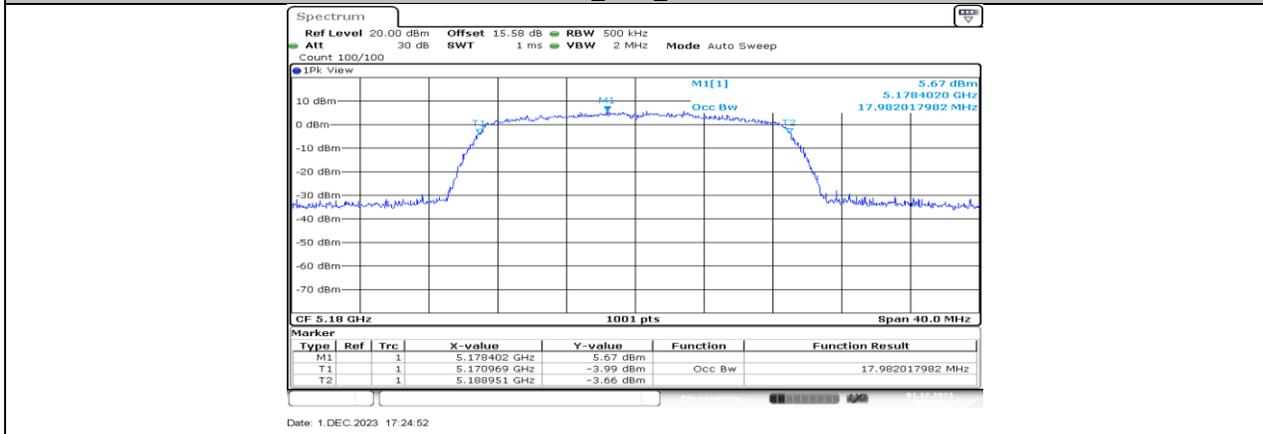


11N20MIMO_Ant1_5180

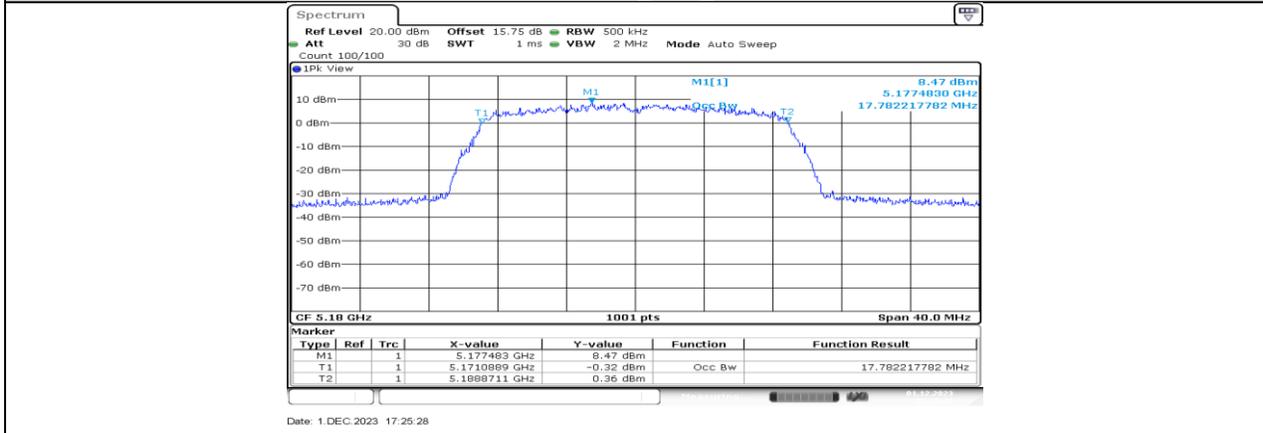


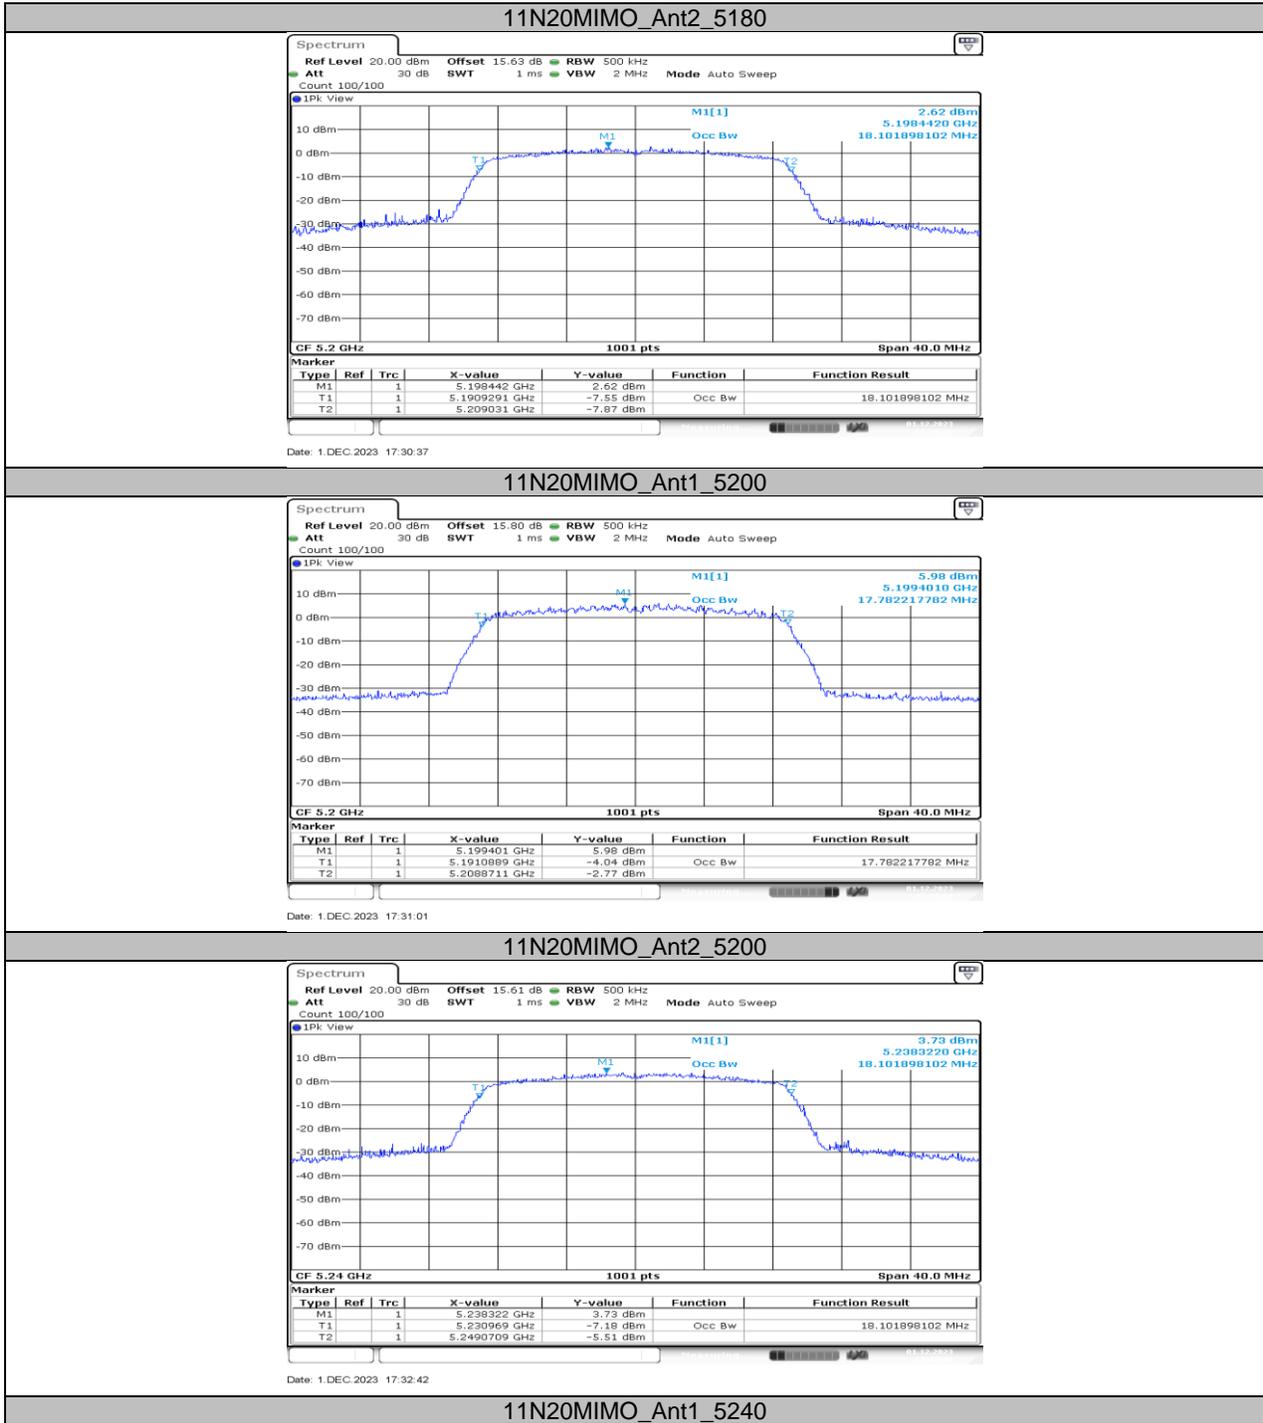


11N20MIMO_Ant1_5240

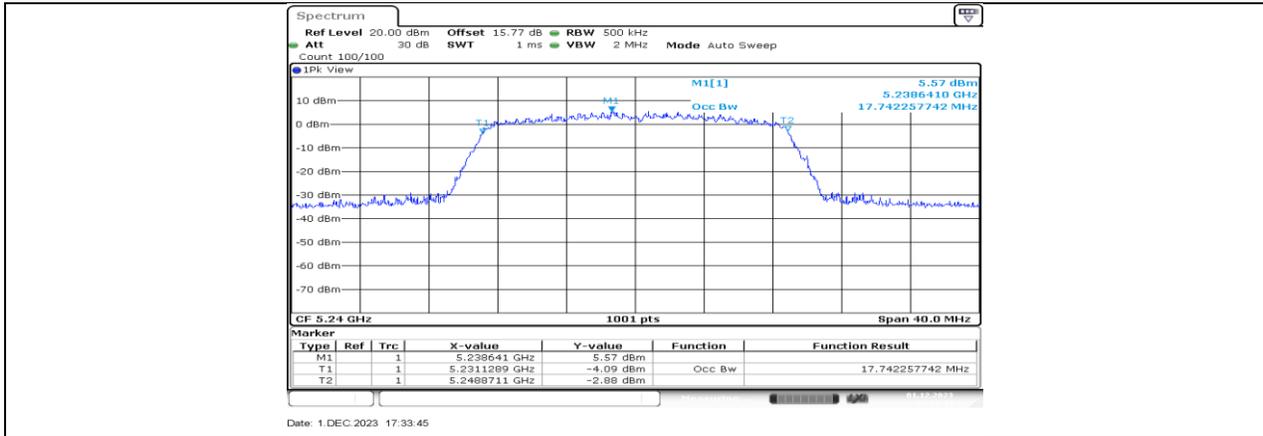

Date: 1.DEC.2023 17:33:45

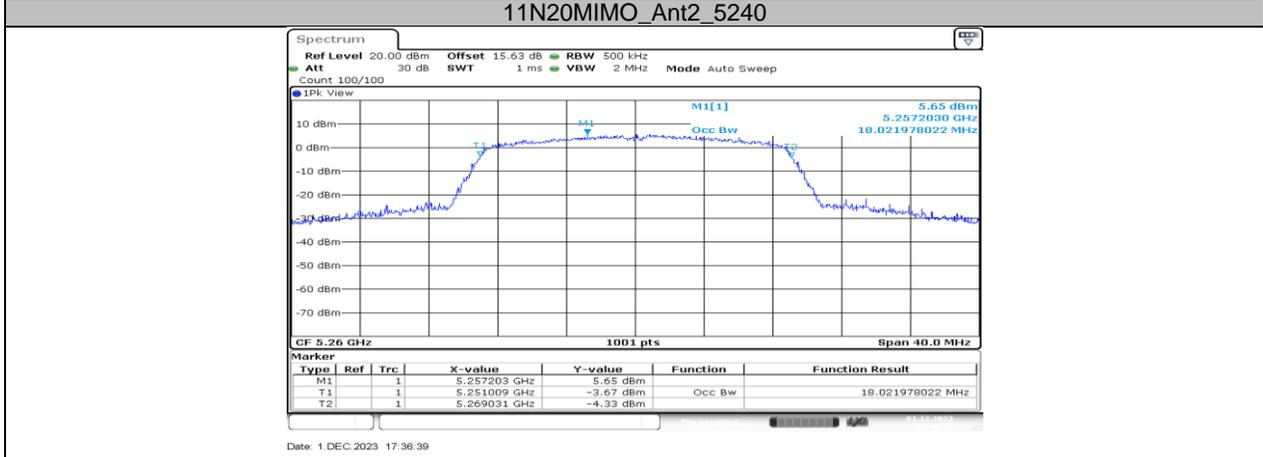


Date: 1.DEC.2023 17:36:39

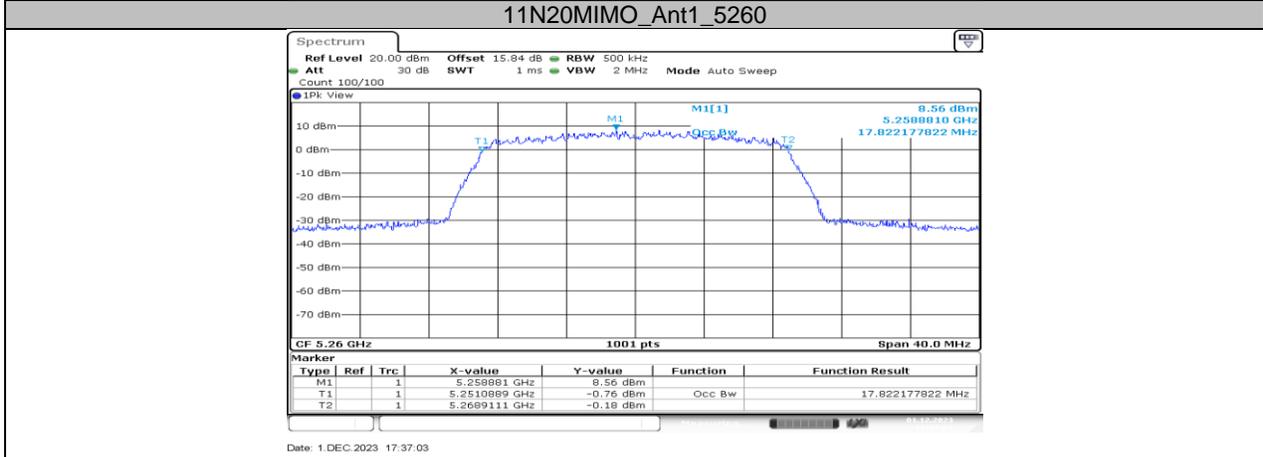


Date: 1.DEC.2023 17:37:03




Date: 1.DEC.2023 17:39:58

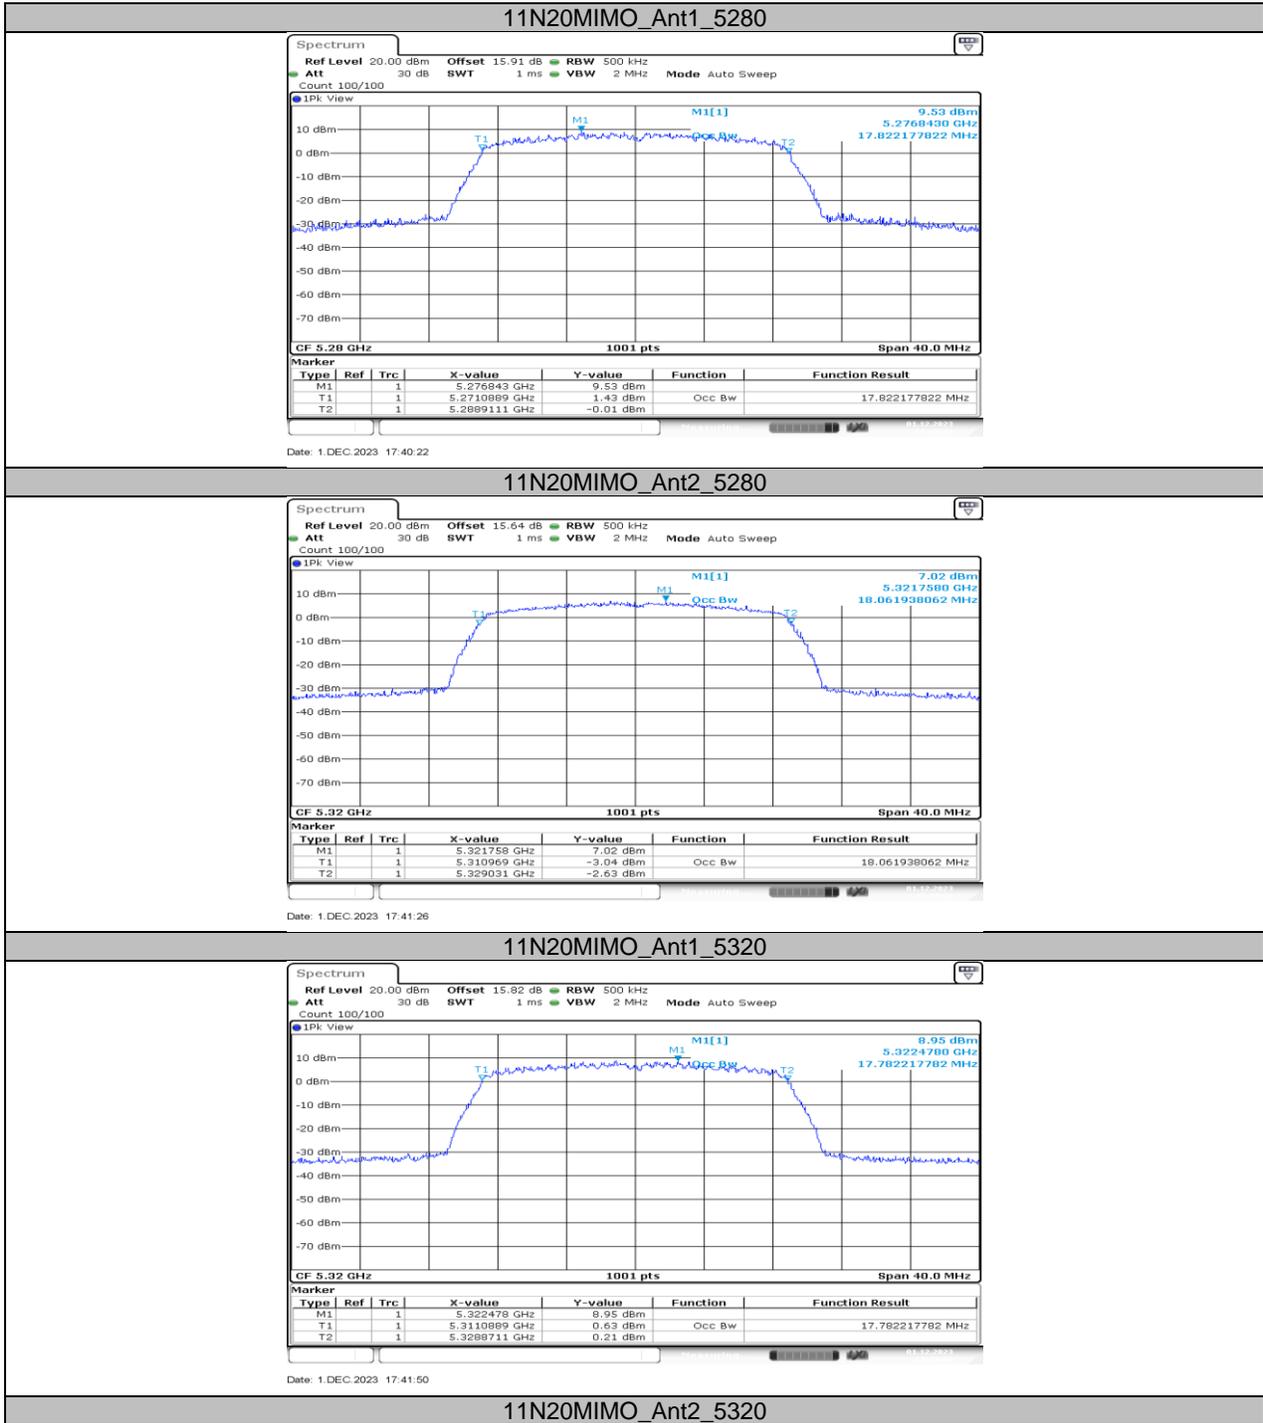

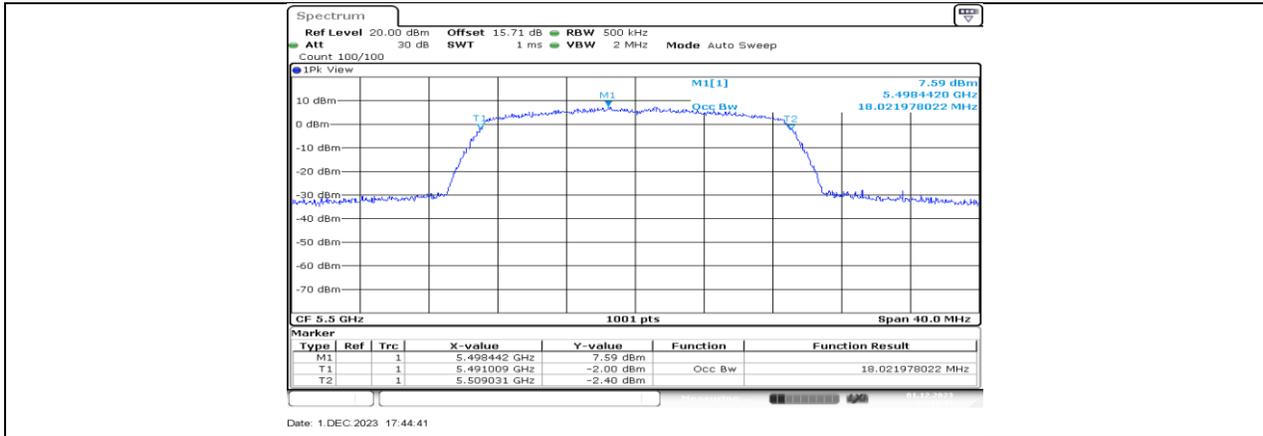


Date: 1.DEC 2023 17:44:41

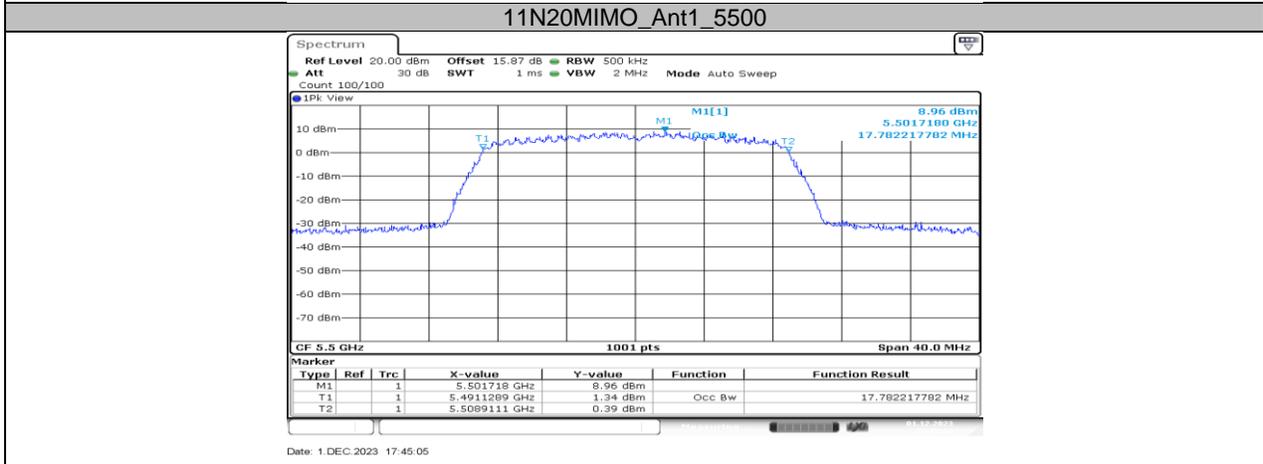




Date: 1.DEC 2023 17:45:05






Date: 1.DEC 2023 17:46:05

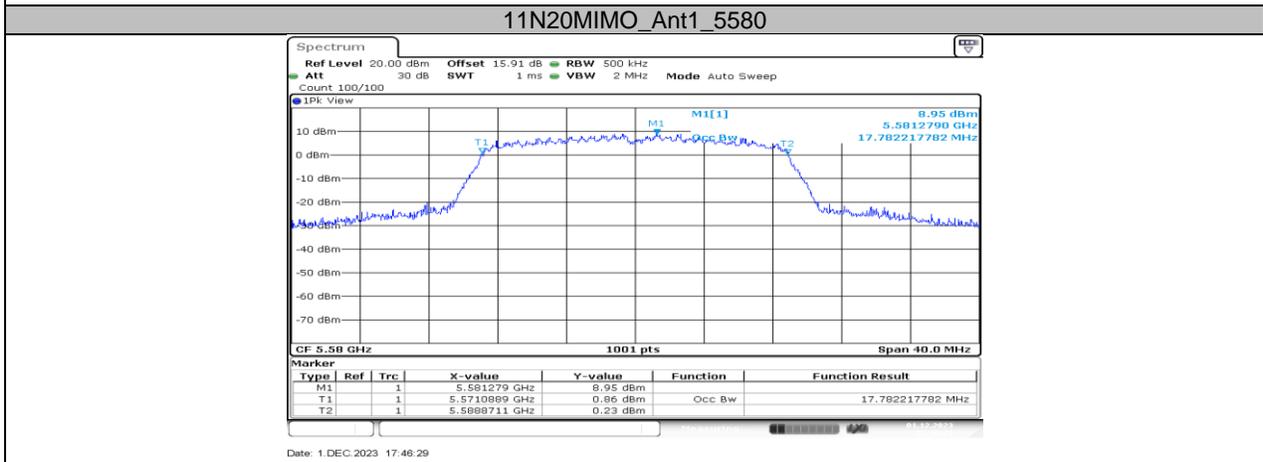






Date: 1.DEC 2023 17:46:29

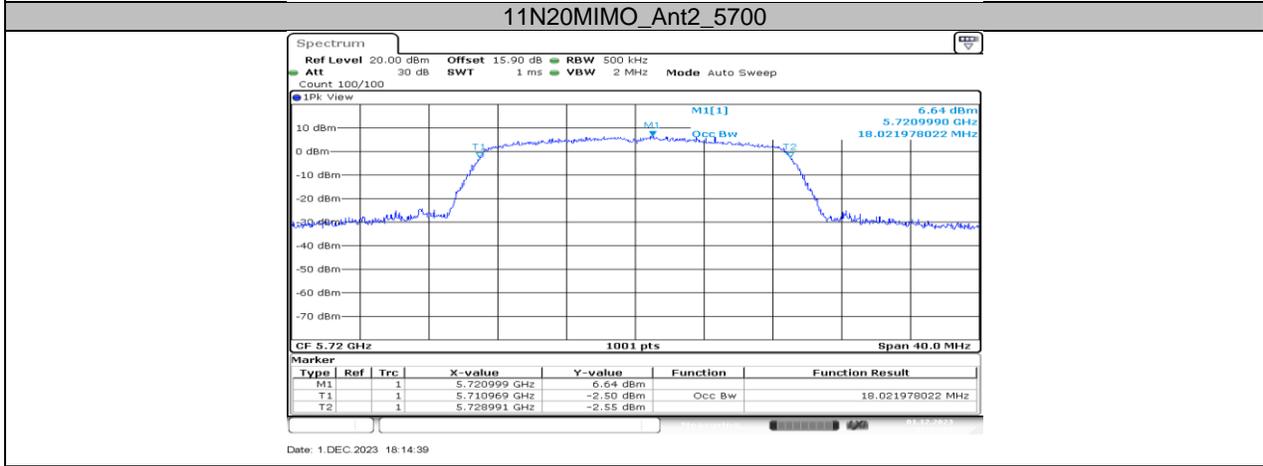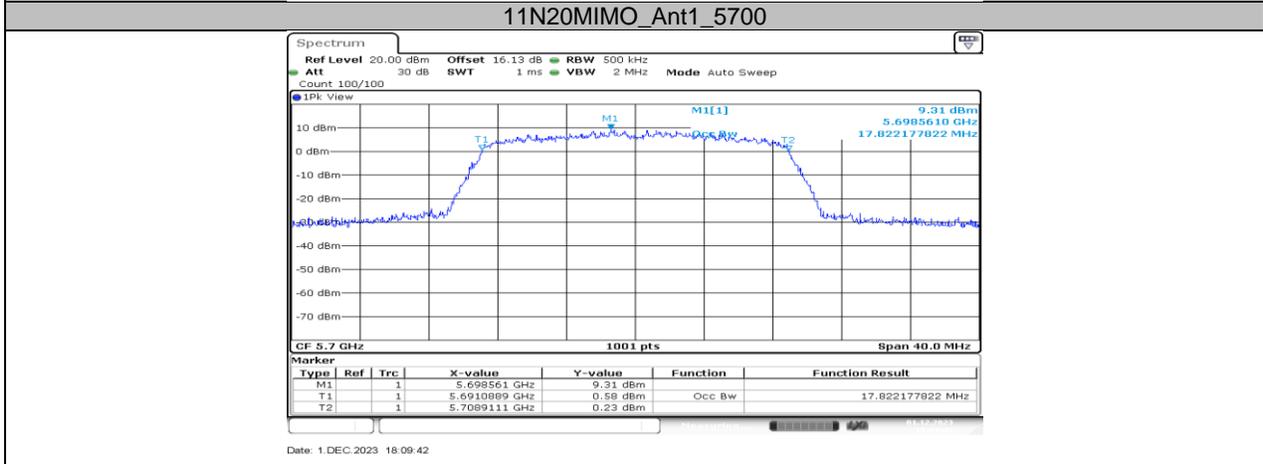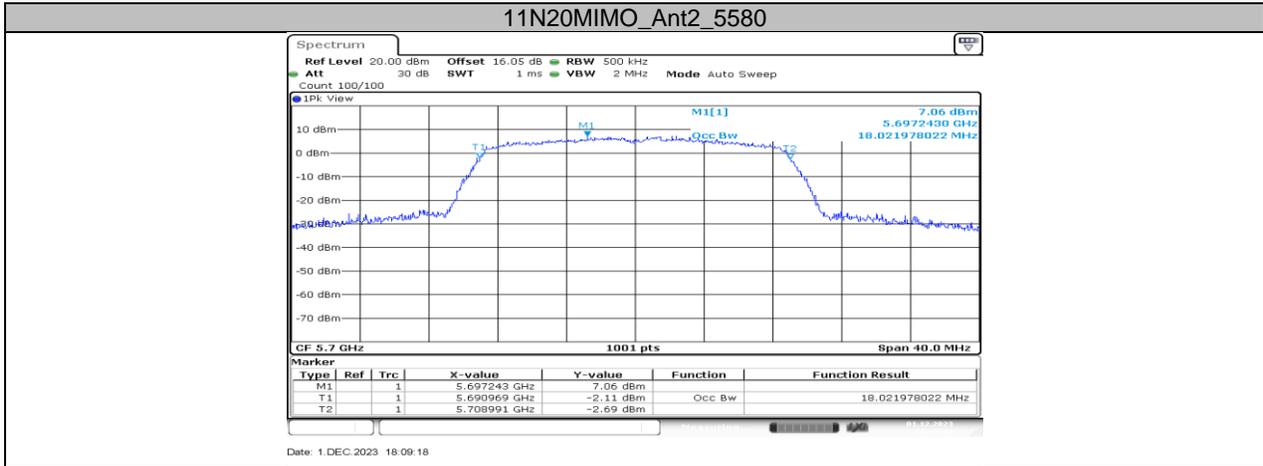


11N20MIMO_Ant1_5720

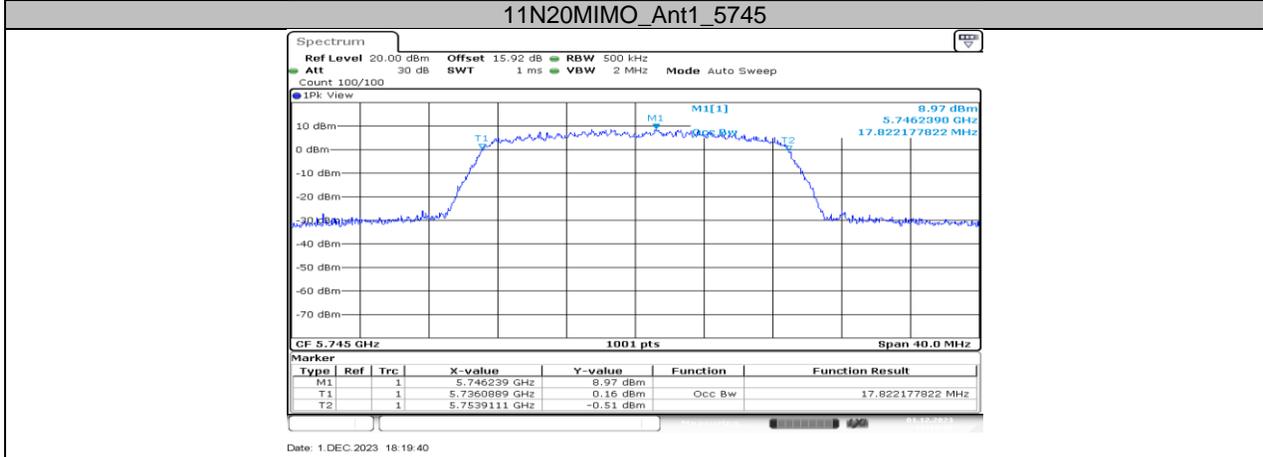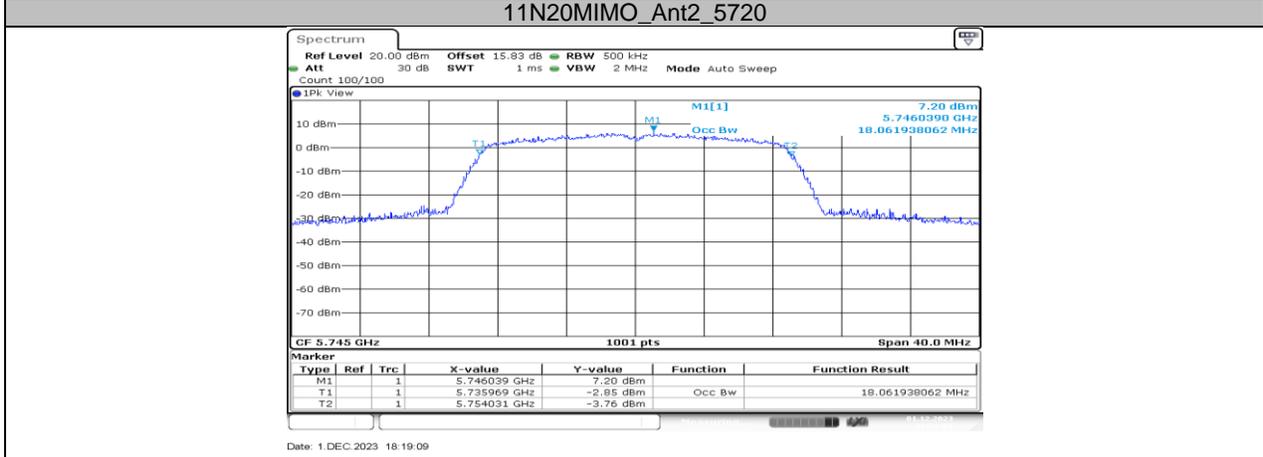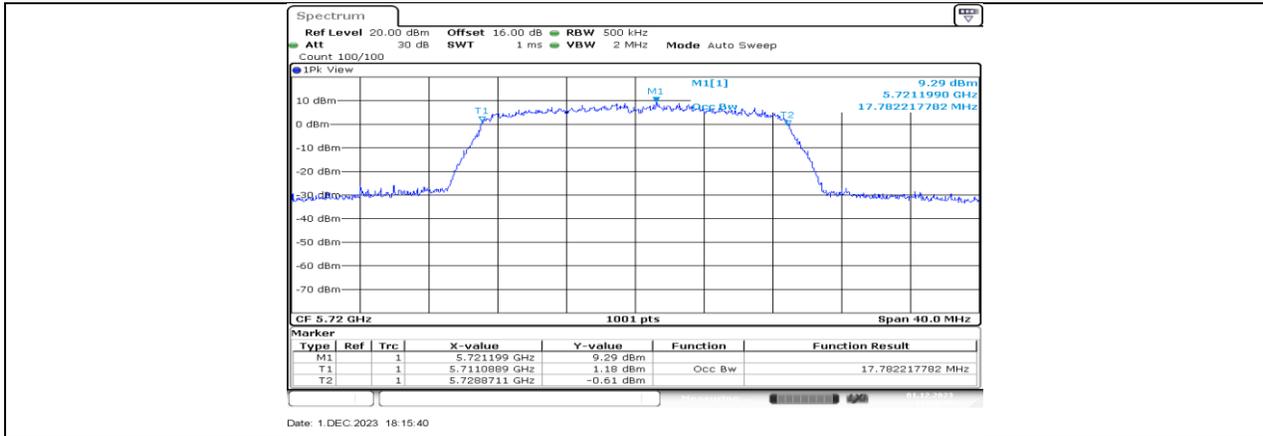


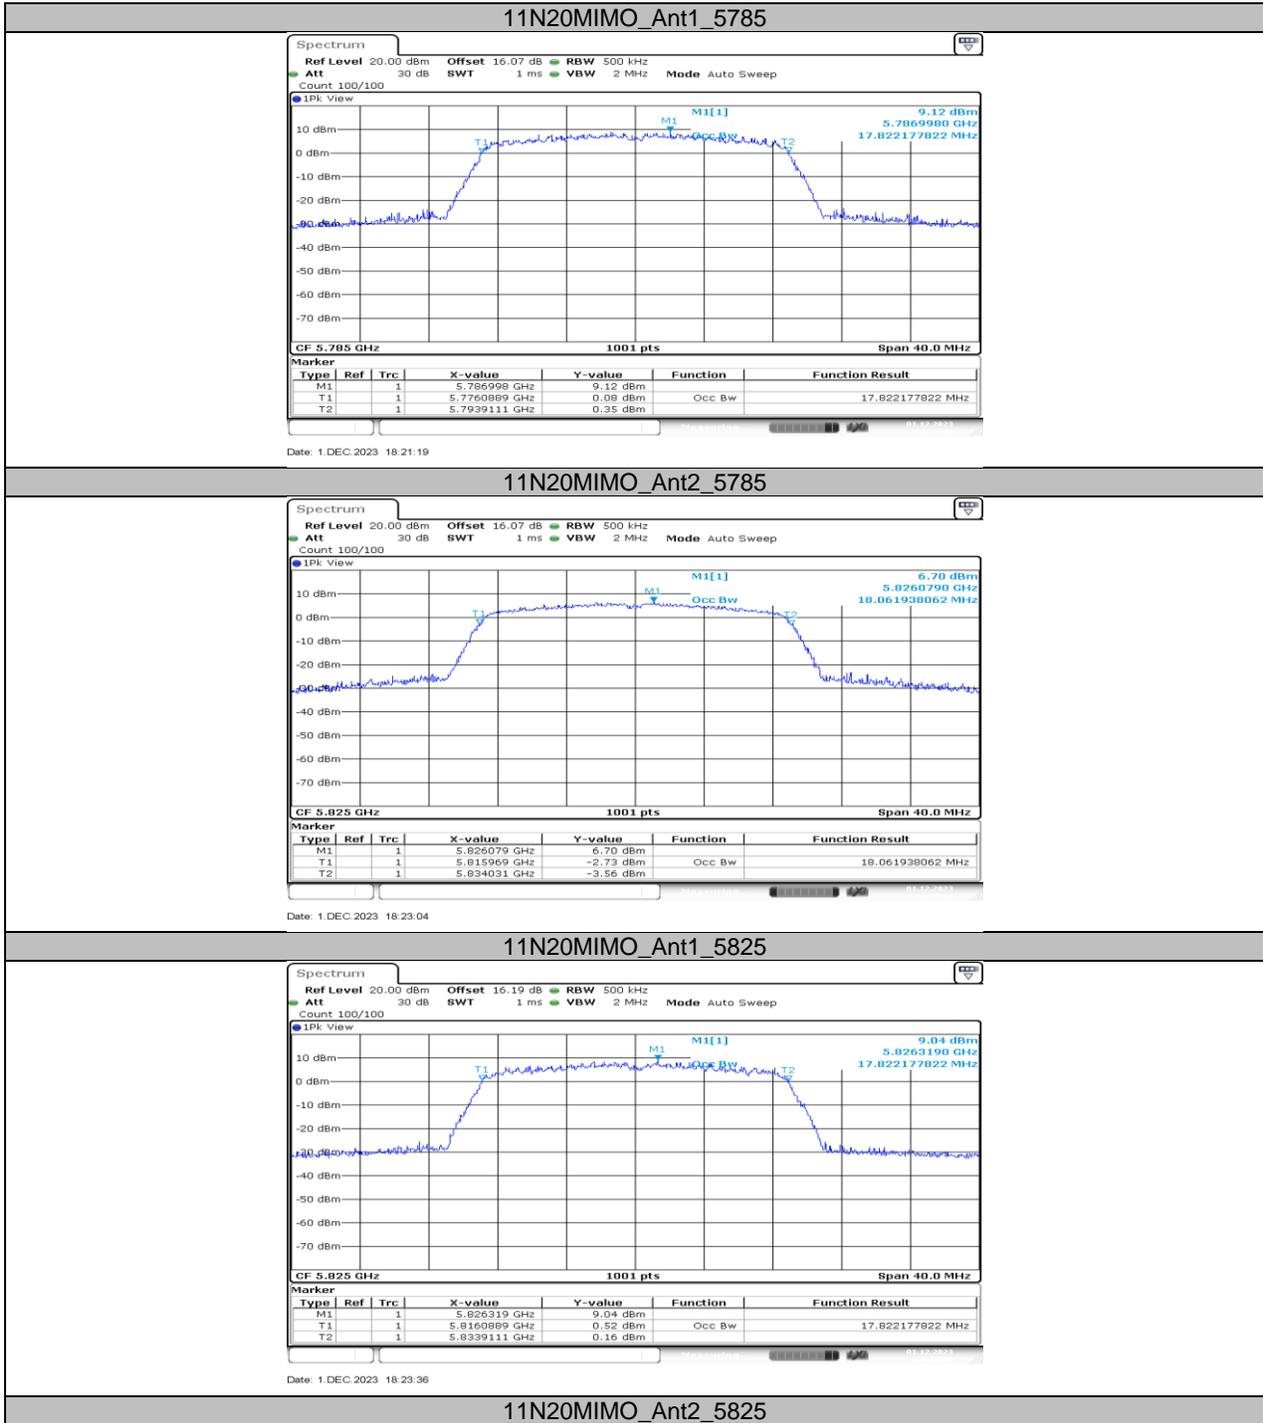

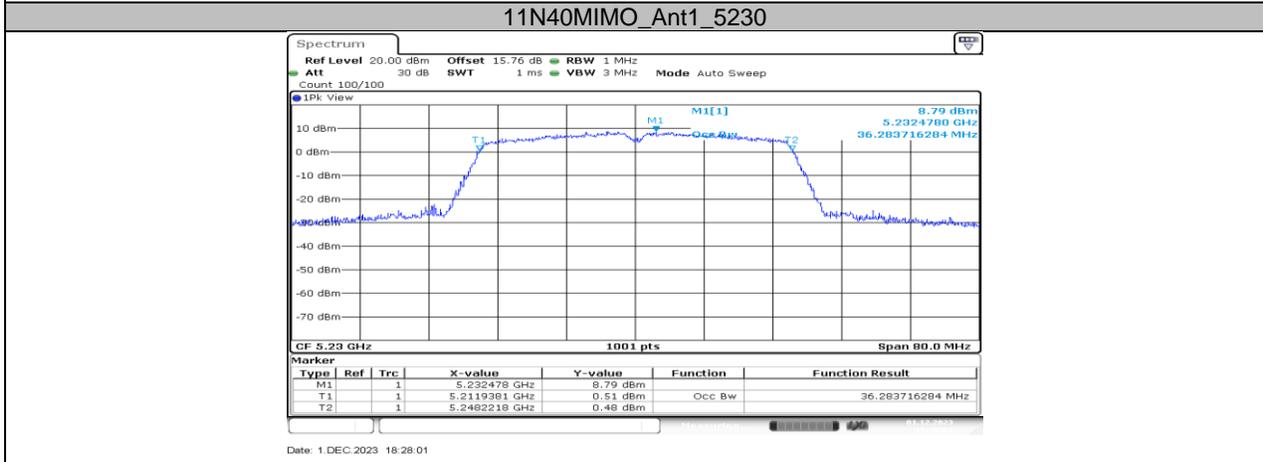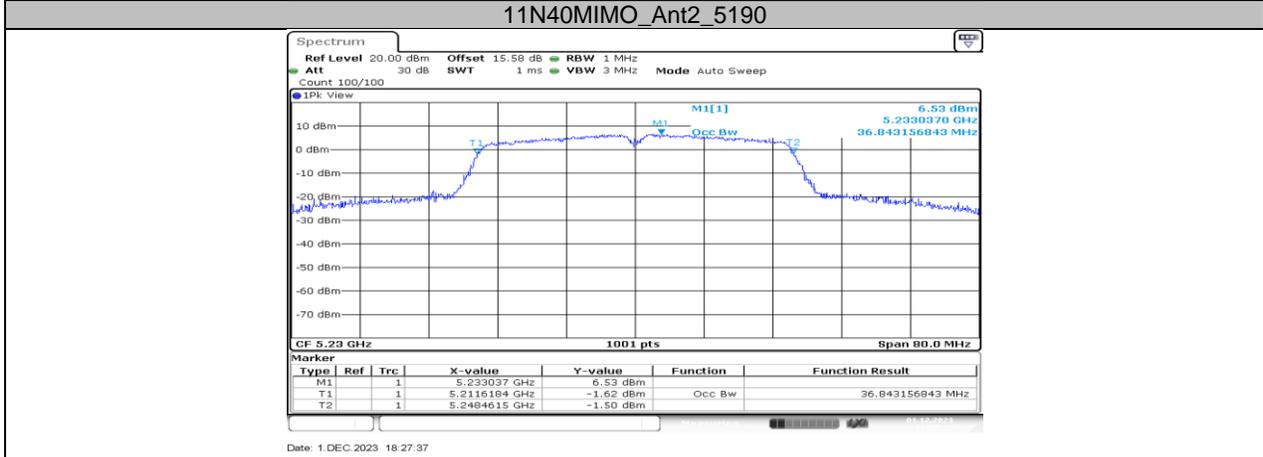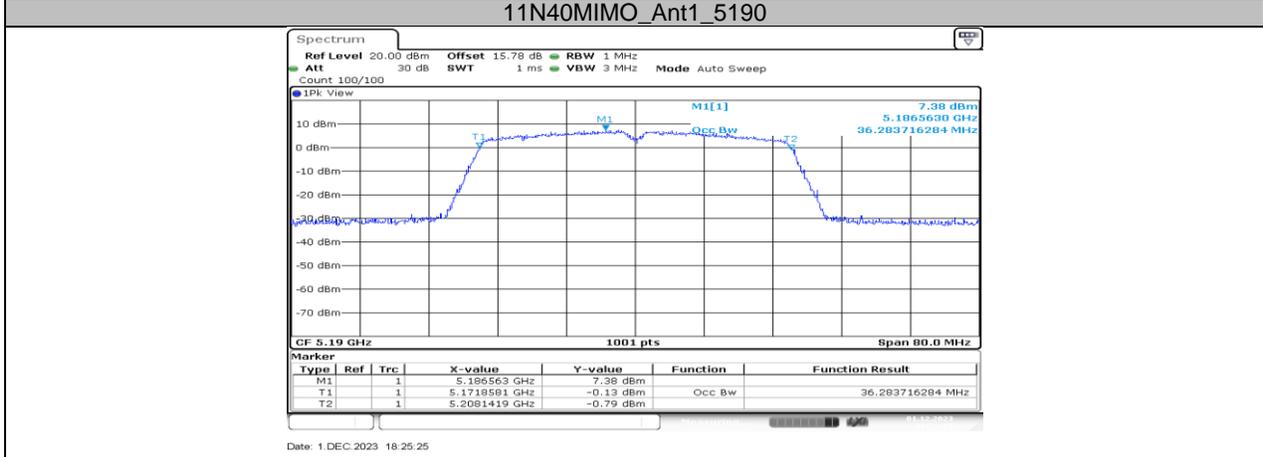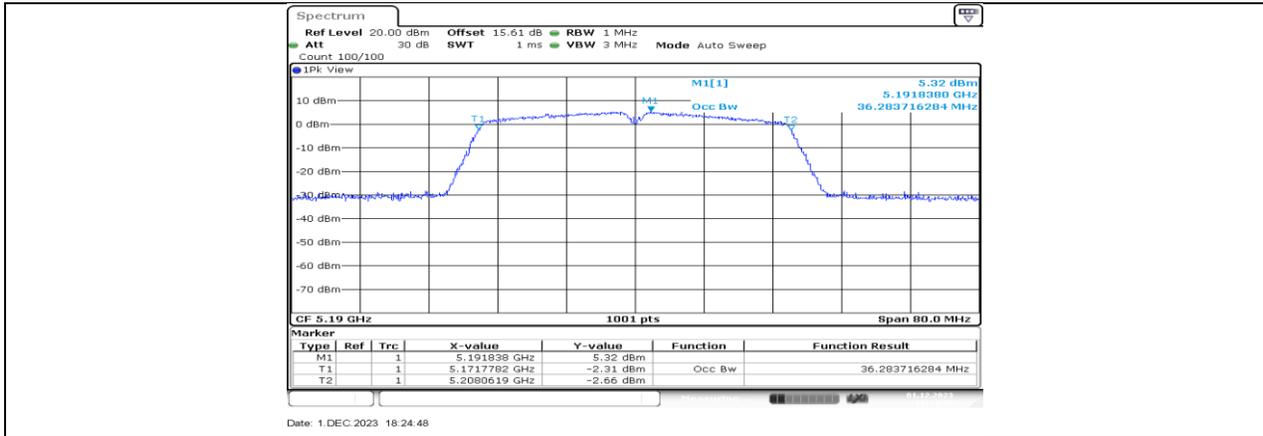


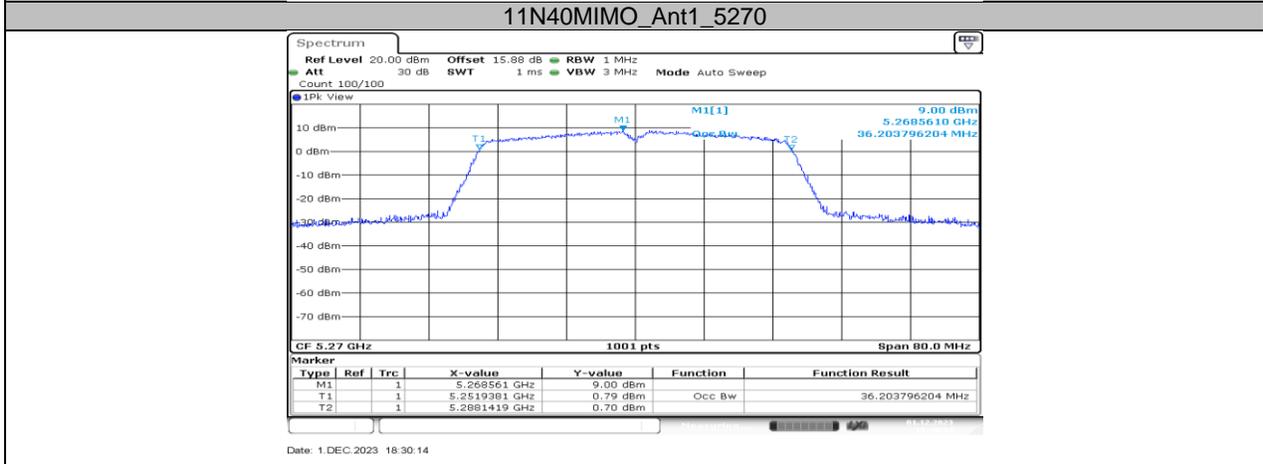


11N40MIMO_Ant1_5310

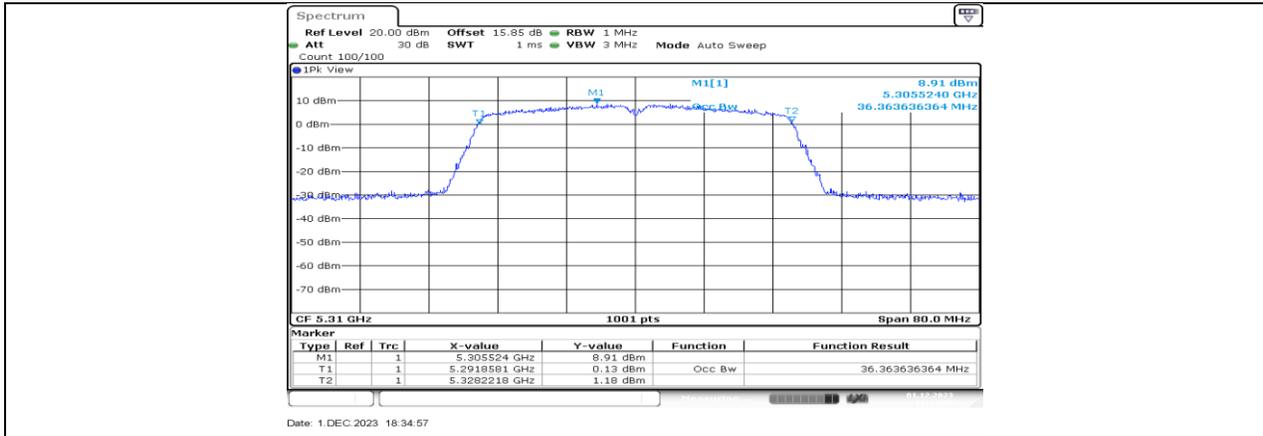


11N40MIMO_Ant2_5310


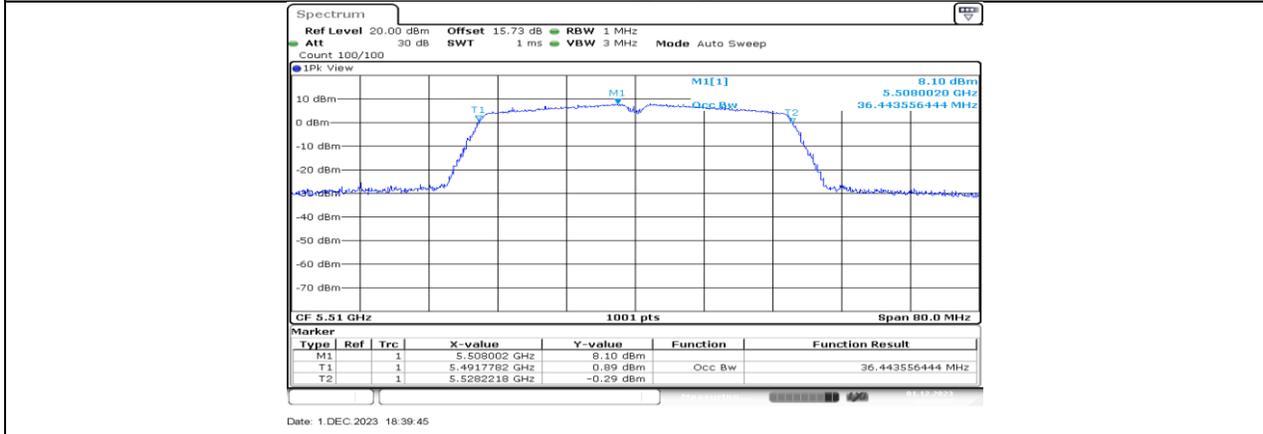


11N40MIMO_Ant1_5510

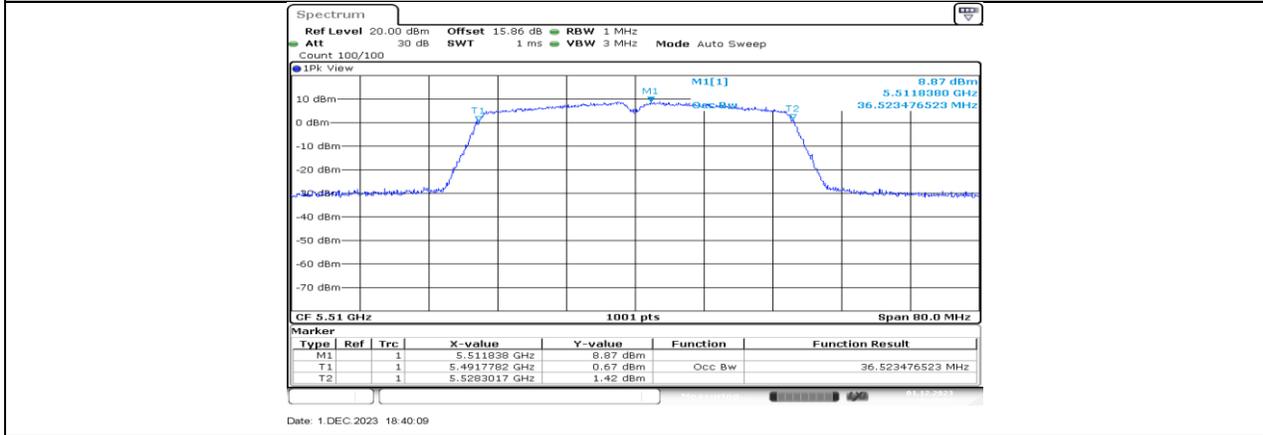


11N40MIMO_Ant2_5510

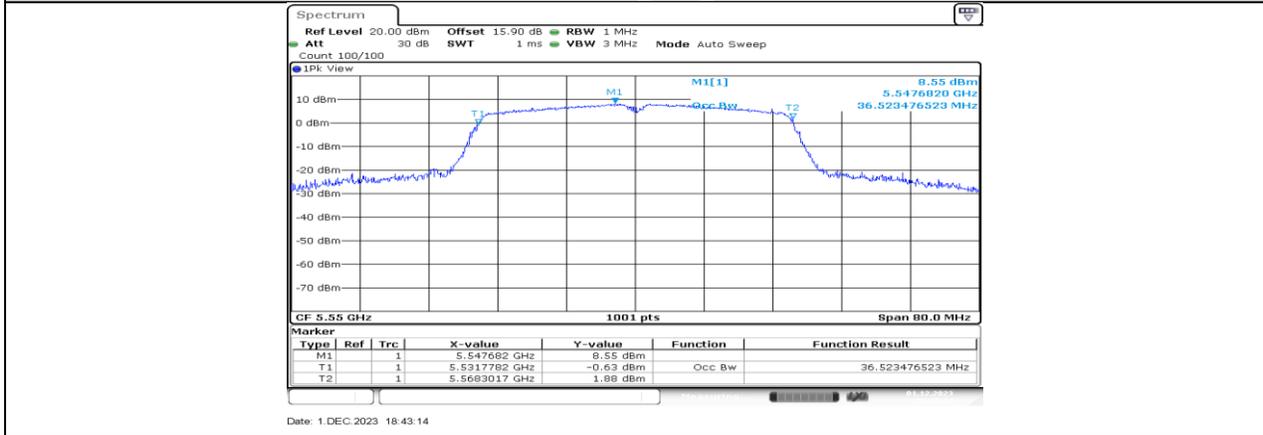


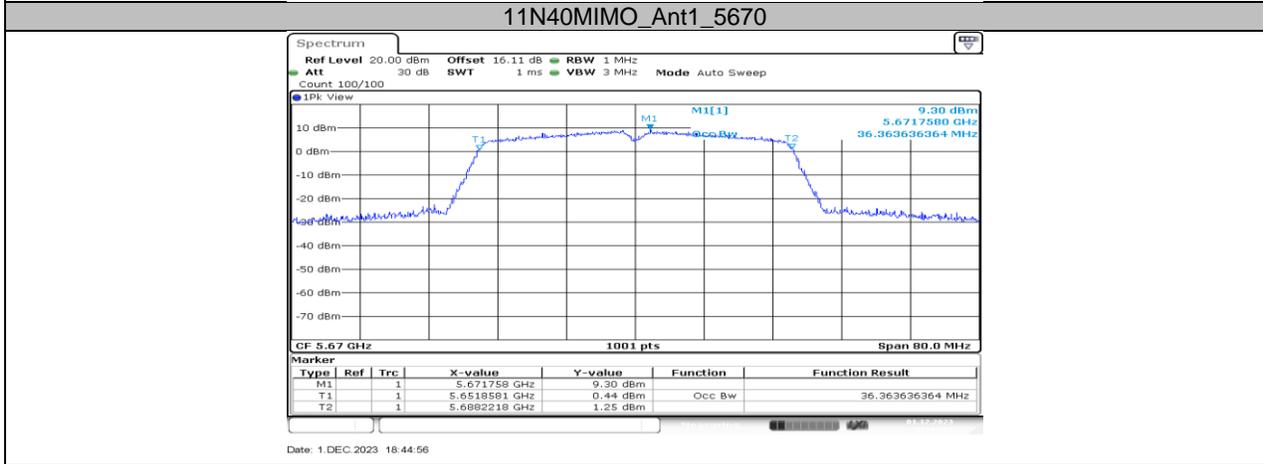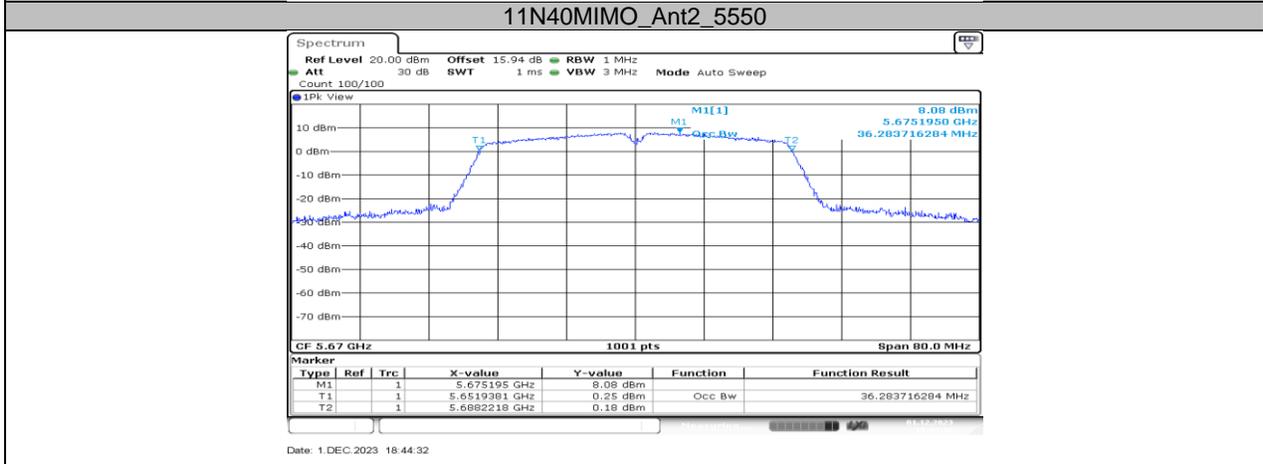


11N40MIMO_Ant2_5670

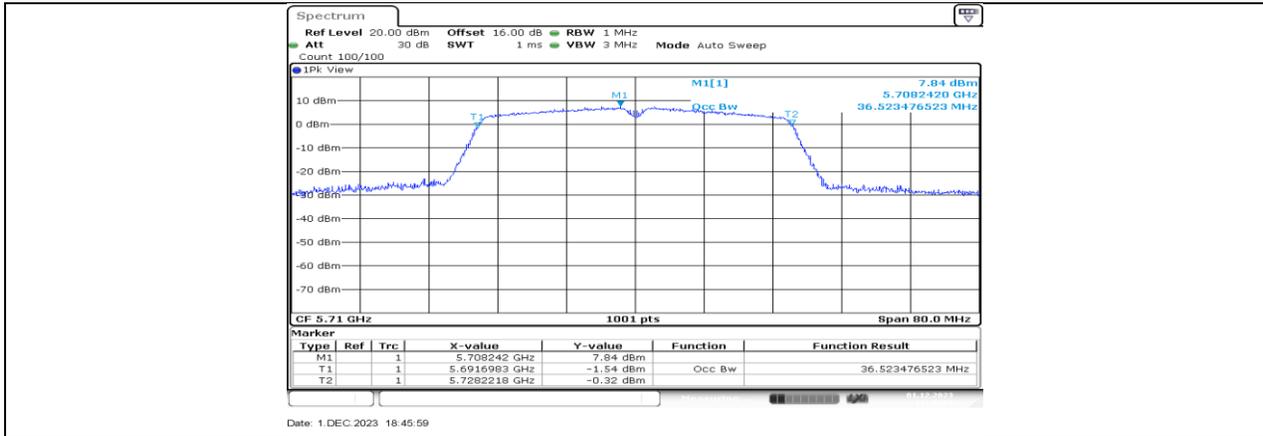

11N40MIMO_Ant1_5710



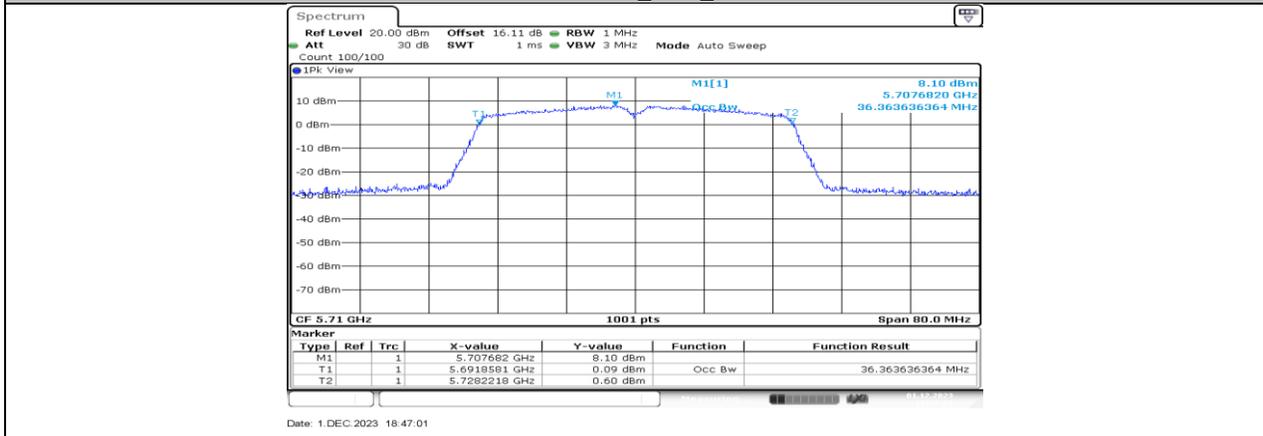


11N40MIMO_Ant2_5710

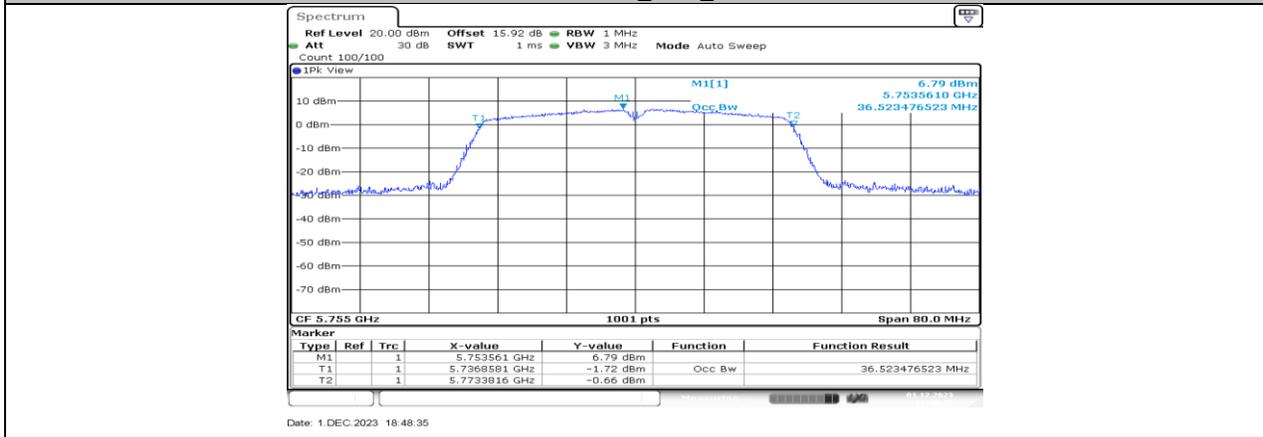


11N40MIMO_Ant1_5755




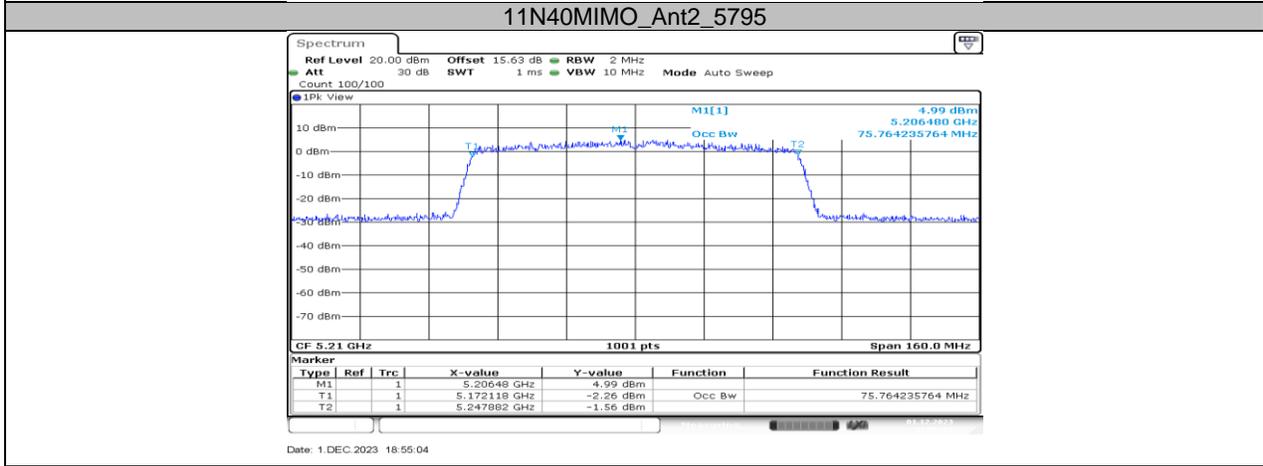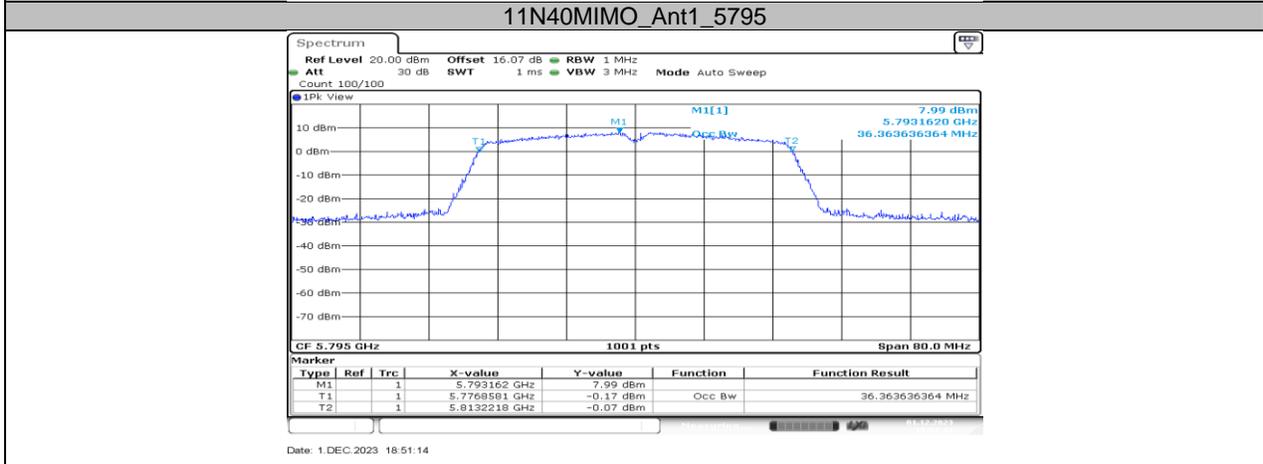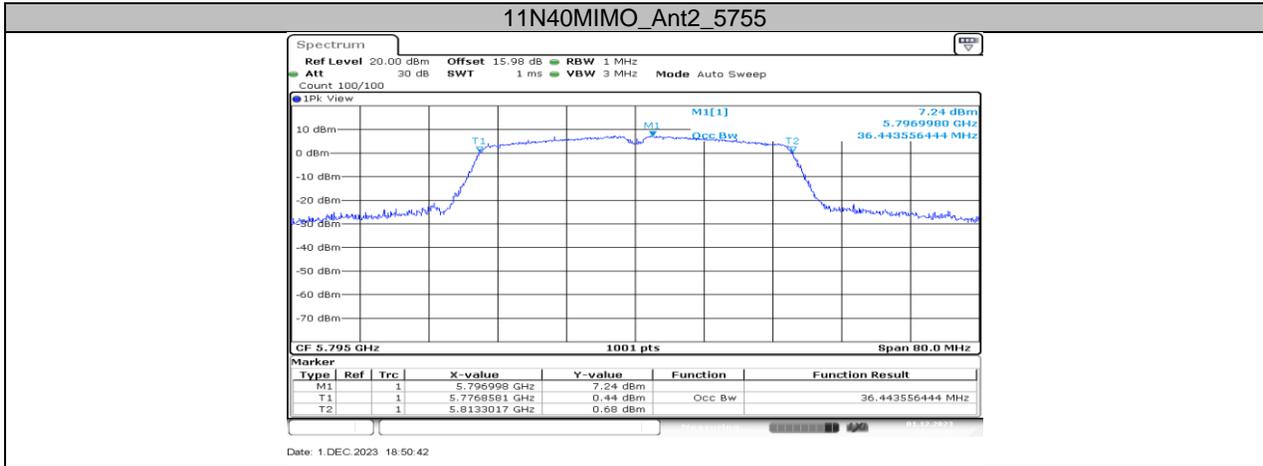


11AC80MIMO_Ant1_5210

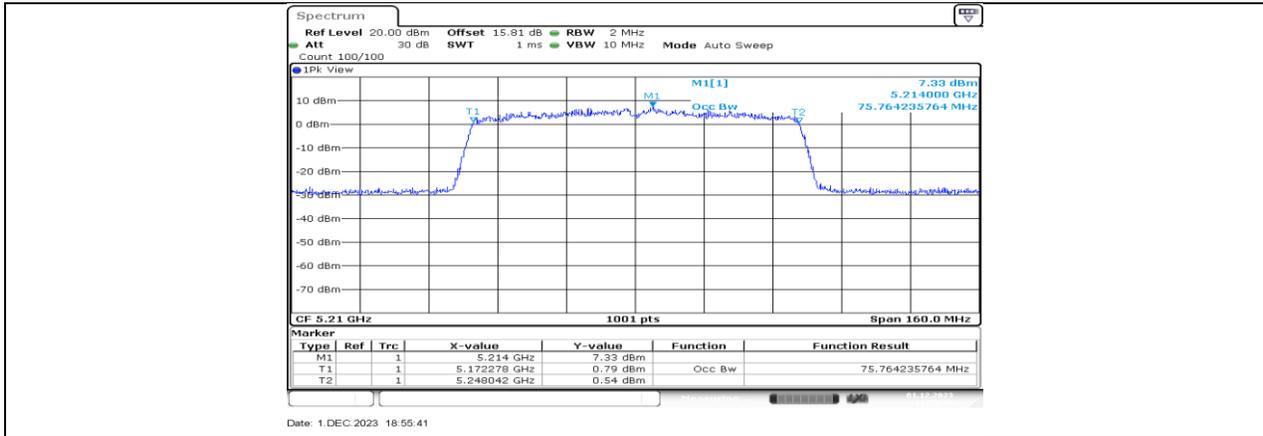


11AC80MIMO_Ant2_5210

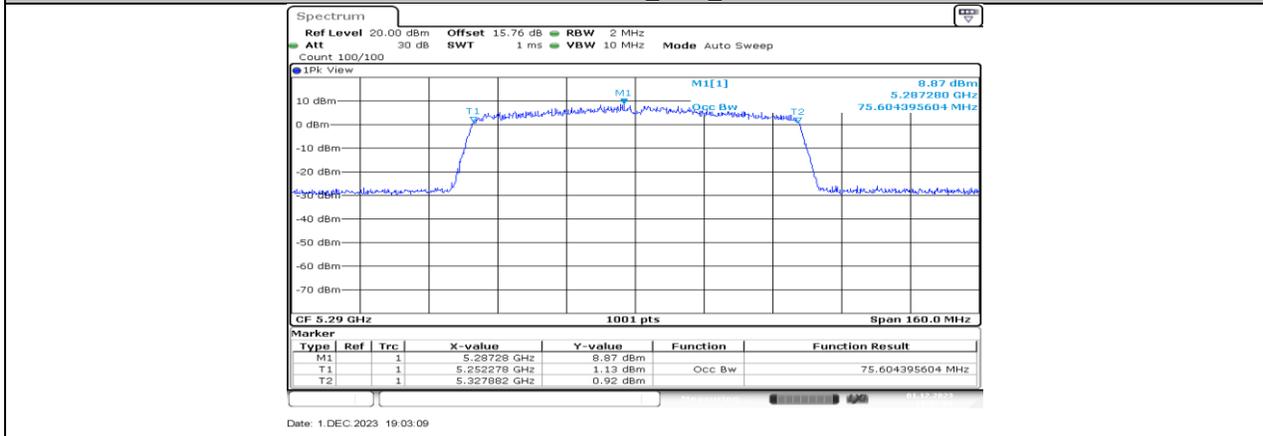





11AC80MIMO_Ant1_5290

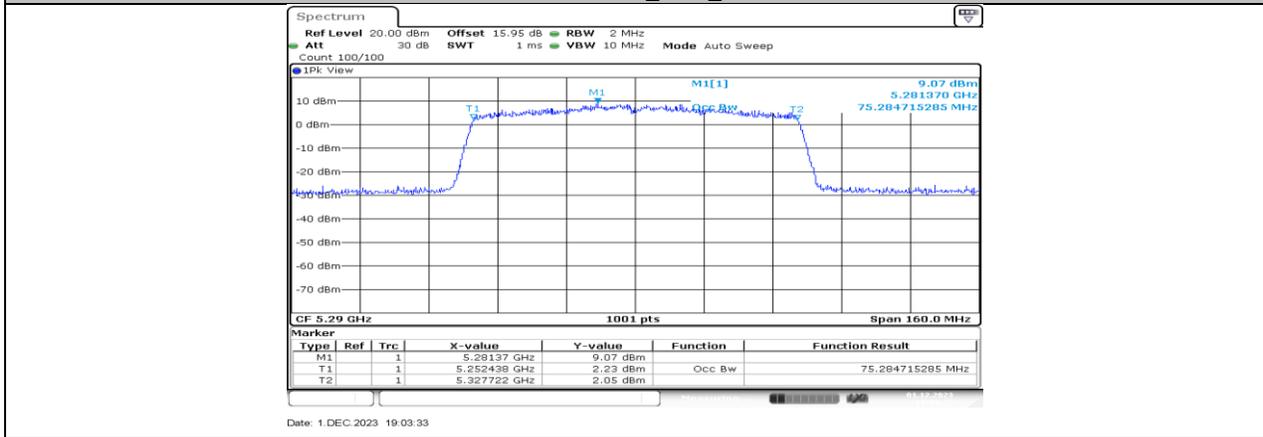


11AC80MIMO_Ant2_5290

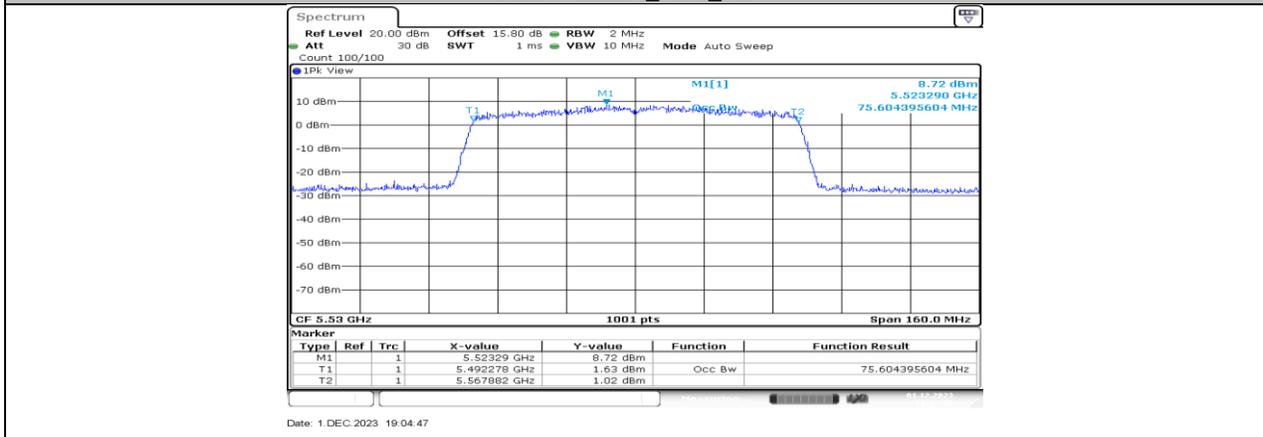

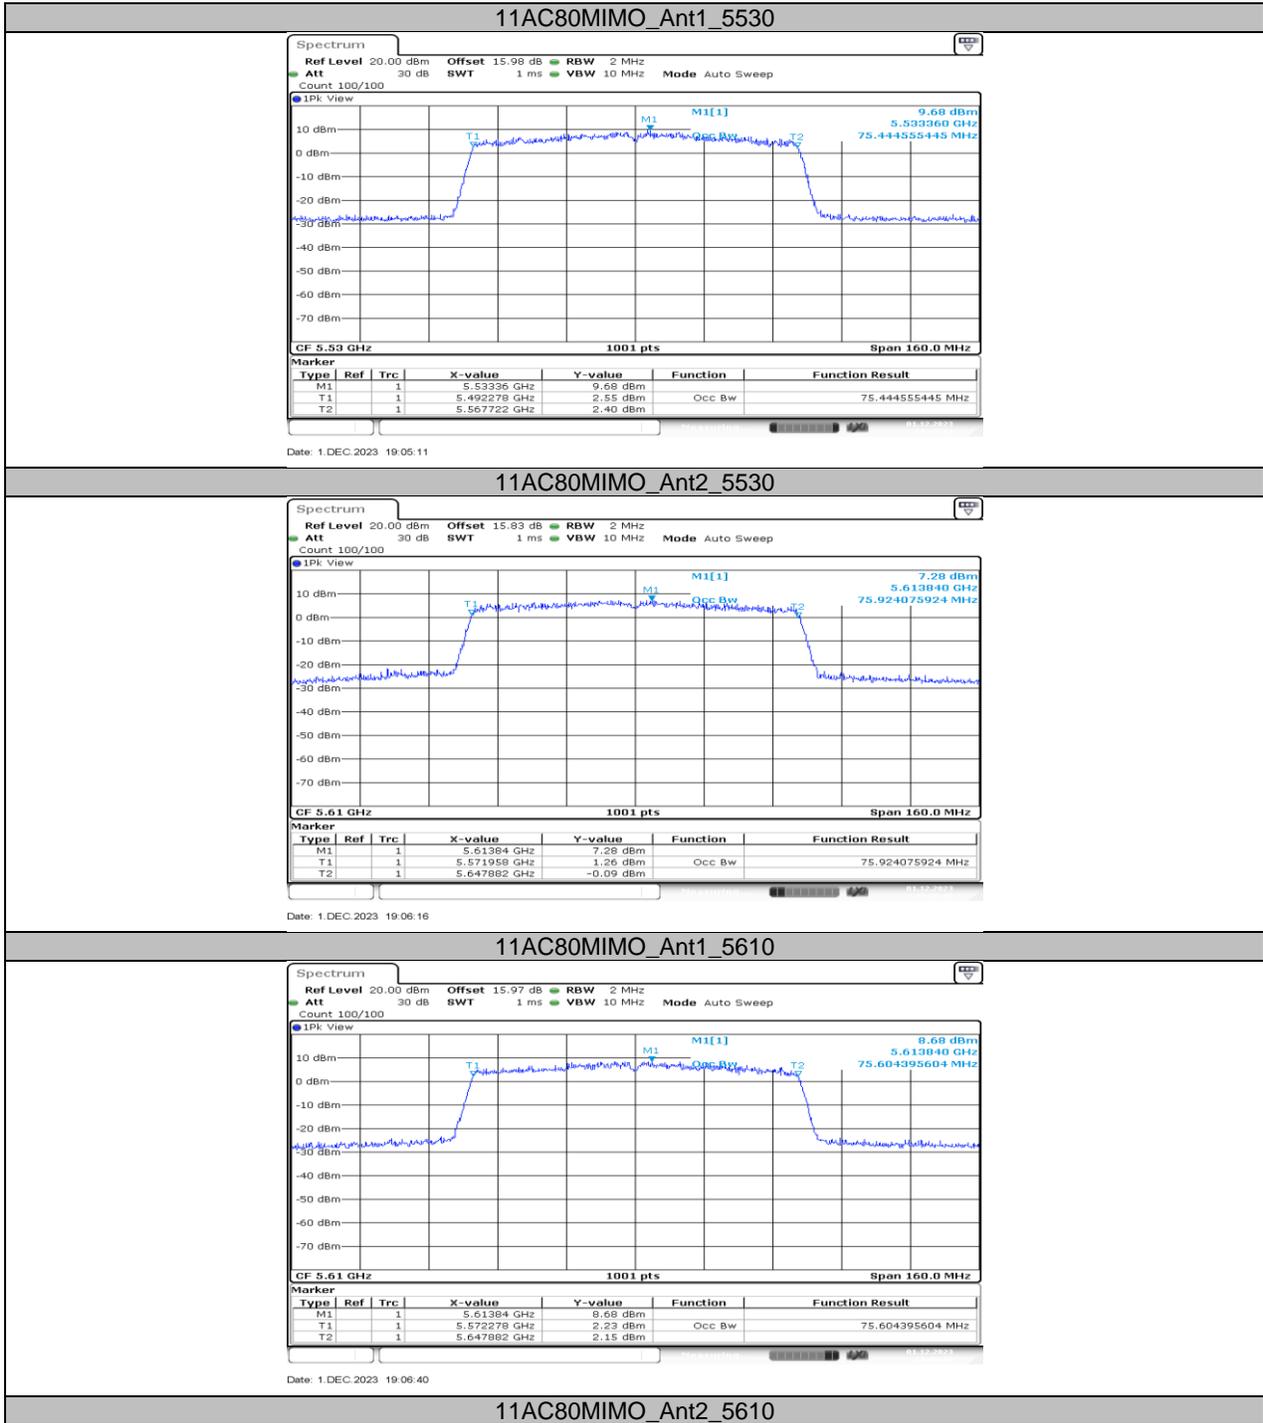

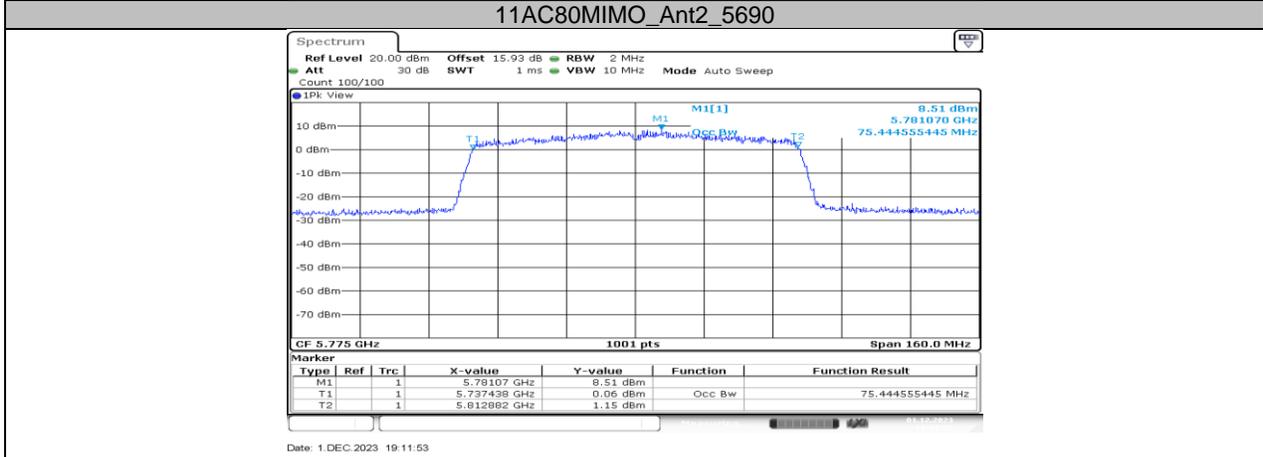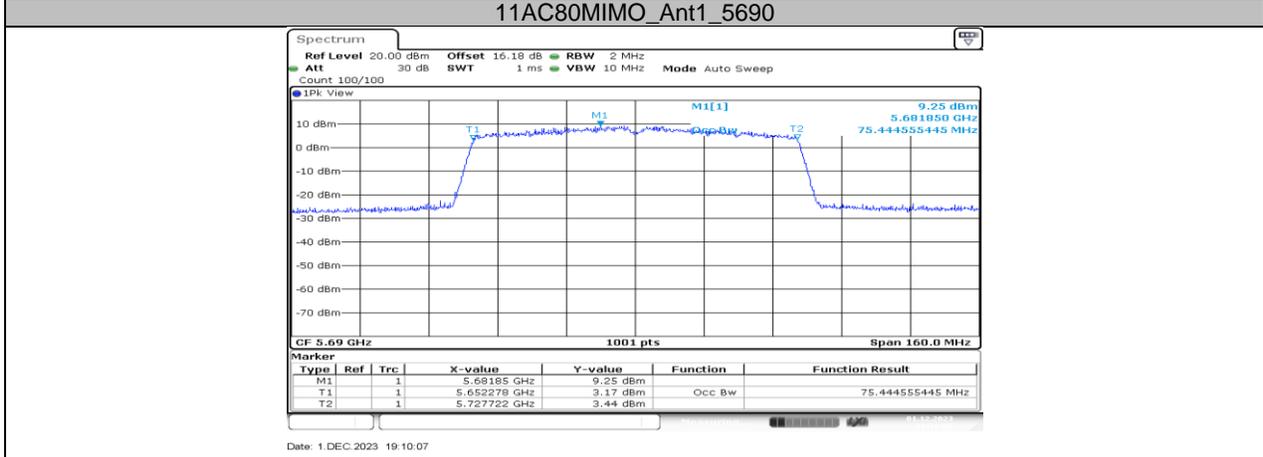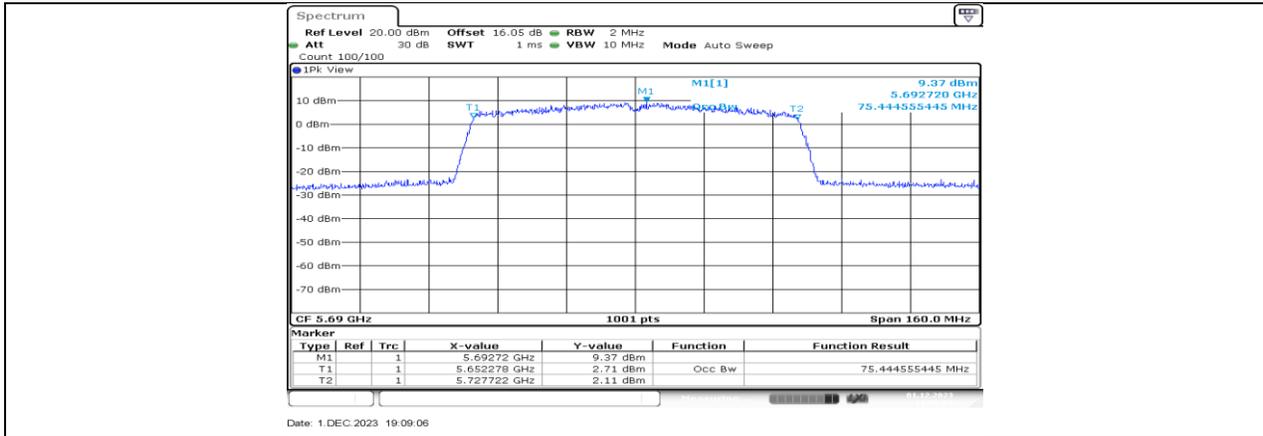

11AC80MIMO_Ant1_5775

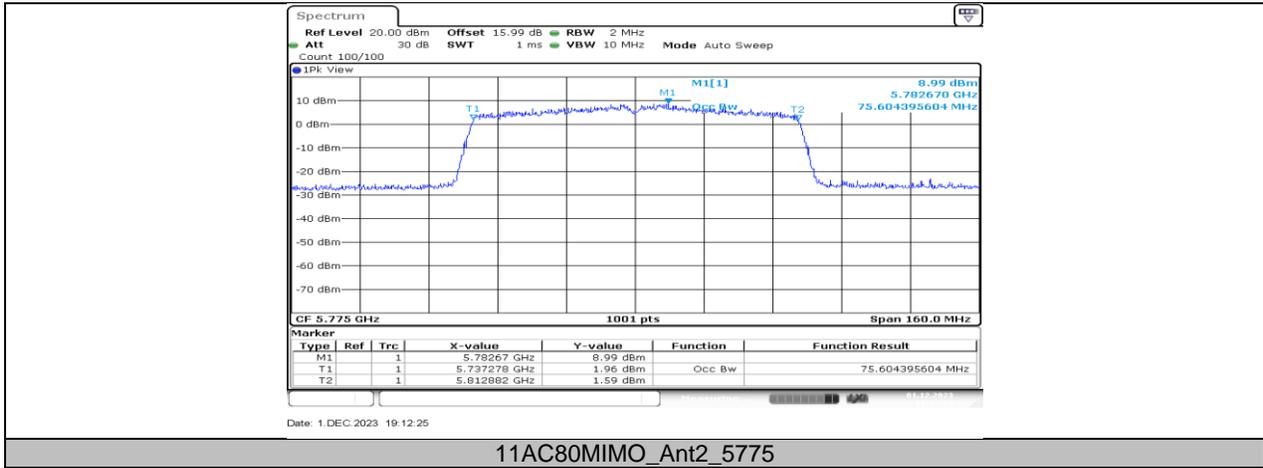



11.3. APPENDIX C: MIN EMISSION BANDWIDTH

11.3.1. Test Result


Test Mode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5720	15.08	5712.44	5727.52	≥0.5	PASS
	Ant2	5720	14.44	5713.08	5727.52	≥0.5	PASS
	Ant1	5720_UNII-3	2.52	5725	5727.52	≥0.5	PASS
	Ant2	5720_UNII-3	2.52	5725	5727.52	≥0.5	PASS
	Ant1	5745	14.44	5737.44	5751.88	≥0.5	PASS
	Ant2	5745	15.16	5737.40	5752.56	≥0.5	PASS
	Ant1	5785	16.04	5777.08	5793.12	≥0.5	PASS
	Ant2	5785	16.28	5776.84	5793.12	≥0.5	PASS
	Ant1	5825	14.72	5817.40	5832.12	≥0.5	PASS
	Ant2	5825	16.04	5817.08	5833.12	≥0.5	PASS
11N20MIMO	Ant1	5720	16.48	5711.60	5728.08	≥0.5	PASS
	Ant2	5720	15.68	5712.44	5728.12	≥0.5	PASS
	Ant1	5720_UNII-3	3.08	5725	5728.08	≥0.5	PASS
	Ant2	5720_UNII-3	3.12	5725	5728.12	≥0.5	PASS
	Ant1	5745	16.08	5737.40	5753.48	≥0.5	PASS
	Ant2	5745	17.56	5736.20	5753.76	≥0.5	PASS
	Ant1	5785	15.12	5777.44	5792.56	≥0.5	PASS
	Ant2	5785	16.56	5776.56	5793.12	≥0.5	PASS
	Ant1	5825	15.12	5817.44	5832.56	≥0.5	PASS
	Ant2	5825	14.48	5818.04	5832.52	≥0.5	PASS
11N40MIMO	Ant1	5710	35.20	5692.40	5727.60	≥0.5	PASS
	Ant2	5710	35.20	5692.40	5727.60	≥0.5	PASS
	Ant1	5710_UNII-3	2.6	5725	5727.60	≥0.5	PASS
	Ant2	5710_UNII-3	2.6	5725	5727.60	≥0.5	PASS
	Ant1	5755	35.04	5737.48	5772.52	≥0.5	PASS
	Ant2	5755	35.04	5737.48	5772.52	≥0.5	PASS
	Ant1	5795	35.12	5777.48	5812.60	≥0.5	PASS
	Ant2	5795	35.12	5777.48	5812.60	≥0.5	PASS
11AC80MIMO	Ant1	5690	75.20	5652.40	5727.60	≥0.5	PASS
	Ant2	5690	75.20	5652.40	5727.60	≥0.5	PASS
	Ant1	5690_UNII-3	2.6	5725	5727.60	≥0.5	PASS
	Ant2	5690_UNII-3	2.6	5725	5727.60	≥0.5	PASS
	Ant1	5775	75.20	5737.40	5812.60	≥0.5	PASS
	Ant2	5775	75.20	5737.40	5812.60	≥0.5	PASS

11.3.2. Test Graphs

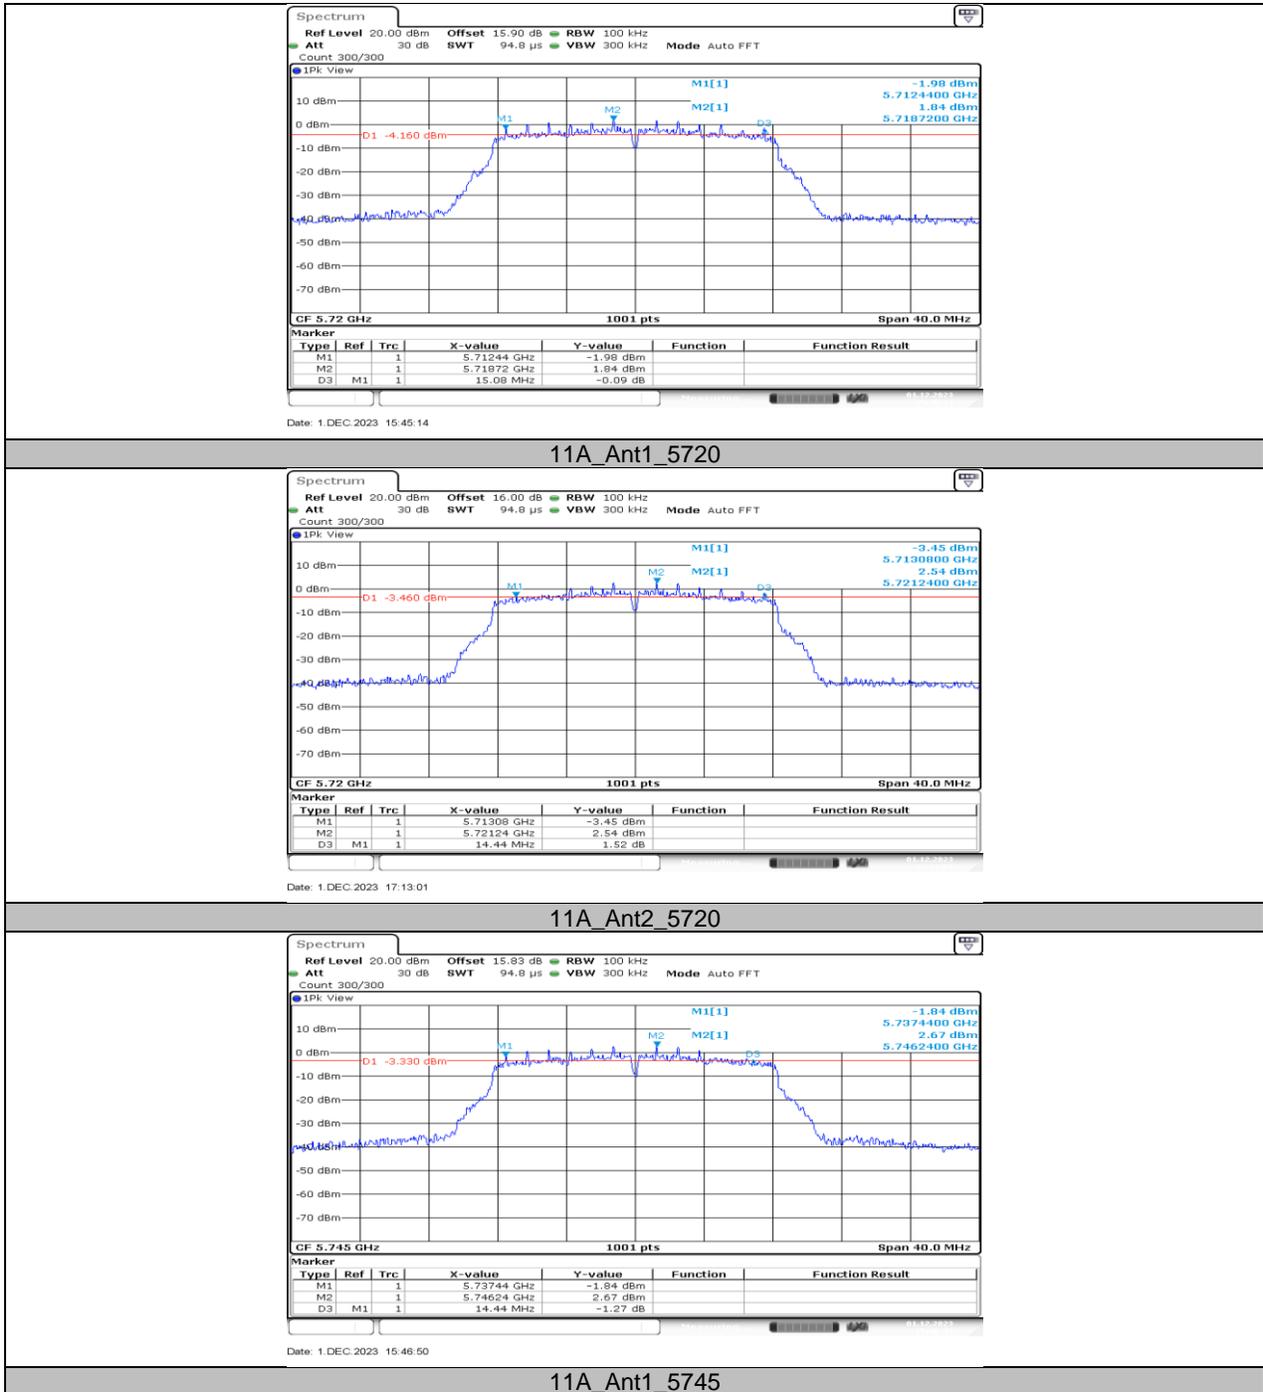


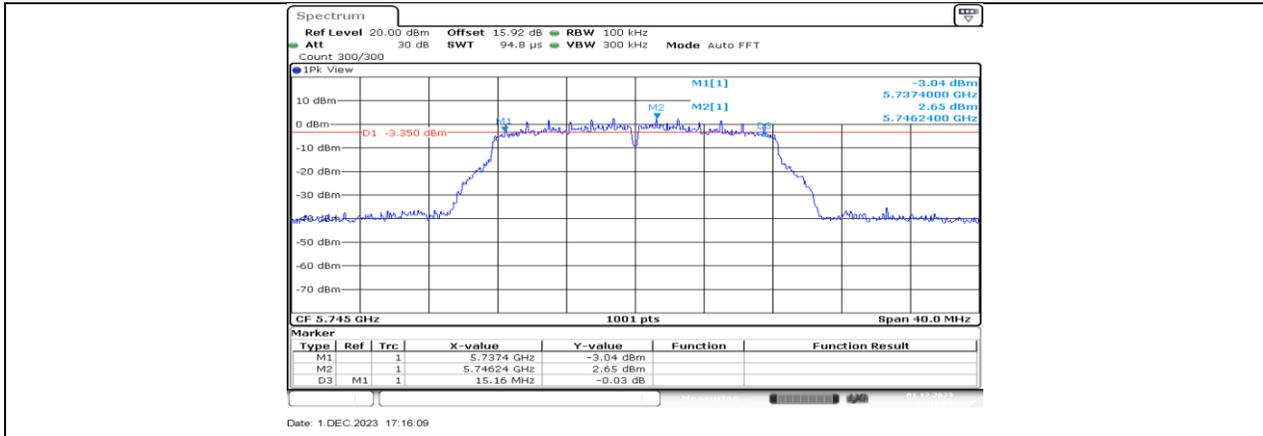


11A_Ant2_5745



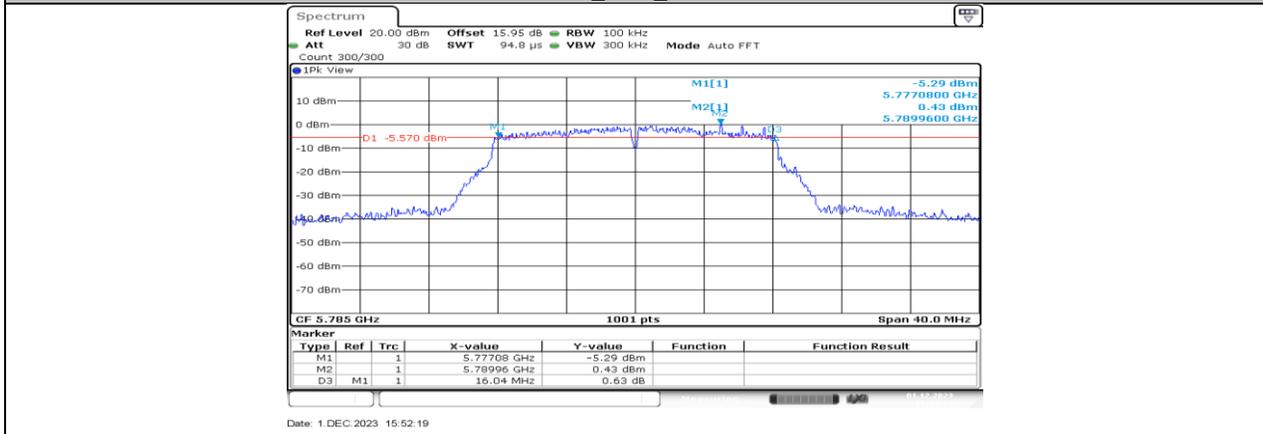


11A_Ant1_5785

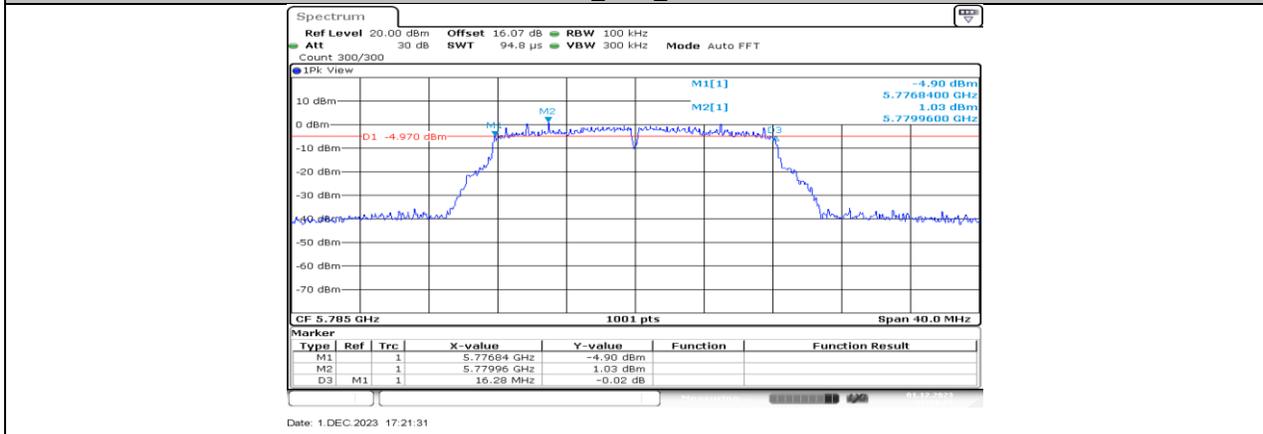


11A_Ant2_5785

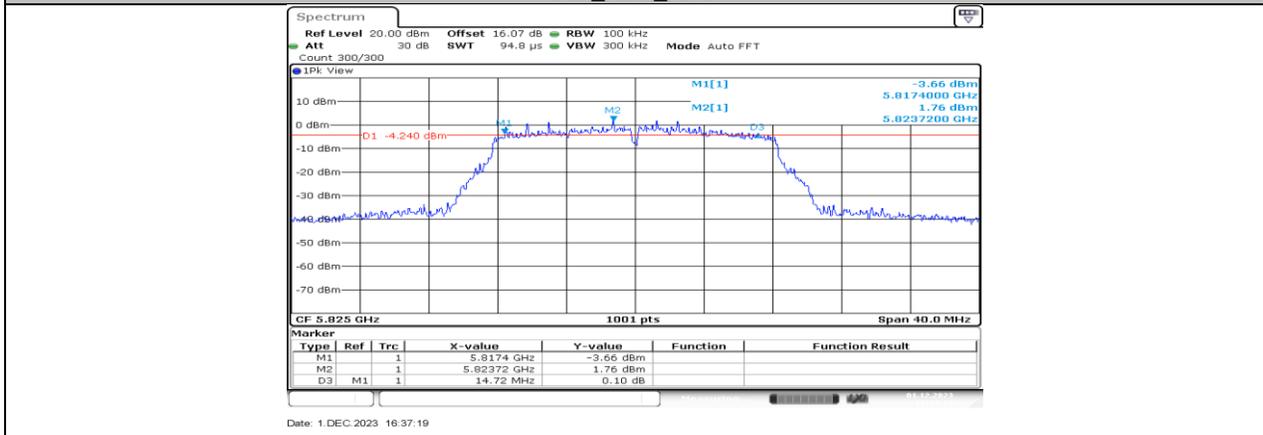


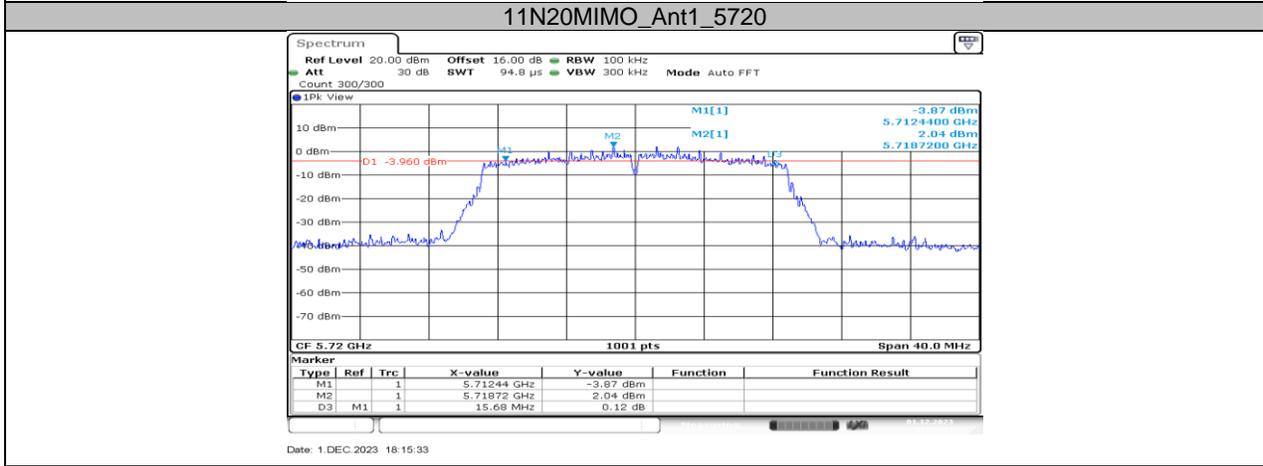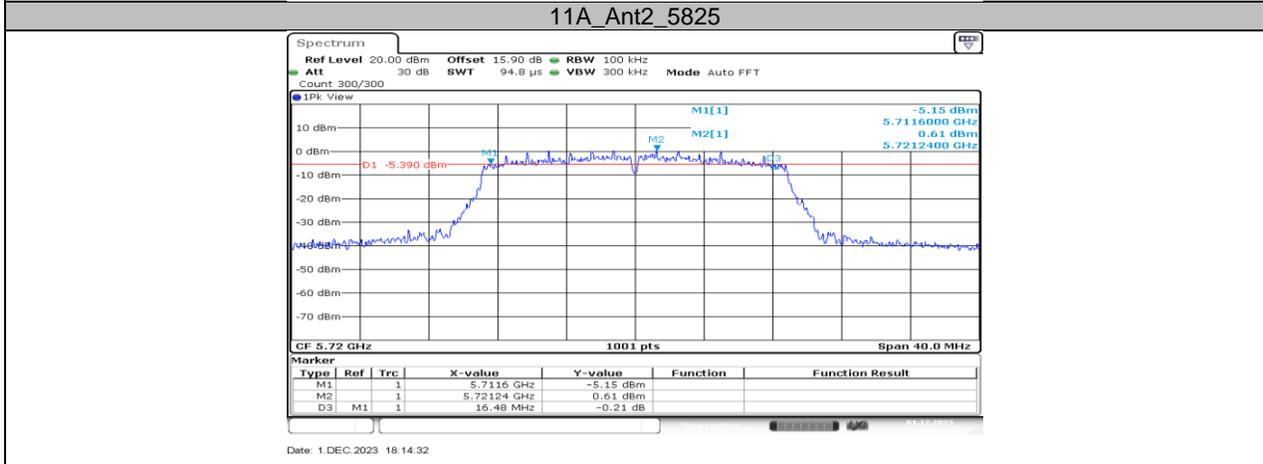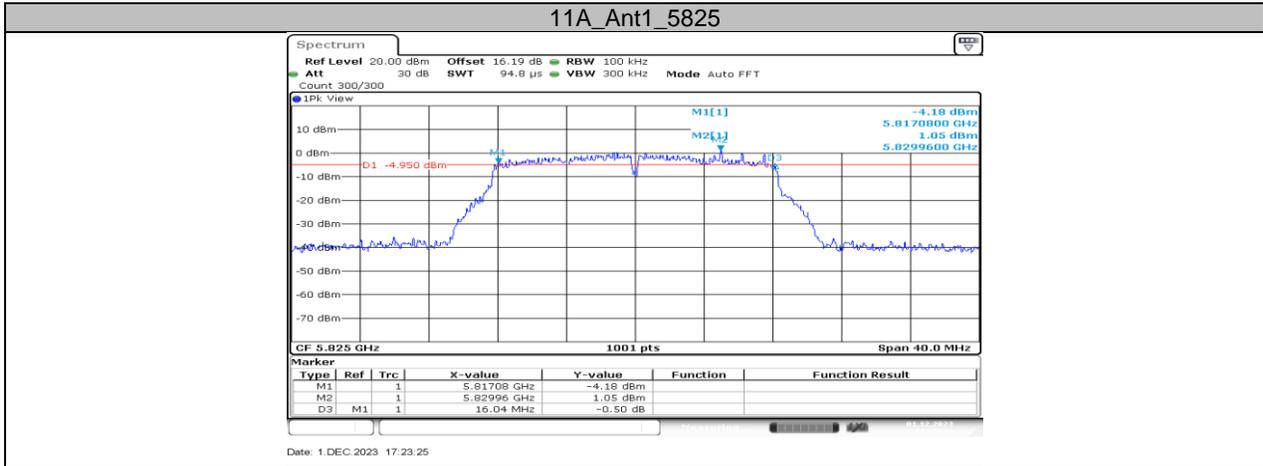


11N20MIMO_Ant2_5720

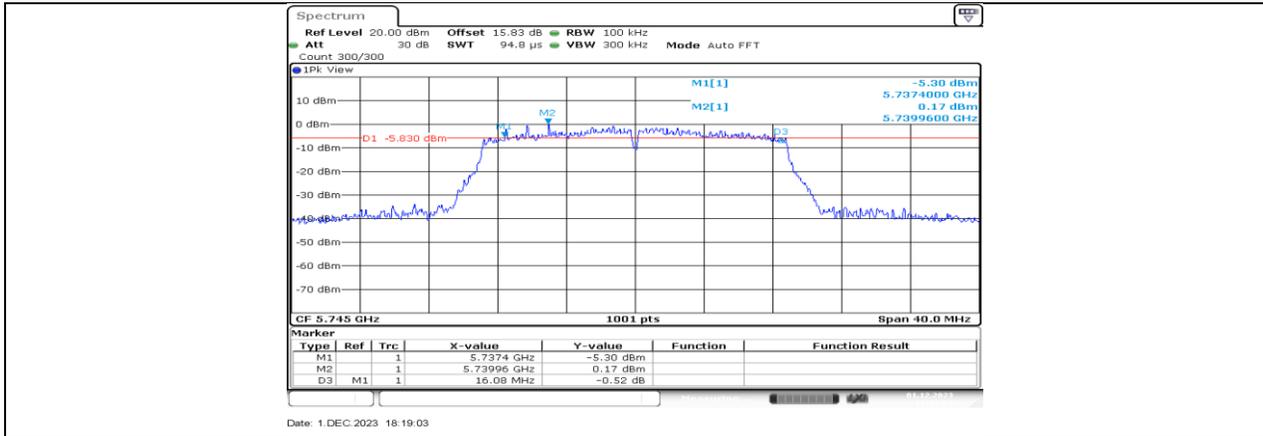


Date: 1.DEC.2023 18:19:03

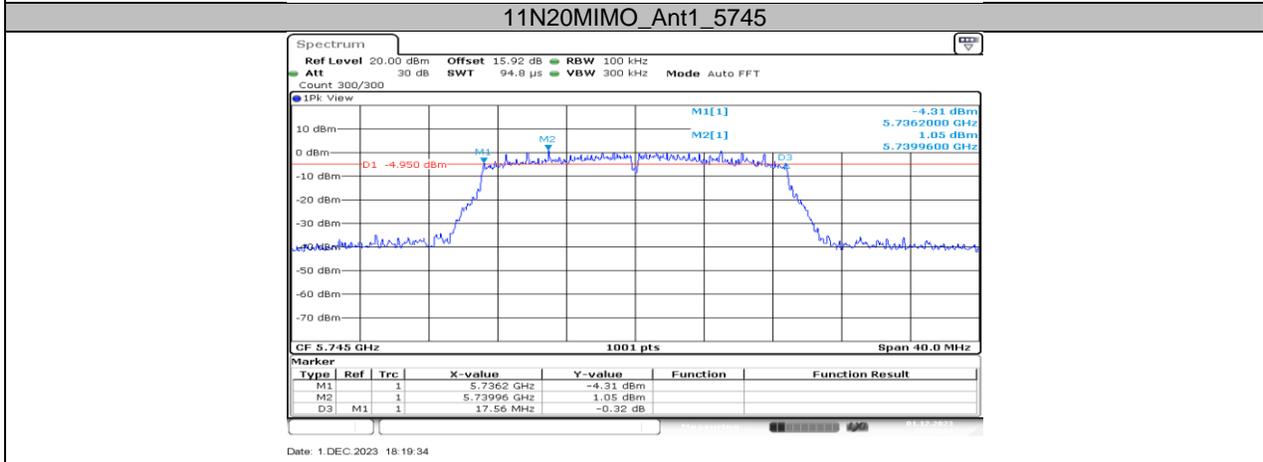




Date: 1.DEC.2023 18:19:34

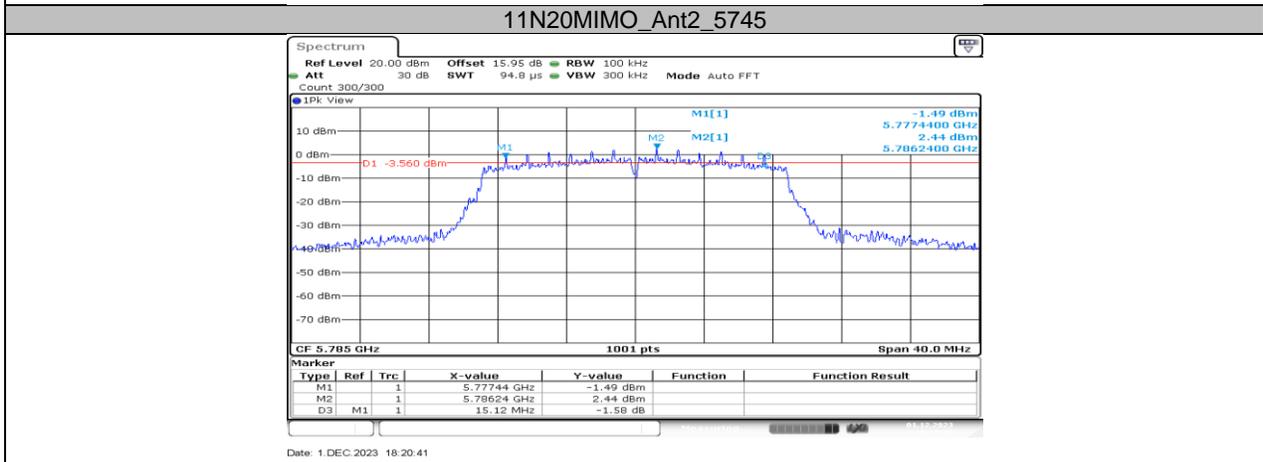





Date: 1.DEC.2023 18:20:41



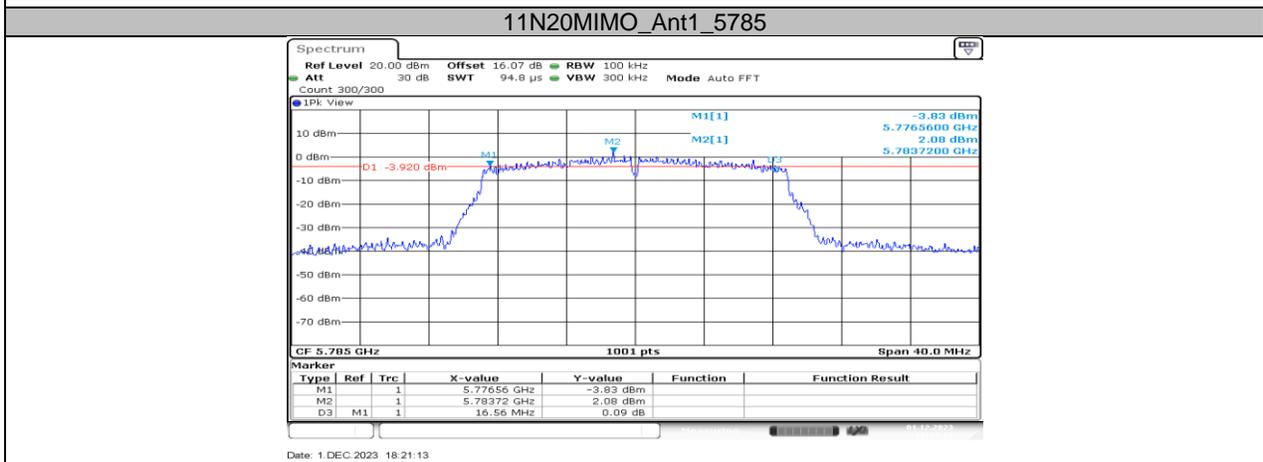


Date: 1.DEC.2023 18:21:13

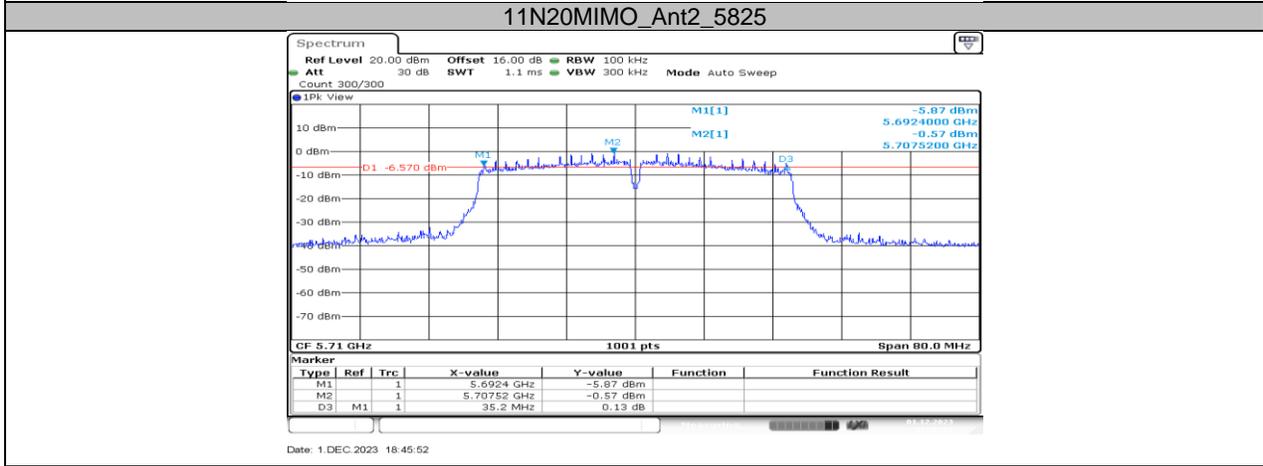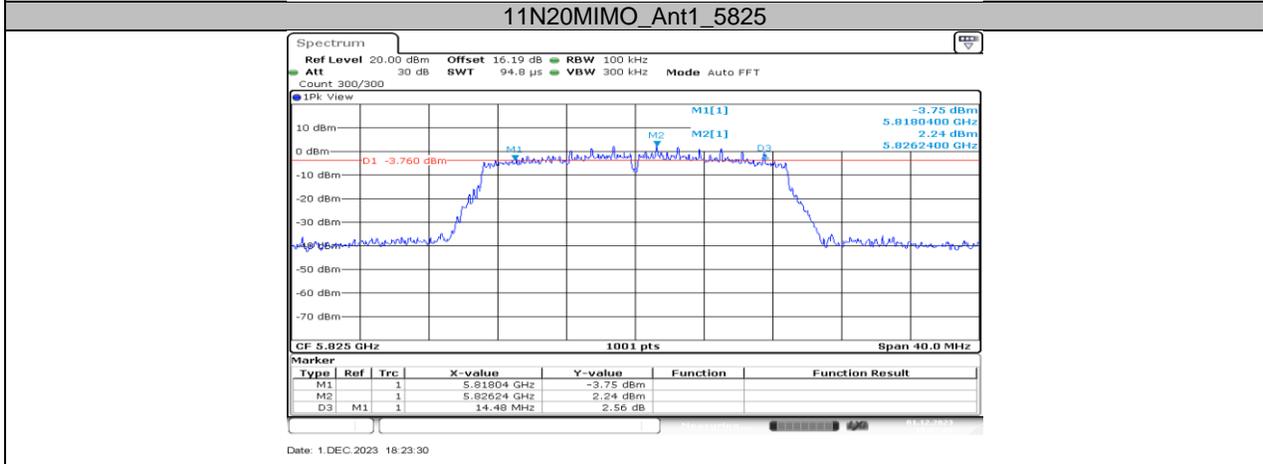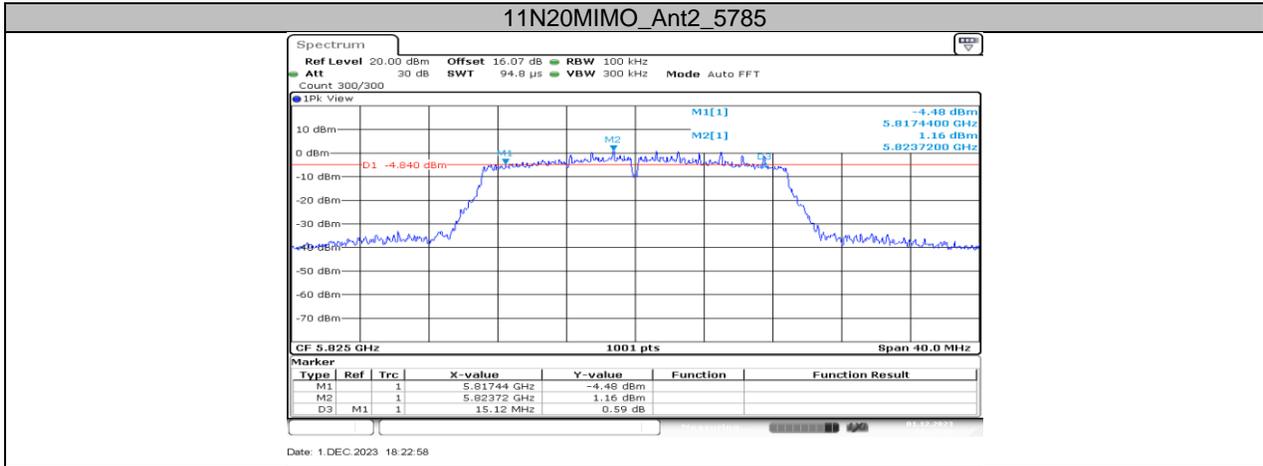


11N40MIMO_Ant1_5710

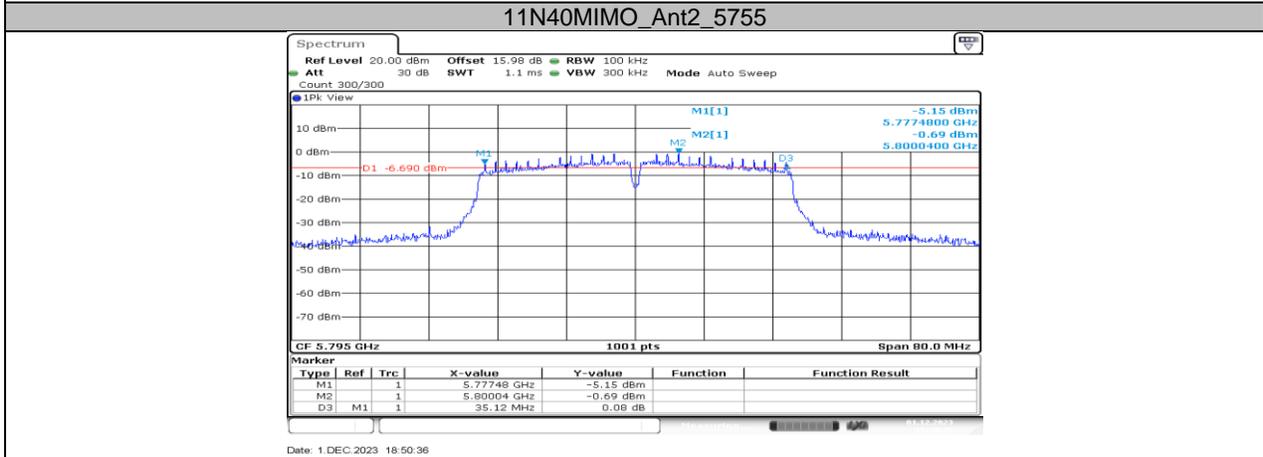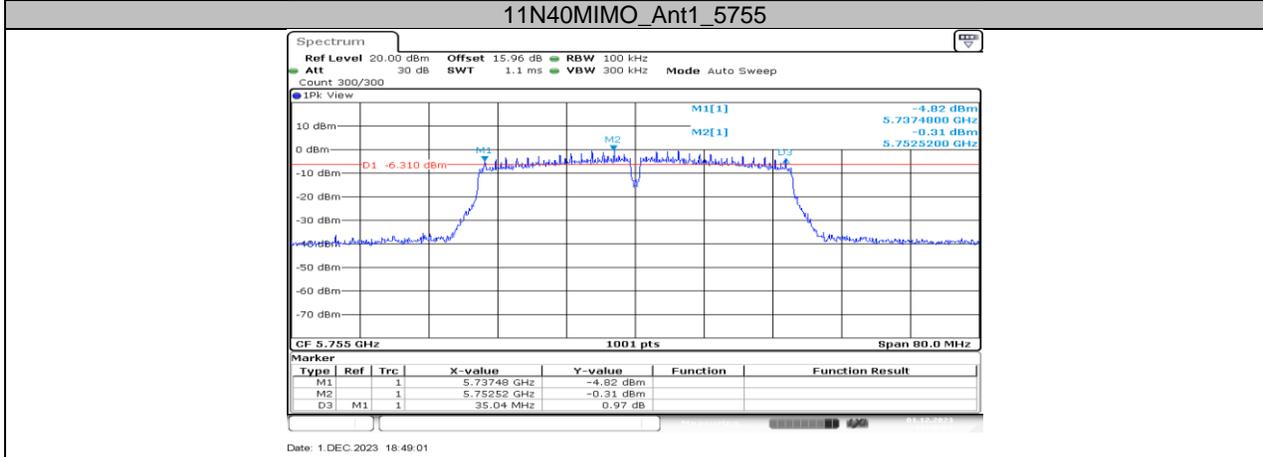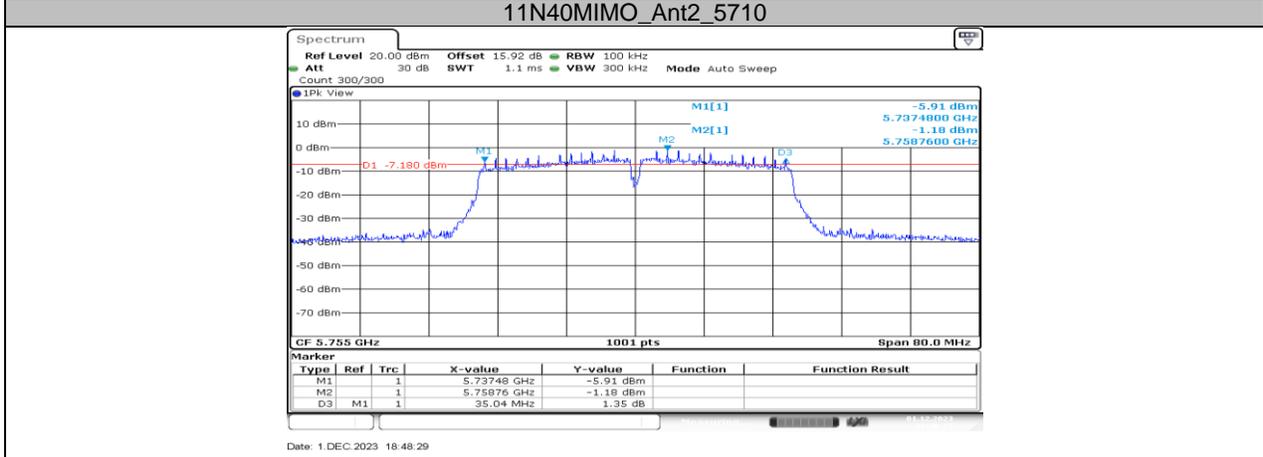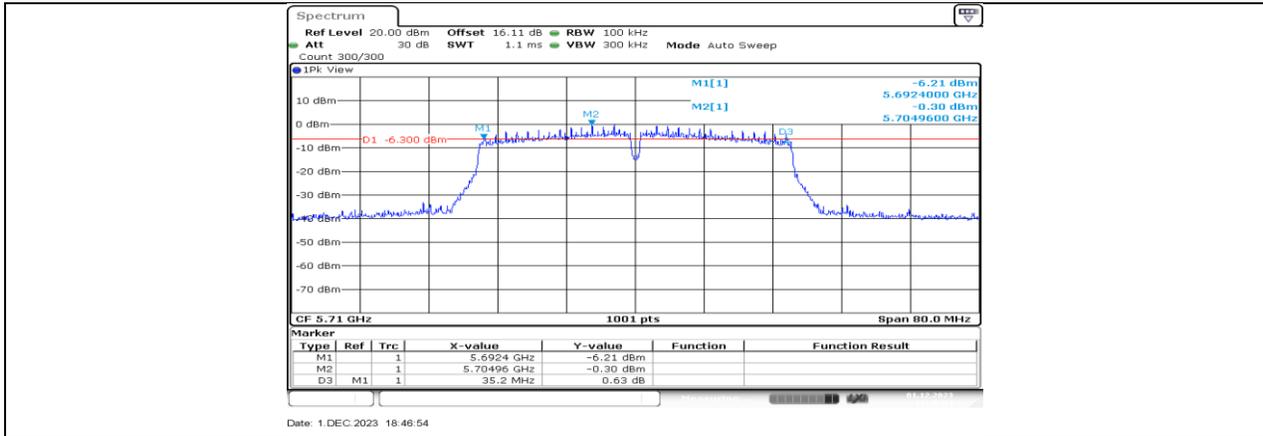


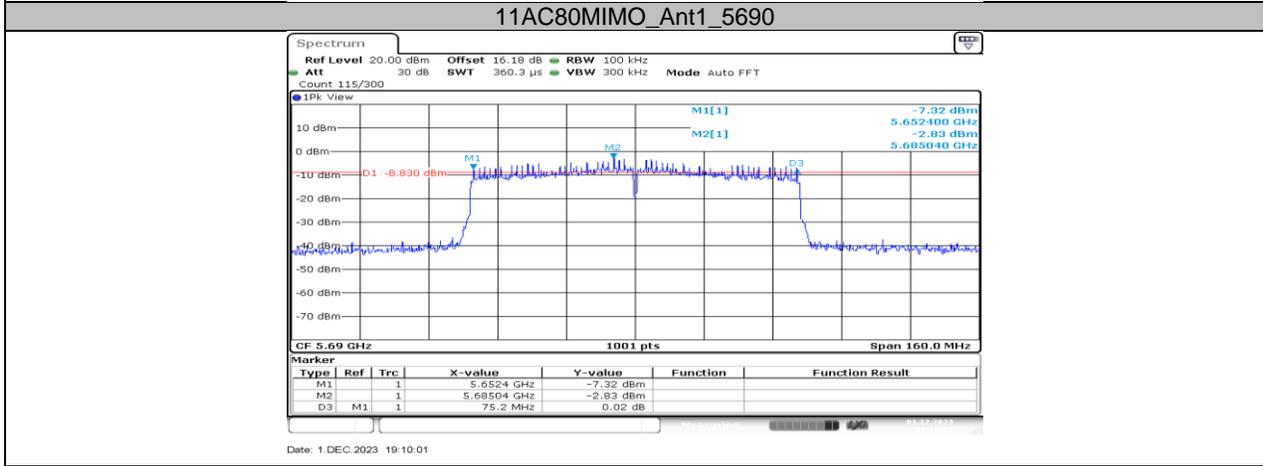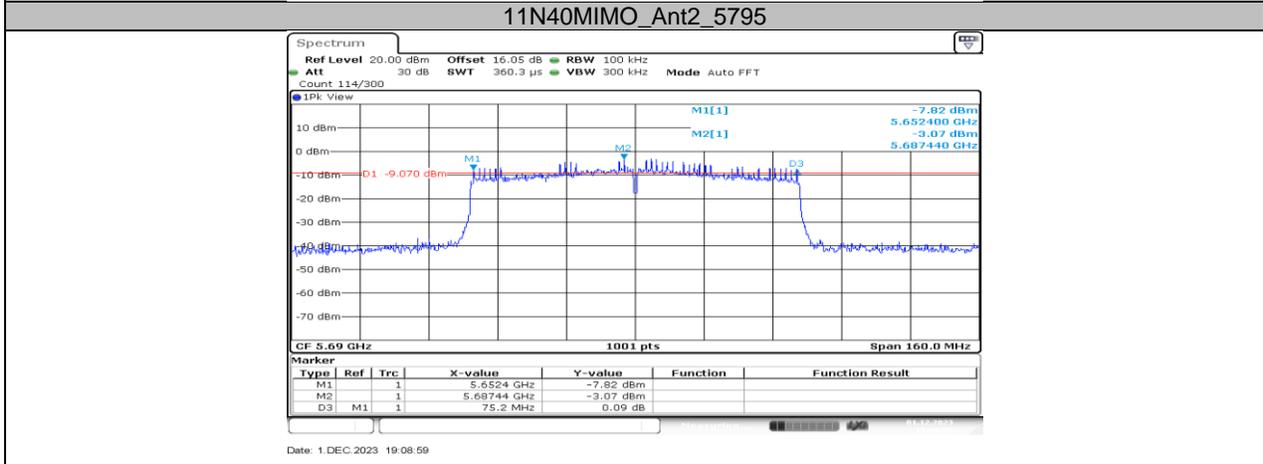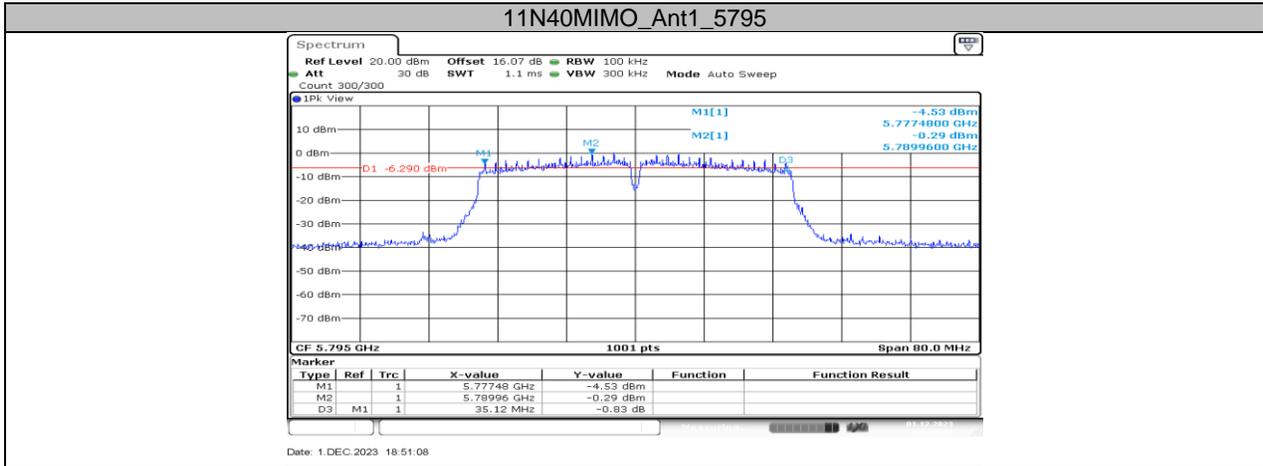

11AC80MIMO_Ant2_5690

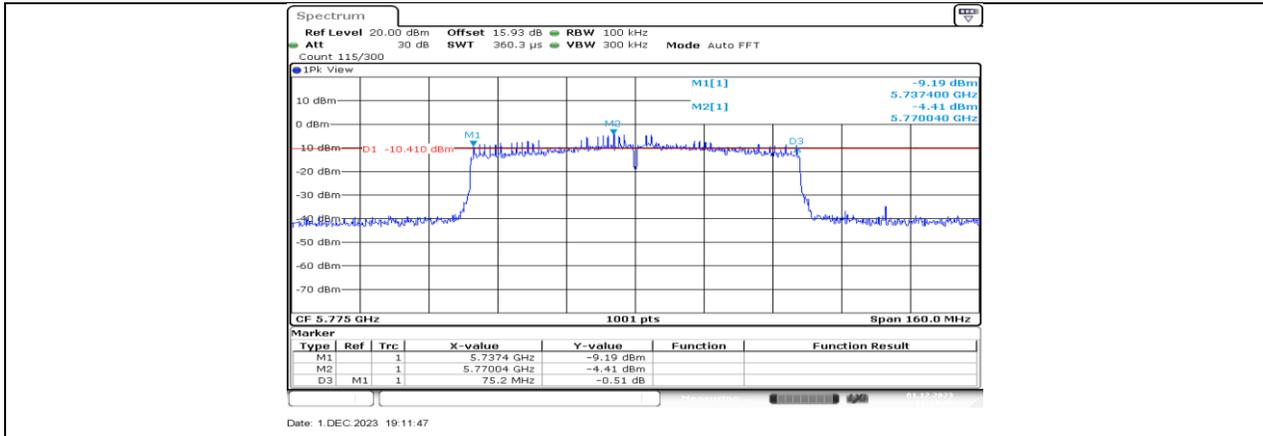

11AC80MIMO_Ant1_5775

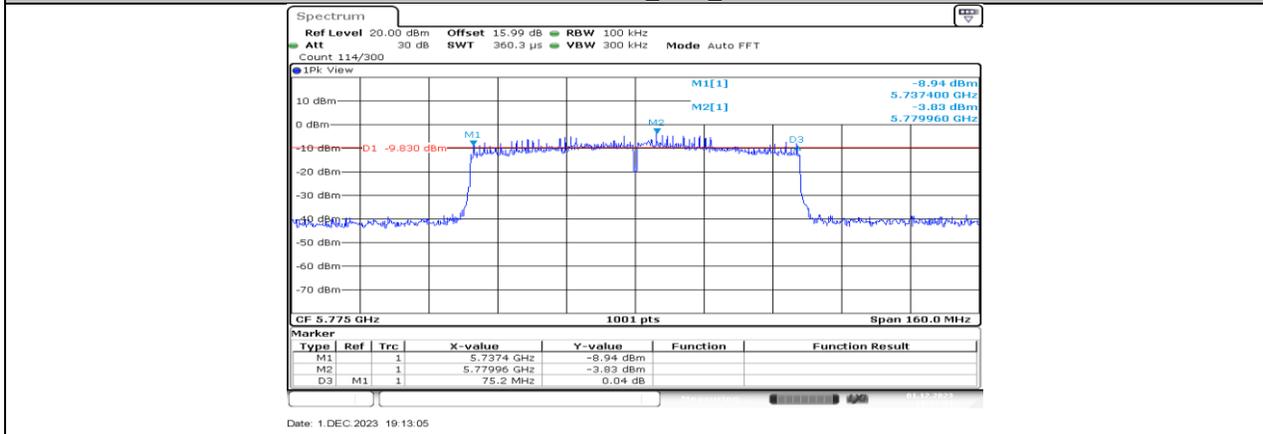

11AC80MIMO_Ant2_5775

11.4. APPENDIX D: MAXIMUM CONDUCTED OUTPUT POWER

11.4.1. Test Result

Test Mode	Antenna	Frequency[MHz]	Power [dBm]	FCC Limit [dBm]	ISED Limit [dBm]	EIRP [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	14.00	≤23.98	---	18.01	≤22.35	PASS
	Ant2	5180	14.69	≤23.98	---	17.82	≤22.32	PASS
	Ant1	5200	13.83	≤23.98	---	17.84	≤22.48	PASS
	Ant2	5200	14.38	≤23.98	---	17.51	≤22.36	PASS
	Ant1	5240	14.12	≤23.98	---	18.13	≤22.41	PASS
	Ant2	5240	14.89	≤23.98	---	18.02	≤22.34	PASS
	Ant1	5260	14.44	≤23.98	≤23.38	18.45	≤29.38	PASS
	Ant2	5260	14.74	≤23.98	≤23.33	17.87	≤29.33	PASS
	Ant1	5280	14.60	≤23.98	≤23.37	18.61	≤29.37	PASS
	Ant2	5280	14.78	≤23.98	≤23.33	17.91	≤29.33	PASS
	Ant1	5320	14.38	≤23.98	≤23.35	18.39	≤29.35	PASS
	Ant2	5320	14.29	≤23.98	≤23.34	17.42	≤29.34	PASS
	Ant1	5500	14.42	≤23.98	≤23.35	18.43	≤29.35	PASS
	Ant2	5500	14.76	≤23.98	≤23.34	17.89	≤29.34	PASS
	Ant1	5580	14.70	≤23.98	≤23.36	18.71	≤29.36	PASS
	Ant2	5580	14.43	≤23.98	≤23.35	17.56	≤29.35	PASS
	Ant1	5700	14.30	≤23.98	≤23.37	18.31	≤29.37	PASS
	Ant2	5700	14.51	≤23.98	≤23.35	17.64	≤29.35	PASS
	Ant1	5720_UNII-2C	11.70	≤22.76	≤22.35	15.71	≤28.35	PASS
	Ant2	5720_UNII-2C	11.78	≤22.82	≤22.33	14.91	≤28.33	PASS
	Ant1	5720_UNII-3	3.87	≤30.00	≤30.00	7.88	---	PASS
	Ant2	5720_UNII-3	3.98	≤30.00	≤30.00	7.11	---	PASS
	Ant1	5745	14.69	≤30.00	≤30.00	18.70	---	PASS
	Ant2	5745	14.59	≤30.00	≤30.00	17.72	---	PASS
	Ant1	5785	14.56	≤30.00	≤30.00	18.57	---	PASS
	Ant2	5785	14.71	≤30.00	≤30.00	17.84	---	PASS
	Ant1	5825	14.46	≤30.00	≤30.00	18.47	---	PASS
	Ant2	5825	14.81	≤30.00	≤30.00	17.94	---	PASS
11N20MIMO	Ant1	5180	9.67	≤23.98	---	13.68	≤22.55	PASS
	Ant2	5180	11.48	≤23.98	---	15.49	≤22.50	PASS
	total	5180	13.68	≤23.98	---	17.69	≤22.50	PASS
	Ant1	5200	9.51	≤23.98	---	13.52	≤22.58	PASS
	Ant2	5200	11.96	≤23.98	---	15.97	≤22.50	PASS
	total	5200	13.92	≤23.98	---	17.93	≤22.50	PASS
	Ant1	5240	10.20	≤23.98	---	14.21	≤22.58	PASS
	Ant2	5240	11.47	≤23.98	---	15.48	≤22.49	PASS
	total	5240	13.89	≤23.98	---	17.90	≤22.49	PASS
	Ant1	5260	14.00	≤23.98	≤23.56	18.01	≤29.56	PASS
	Ant2	5260	14.64	≤23.98	≤23.51	18.65	≤29.51	PASS
	total	5260	17.34	≤23.98	≤23.51	21.35	≤29.51	PASS
	Ant1	5280	14.02	≤23.98	≤23.59	18.03	≤29.59	PASS
	Ant2	5280	14.67	≤23.98	≤23.51	18.68	≤29.51	PASS
	total	5280	17.37	≤23.98	≤23.51	21.38	≤29.51	PASS
	Ant1	5320	13.85	≤23.98	≤23.57	17.86	≤29.57	PASS
	Ant2	5320	14.28	≤23.98	≤23.50	18.29	≤29.50	PASS
	total	5320	17.08	≤23.98	≤23.50	21.09	≤29.50	PASS
	Ant1	5500	14.52	≤23.98	≤23.56	18.53	≤29.56	PASS
	Ant2	5500	14.68	≤23.98	≤23.50	18.69	≤29.50	PASS
	total	5500	17.61	≤23.98	≤23.50	21.62	≤29.50	PASS
	Ant1	5580	14.20	≤23.98	≤23.58	18.21	≤29.58	PASS
	Ant2	5580	14.44	≤23.98	≤23.50	18.45	≤29.50	PASS
	total	5580	17.33	≤23.98	≤23.50	21.34	≤29.50	PASS
	Ant1	5700	14.26	≤23.98	≤23.56	18.27	≤29.56	PASS
	Ant2	5700	14.50	≤23.98	≤23.51	18.51	≤29.51	PASS
	total	5700	17.39	≤23.98	≤23.51	21.40	≤29.51	PASS
	Ant1	5720_UNII-2C	11.16	≤22.77	≤22.47	15.17	≤28.47	PASS


	Ant2	5720_UNII-2C	11.58	≤22.81	≤22.43	15.59	≤28.43	PASS
	total	5720_UNII-2C	14.39	≤23.98	≤22.43	18.40	≤28.43	PASS
	Ant1	5720_UNII-3	3.63	≤30.00	≤30.00	7.64	---	PASS
	Ant2	5720_UNII-3	4.31	≤30.00	≤30.00	8.32	---	PASS
	total	5720_UNII-3	6.99	≤30.00	≤30.00	11.00	---	PASS
	Ant1	5745	13.68	≤30.00	≤30.00	17.69	---	PASS
	Ant2	5745	14.51	≤30.00	≤30.00	18.52	---	PASS
	total	5745	17.13	≤30.00	≤30.00	21.14	---	PASS
	Ant1	5785	13.82	≤30.00	≤30.00	17.83	---	PASS
	Ant2	5785	14.22	≤30.00	≤30.00	18.23	---	PASS
	total	5785	17.03	≤30.00	≤30.00	21.04	---	PASS
	Ant1	5825	13.94	≤30.00	≤30.00	17.95	---	PASS
	Ant2	5825	14.34	≤30.00	≤30.00	18.35	---	PASS
	total	5825	17.15	≤30.00	≤30.00	21.16	---	PASS
	11N40MIMO	Ant1	5190	12.43	≤23.98	---	16.44	≤23.00
Ant2		5190	14.57	≤23.98	---	18.58	≤23.00	PASS
total		5190	16.64	≤23.98	---	20.65	≤23.00	PASS
Ant1		5230	12.90	≤23.98	---	16.91	≤23.00	PASS
Ant2		5230	14.31	≤23.98	---	18.32	≤23.00	PASS
total		5230	16.67	≤23.98	---	20.68	≤23.00	PASS
Ant1		5270	14.23	≤23.98	≤24.00	18.24	≤30.00	PASS
Ant2		5270	14.81	≤23.98	≤24.00	18.82	≤30.00	PASS
total		5270	17.54	≤23.98	≤24.00	21.55	≤30.00	PASS
Ant1		5310	13.97	≤23.98	≤24.00	17.98	≤30.00	PASS
Ant2		5310	14.51	≤23.98	≤24.00	18.52	≤30.00	PASS
total		5310	17.26	≤23.98	≤24.00	21.27	≤30.00	PASS
Ant1		5510	14.64	≤23.98	≤24.00	18.65	≤30.00	PASS
Ant2		5510	14.83	≤23.98	≤24.00	18.84	≤30.00	PASS
total		5510	17.75	≤23.98	≤24.00	21.76	≤30.00	PASS
Ant1		5550	14.59	≤23.98	≤24.00	18.60	≤30.00	PASS
Ant2		5550	14.40	≤23.98	≤24.00	18.41	≤30.00	PASS
total		5550	17.51	≤23.98	≤24.00	21.52	≤30.00	PASS
Ant1		5670	14.35	≤23.98	≤24.00	18.36	≤30.00	PASS
Ant2		5670	14.63	≤23.98	≤24.00	18.64	≤30.00	PASS
total		5670	17.50	≤23.98	≤24.00	21.51	≤30.00	PASS
Ant1		5710_UNII-2C	12.16	≤23.98	≤24.00	16.17	≤30.00	PASS
Ant2		5710_UNII-2C	12.37	≤23.98	≤24.00	16.38	≤30.00	PASS
total		5710_UNII-2C	15.28	≤23.98	≤24.00	19.29	≤30.00	PASS
Ant1		5710_UNII-3	-0.65	≤30.00	≤30.00	3.36	---	PASS
Ant2		5710_UNII-3	-0.05	≤30.00	≤30.00	3.96	---	PASS
total		5710_UNII-3	2.67	≤30.00	≤30.00	6.68	---	PASS
Ant1		5755	13.49	≤30.00	≤30.00	17.50	---	PASS
Ant2		5755	14.19	≤30.00	≤30.00	18.20	---	PASS
total		5755	16.86	≤30.00	≤30.00	20.87	---	PASS
Ant1	5795	14.13	≤30.00	≤30.00	18.14	---	PASS	
Ant2	5795	14.21	≤30.00	≤30.00	18.22	---	PASS	
total	5795	17.18	≤30.00	≤30.00	21.19	---	PASS	
11AC80MIMO	Ant1	5210	11.04	≤23.98	---	15.05	≤23.00	PASS
	Ant2	5210	12.93	≤23.98	---	16.94	≤23.00	PASS
	total	5210	15.10	≤23.98	---	19.11	≤23.00	PASS
	Ant1	5290	12.80	≤23.98	≤24.00	16.81	≤30.00	PASS
	Ant2	5290	13.37	≤23.98	≤24.00	17.38	≤30.00	PASS
	total	5290	16.10	≤23.98	≤24.00	20.11	≤30.00	PASS
	Ant1	5530	13.63	≤23.98	≤24.00	17.64	≤30.00	PASS
	Ant2	5530	13.74	≤23.98	≤24.00	17.75	≤30.00	PASS
	total	5530	16.70	≤23.98	≤24.00	20.71	≤30.00	PASS
	Ant1	5610	13.29	≤23.98	≤24.00	17.30	≤30.00	PASS
	Ant2	5610	14.04	≤23.98	≤24.00	18.05	≤30.00	PASS
	total	5610	16.69	≤23.98	≤24.00	20.70	≤30.00	PASS
	Ant1	5690_UNII-2C	12.36	≤23.98	≤24.00	16.37	≤30.00	PASS
	Ant2	5690_UNII-2C	12.38	≤23.98	≤24.00	16.39	≤30.00	PASS
	total	5690_UNII-2C	15.38	≤23.98	≤24.00	19.39	≤30.00	PASS
	Ant1	5690_UNII-3	-3.95	≤30.00	≤30.00	0.06	---	PASS
	Ant2	5690_UNII-3	-3.55	≤30.00	≤30.00	0.46	---	PASS


	total	5690_UNII-3	-0.74	≤30.00	≤30.00	3.27	---	PASS
	Ant1	5775	13.17	≤30.00	≤30.00	17.18	---	PASS
	Ant2	5775	13.58	≤30.00	≤30.00	17.59	---	PASS
	total	5775	16.39	≤30.00	≤30.00	20.40	---	PASS

Note: 1. Conducted Power=Meas. Level+ Correction Factor


2. The Duty Cycle Factor (refer to section 7.1) had already compensated to the test data.

11.4.2. Test Graphs

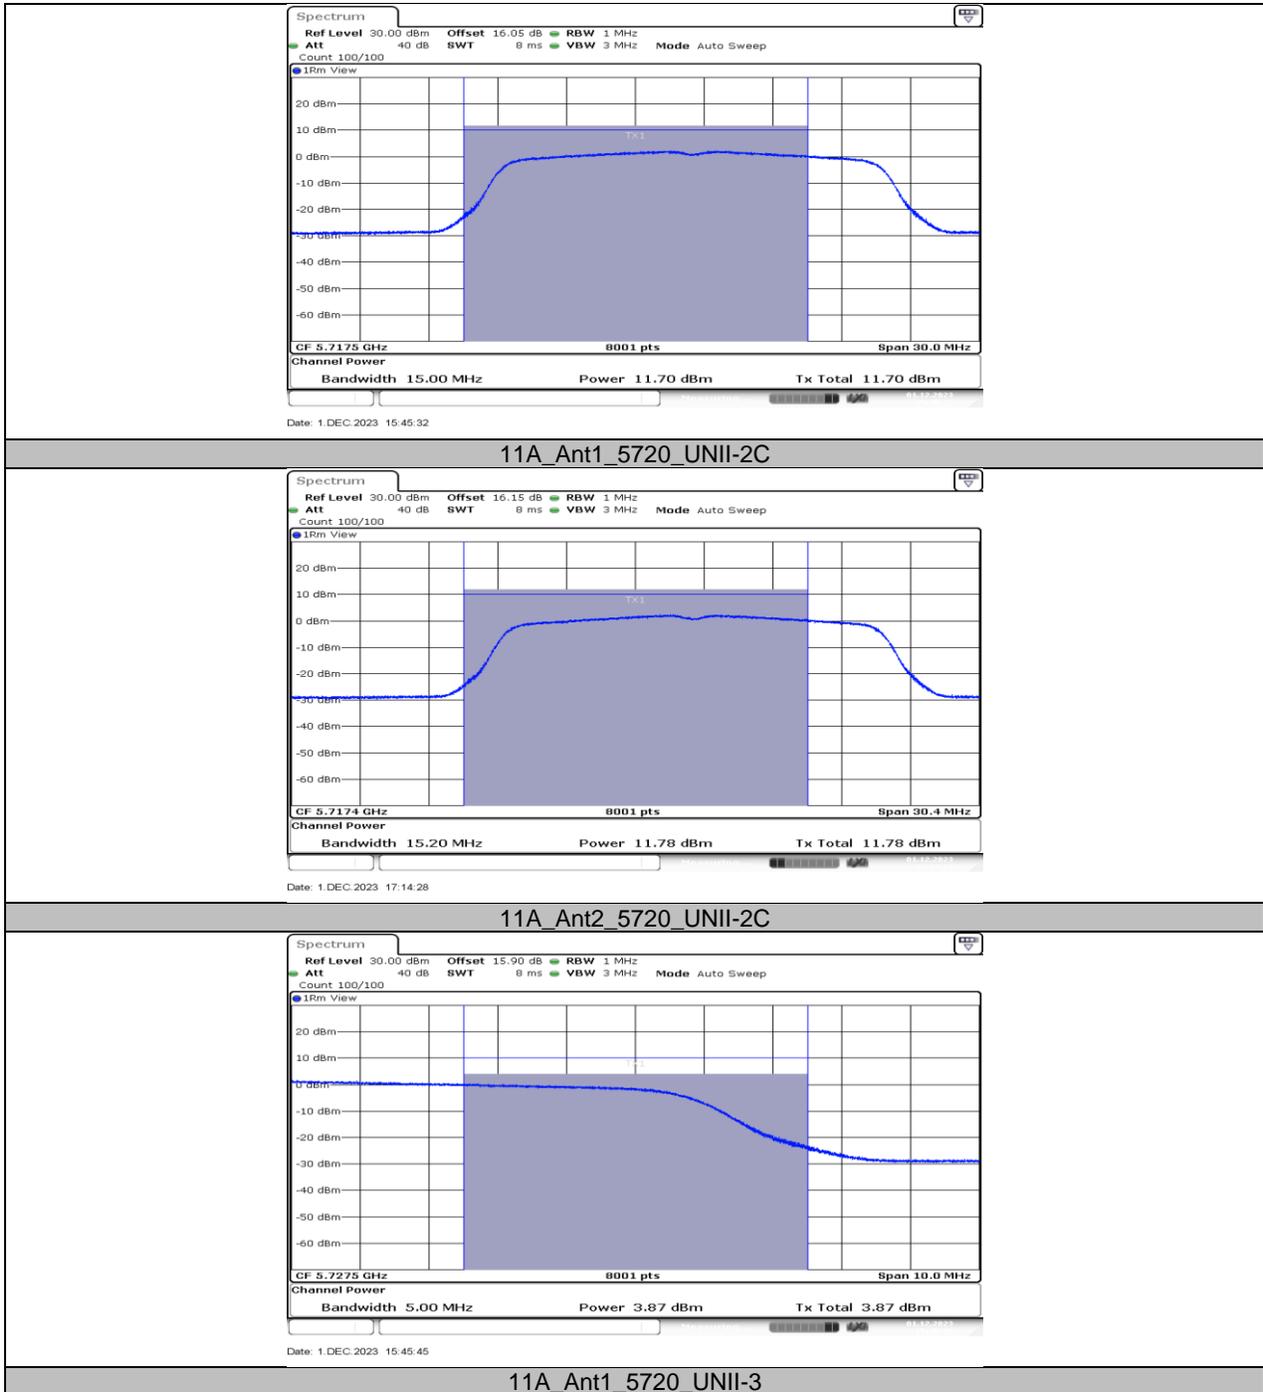


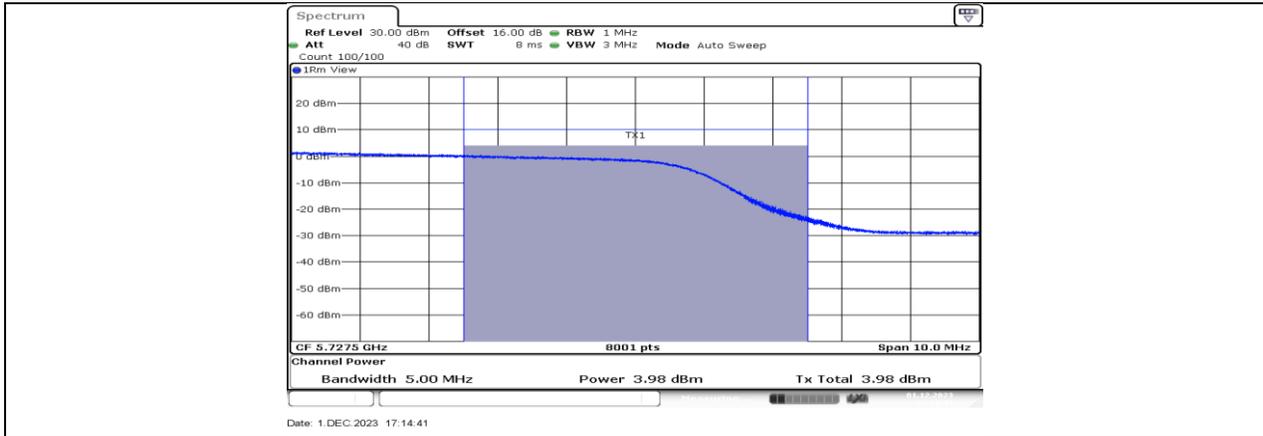


11A_Ant2_5720_UNII-3

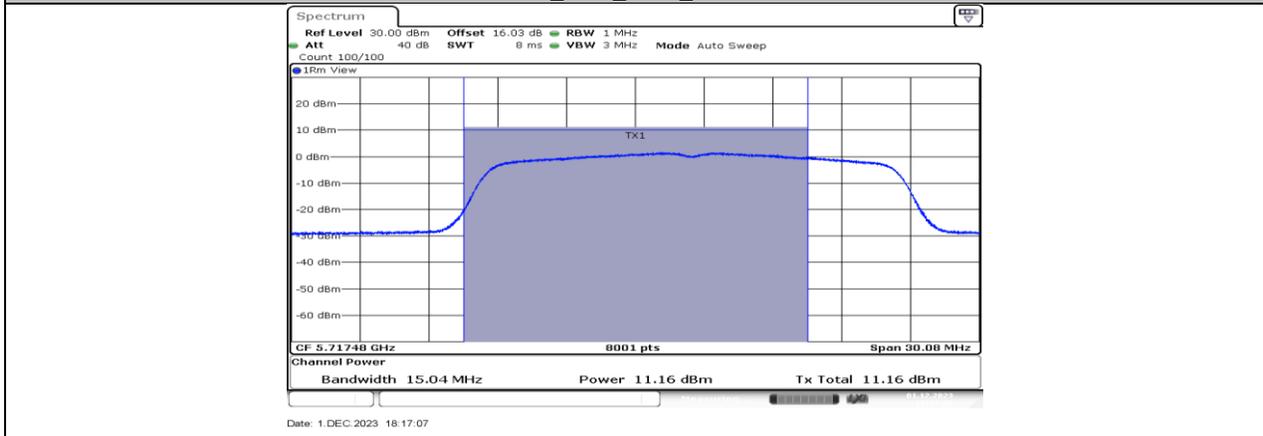






11N20MIMO_Ant1_5720_UNII-2C

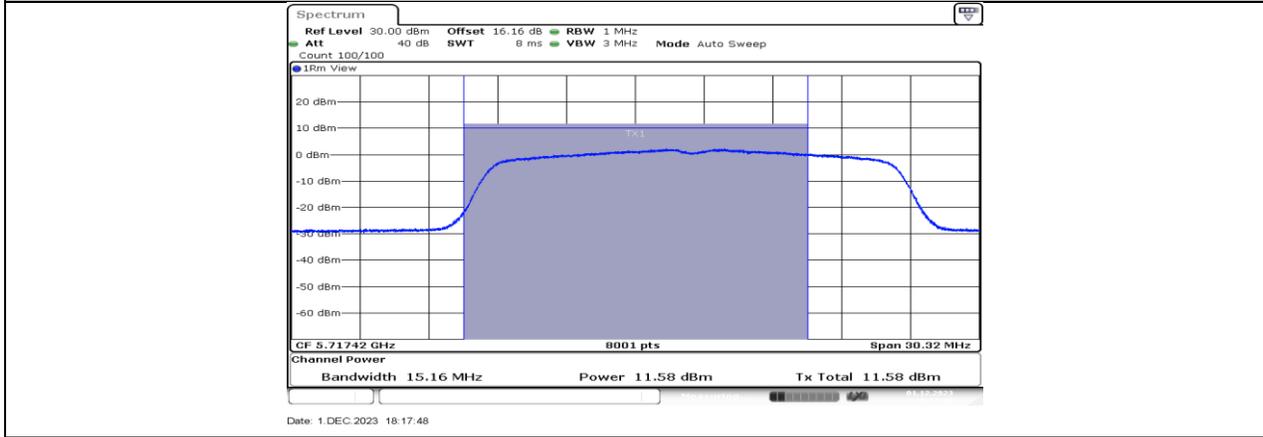


11N20MIMO_Ant2_5720_UNII-2C

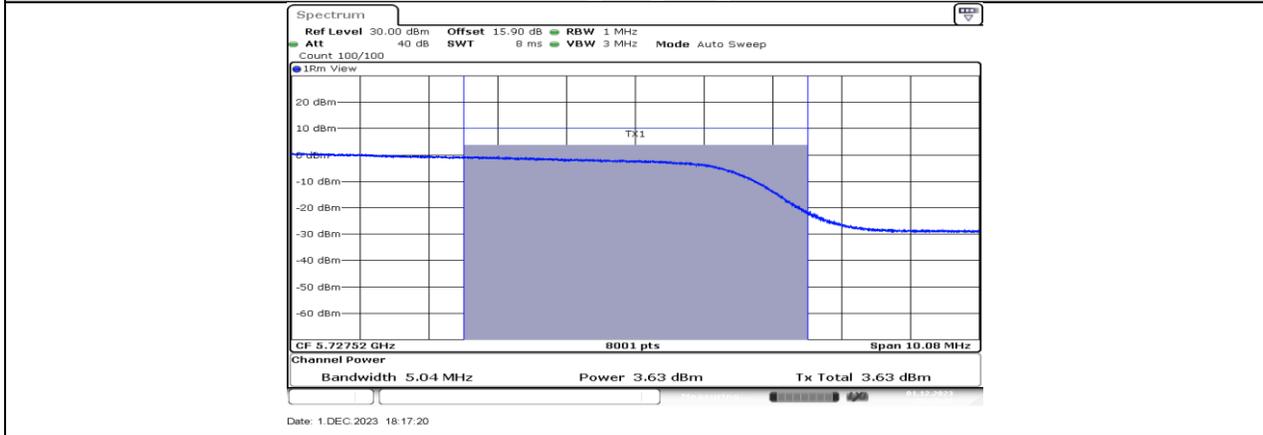

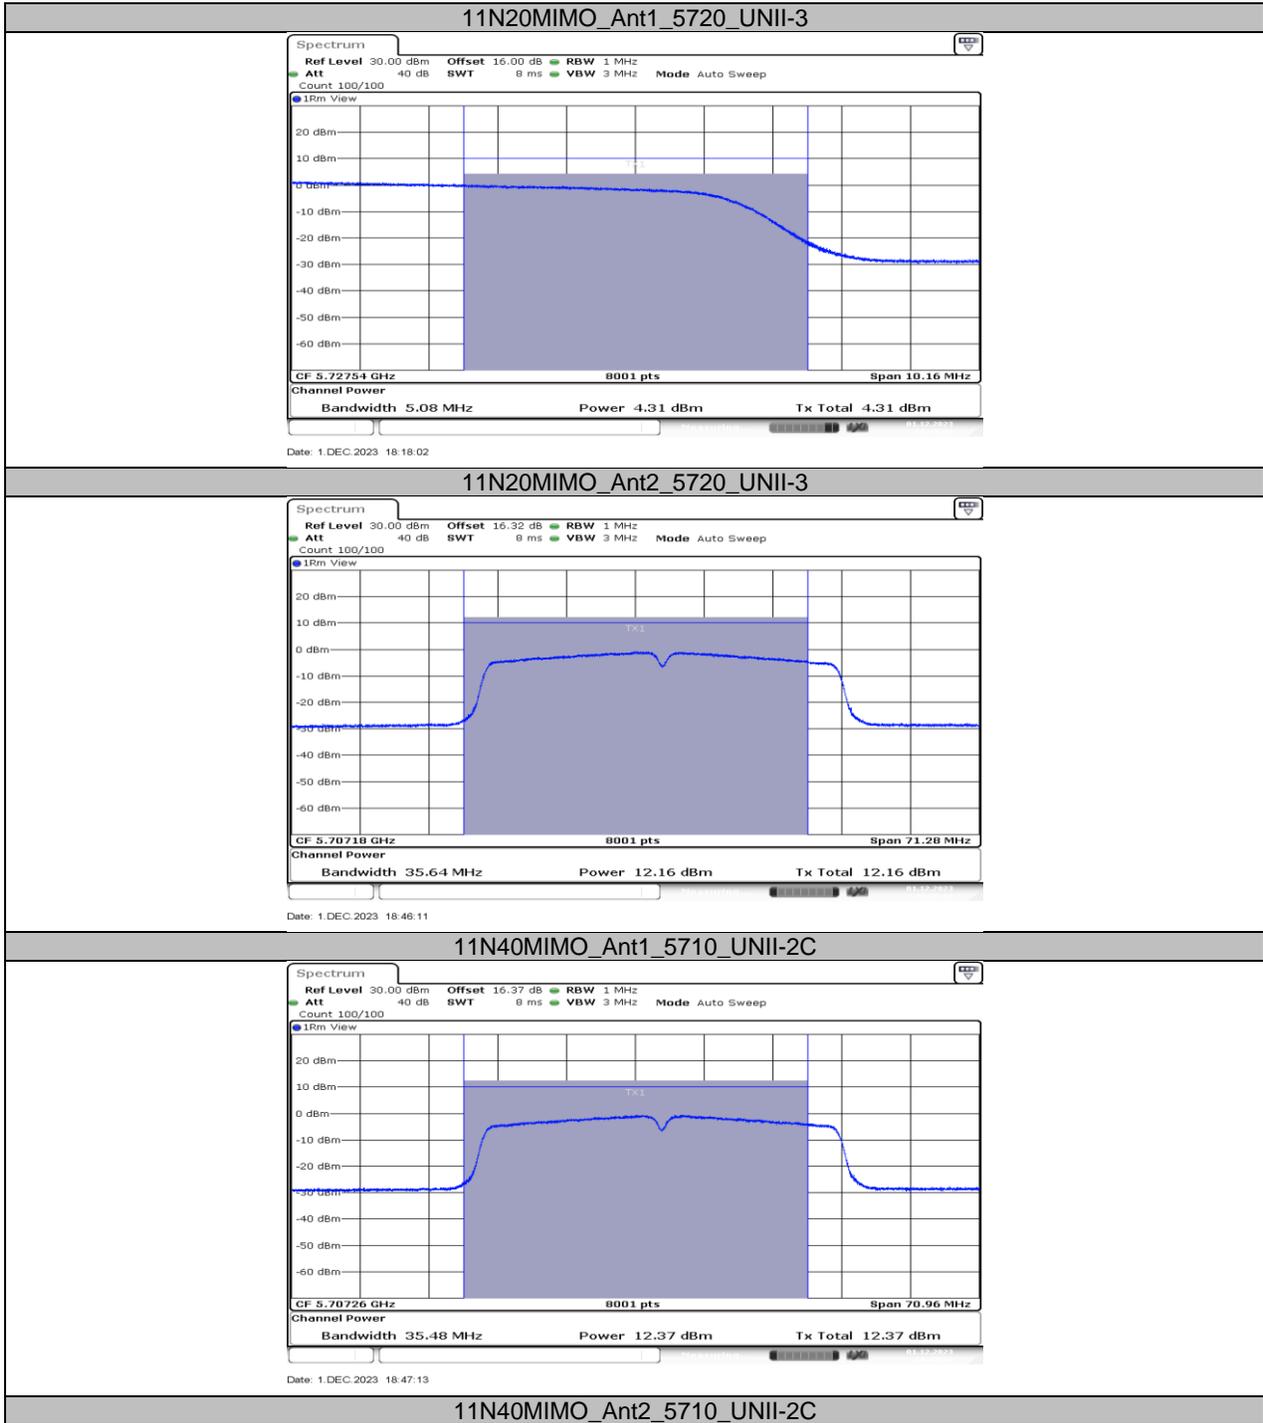

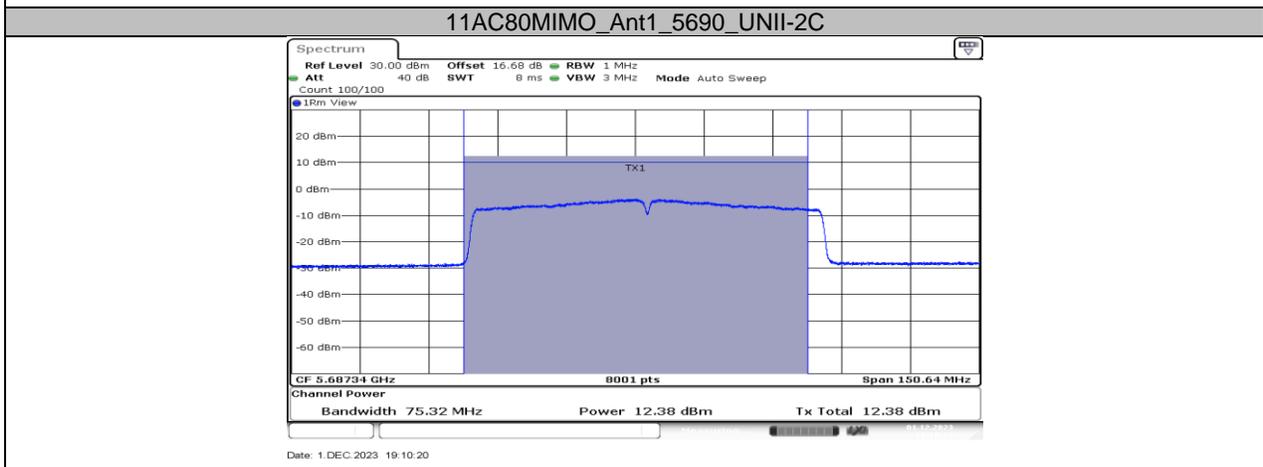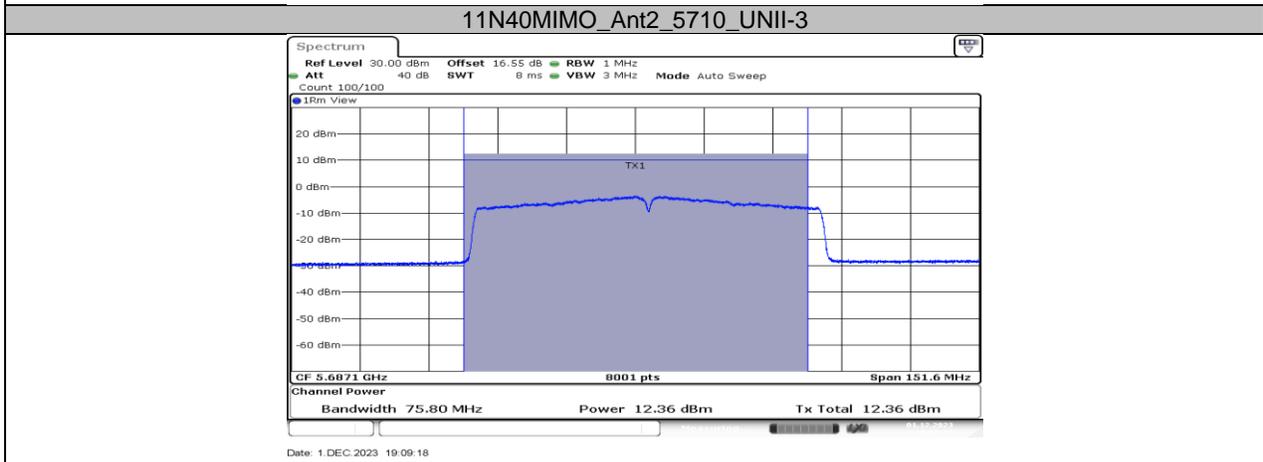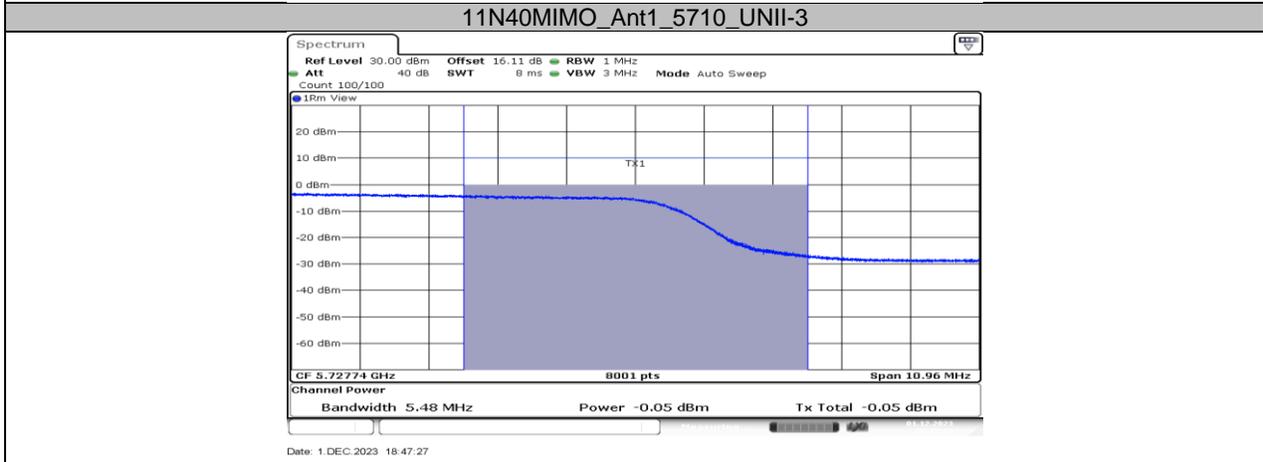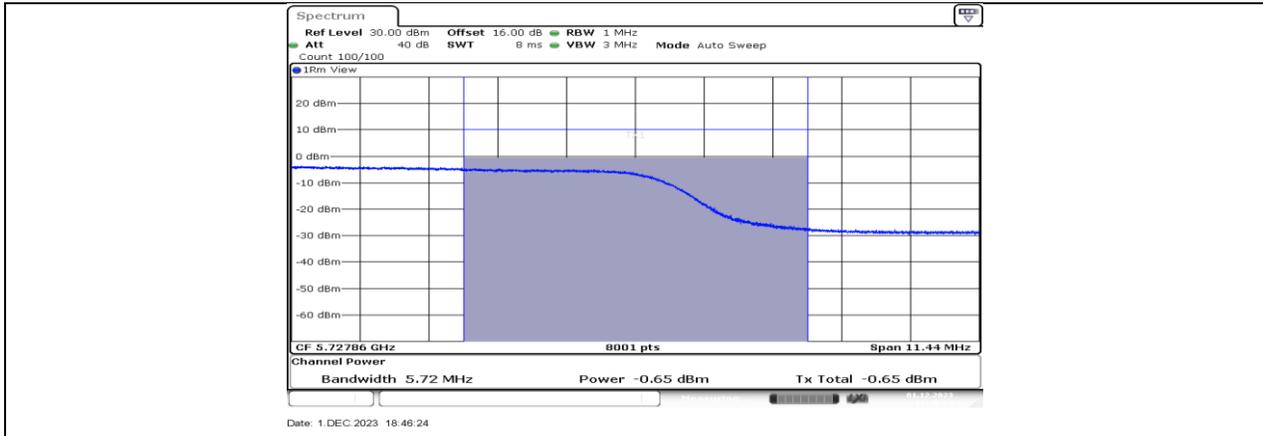

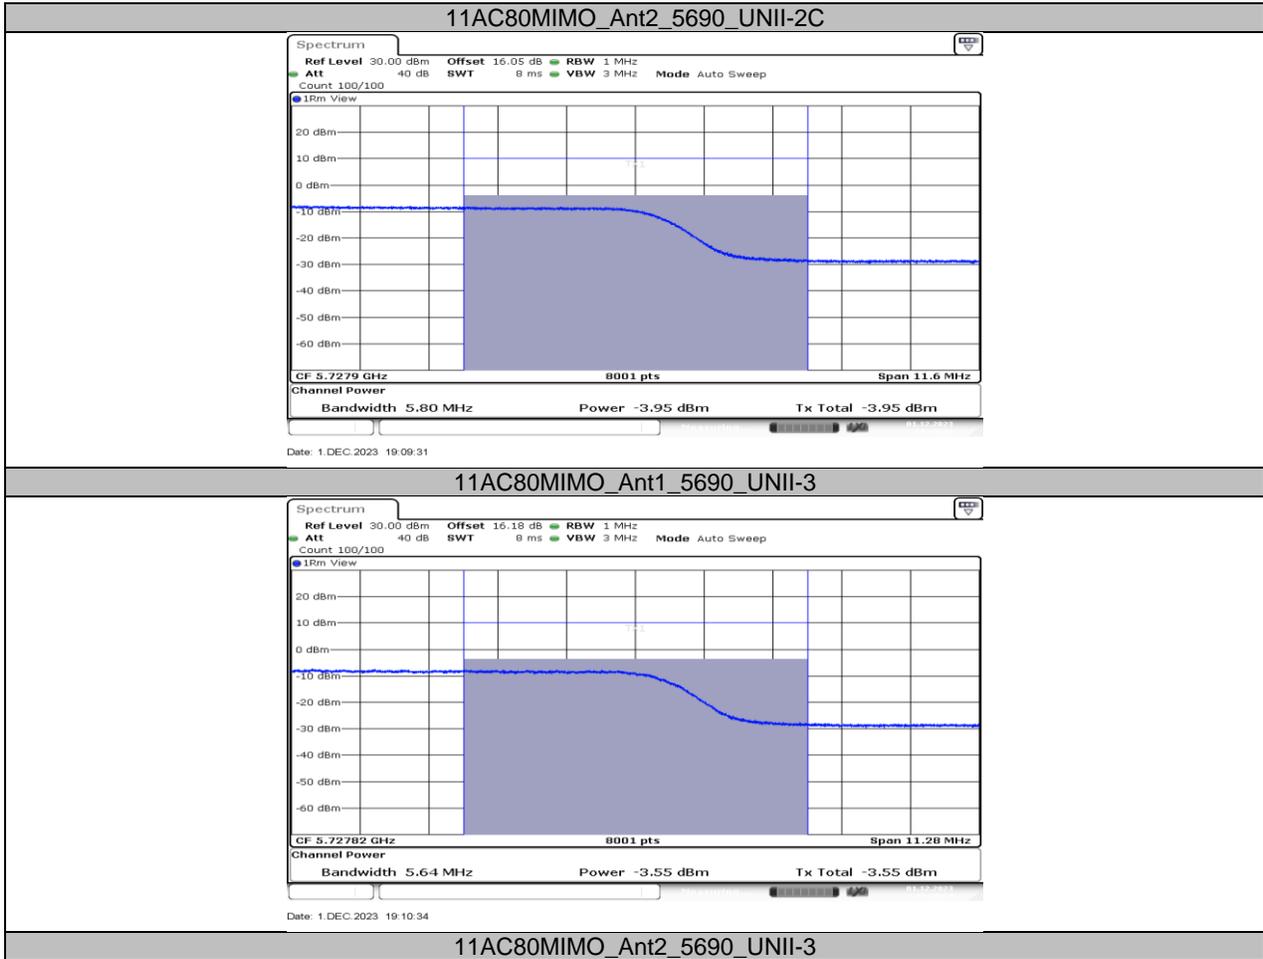

11.5. APPENDIX E: MAXIMUM POWER SPECTRAL DENSITY

11.5.1. Test Result

Test Mode	Antenna	Frequency[MHz]	Power [dBm/MHz]	Limit [dBm/MHz]	EIRP [dBm/MHz]	Limit [dBm/MHz]	Verdict	
11A	Ant1	5180	2.45	≤11.00	6.46	≤10.00	PASS	
	Ant2	5180	3.00	≤11.00	6.13	≤10.00	PASS	
	Ant1	5200	2.40	≤11.00	6.41	≤10.00	PASS	
	Ant2	5200	2.47	≤11.00	5.60	≤10.00	PASS	
	Ant1	5240	2.39	≤11.00	6.40	≤10.00	PASS	
	Ant2	5240	3.06	≤11.00	6.19	≤10.00	PASS	
	Ant1	5260	2.64	≤11.00	6.65	---	PASS	
	Ant2	5260	3.10	≤11.00	6.23	---	PASS	
	Ant1	5280	2.81	≤11.00	6.82	---	PASS	
	Ant2	5280	3.25	≤11.00	6.38	---	PASS	
	Ant1	5320	2.49	≤11.00	6.50	---	PASS	
	Ant2	5320	2.68	≤11.00	5.81	---	PASS	
	Ant1	5500	2.34	≤11.00	6.35	---	PASS	
	Ant2	5500	2.83	≤11.00	5.96	---	PASS	
	Ant1	5580	2.97	≤11.00	6.98	---	PASS	
	Ant2	5580	2.67	≤11.00	5.80	---	PASS	
	Ant1	5700	2.46	≤11.00	6.47	---	PASS	
	Ant2	5700	2.61	≤11.00	5.74	---	PASS	
	Ant1	5720_UNII-2C	1.96	≤11.00	5.97	---	PASS	
	Ant2	5720_UNII-2C	2.18	≤11.00	5.31	---	PASS	
	Ant1	5720_UNII-3	-2.61	≤30.00	1.40	---	PASS	
	Ant2	5720_UNII-3	-2.43	≤30.00	0.70	---	PASS	
	Ant1	5745	-0.26	≤30.00	3.75	---	PASS	
	Ant2	5745	-0.03	≤30.00	3.10	---	PASS	
	Ant1	5785	-0.17	≤30.00	3.84	---	PASS	
	Ant2	5785	-0.06	≤30.00	3.07	---	PASS	
	Ant1	5825	-0.19	≤30.00	3.82	---	PASS	
	Ant2	5825	-0.02	≤30.00	3.11	---	PASS	
	11N20MIMO	Ant1	5180	-1.96	≤11.00	2.05	≤10.00	PASS
		Ant2	5180	-0.36	≤11.00	3.65	≤10.00	PASS
total		5180	1.92	≤9.98	8.94	≤10.00	PASS	
Ant1		5200	-1.99	≤11.00	2.02	≤10.00	PASS	
Ant2		5200	-0.16	≤11.00	3.85	≤10.00	PASS	
total		5200	2.03	≤9.98	9.05	≤10.00	PASS	
Ant1		5240	-1.81	≤11.00	2.20	≤10.00	PASS	
Ant2		5240	-0.52	≤11.00	3.49	≤10.00	PASS	
total		5240	1.89	≤9.98	8.91	≤10.00	PASS	
Ant1		5260	1.90	≤11.00	5.91	---	PASS	
Ant2		5260	2.89	≤11.00	6.90	---	PASS	
total		5260	5.43	≤9.98	12.45	---	PASS	
Ant1		5280	2.36	≤11.00	6.37	---	PASS	
Ant2		5280	2.92	≤11.00	6.93	---	PASS	
total		5280	5.66	≤9.98	12.68	---	PASS	
Ant1		5320	1.95	≤11.00	5.96	---	PASS	
Ant2		5320	2.51	≤11.00	6.52	---	PASS	
total		5320	5.25	≤9.98	12.27	---	PASS	
Ant1		5500	2.31	≤11.00	6.32	---	PASS	
Ant2		5500	2.58	≤11.00	6.59	---	PASS	
total		5500	5.46	≤9.98	12.48	---	PASS	
Ant1		5580	2.32	≤11.00	6.33	---	PASS	
Ant2		5580	2.46	≤11.00	6.47	---	PASS	
total		5580	5.40	≤9.98	12.42	---	PASS	
Ant1		5700	2.51	≤11.00	6.52	---	PASS	
Ant2		5700	2.53	≤11.00	6.54	---	PASS	
total		5700	5.53	≤9.98	12.55	---	PASS	
Ant1		5720_UNII-2C	1.10	≤11.00	5.11	---	PASS	
Ant2		5720_UNII-2C	1.85	≤11.00	5.86	---	PASS	
total		5720_UNII-2C	4.50	≤9.98	11.52	---	PASS	


	Ant1	5720_UNII-3	-3.37	≤30.00	0.64	---	PASS
	Ant2	5720_UNII-3	-2.85	≤30.00	1.16	---	PASS
	total	5720_UNII-3	-0.09	≤28.98	6.93	---	PASS
	Ant1	5745	-1.33	≤30.00	2.68	---	PASS
	Ant2	5745	-0.36	≤30.00	3.65	---	PASS
	total	5745	2.19	≤28.98	9.21	---	PASS
	Ant1	5785	-1.14	≤30.00	2.87	---	PASS
	Ant2	5785	-0.87	≤30.00	3.14	---	PASS
	total	5785	2.01	≤28.98	9.03	---	PASS
	Ant1	5825	-0.97	≤30.00	3.04	---	PASS
	Ant2	5825	-0.54	≤30.00	3.47	---	PASS
	total	5825	2.26	≤28.98	9.28	---	PASS
11N40MIMO	Ant1	5190	-1.98	≤11.00	2.03	≤10.00	PASS
	Ant2	5190	-0.24	≤11.00	3.77	≤10.00	PASS
	total	5190	1.99	≤9.98	9.01	≤10.00	PASS
	Ant1	5230	-1.86	≤11.00	2.15	≤10.00	PASS
	Ant2	5230	-0.69	≤11.00	3.32	≤10.00	PASS
	total	5230	1.77	≤9.98	8.79	≤10.00	PASS
	Ant1	5270	-0.28	≤11.00	3.73	---	PASS
	Ant2	5270	0.22	≤11.00	4.23	---	PASS
	total	5270	2.99	≤9.98	10.01	---	PASS
	Ant1	5310	-0.67	≤11.00	3.34	---	PASS
	Ant2	5310	-0.10	≤11.00	3.91	---	PASS
	total	5310	2.63	≤9.98	9.65	---	PASS
	Ant1	5510	-0.51	≤11.00	3.50	---	PASS
	Ant2	5510	-0.15	≤11.00	3.86	---	PASS
	total	5510	2.68	≤9.98	9.70	---	PASS
	Ant1	5550	0.01	≤11.00	4.02	---	PASS
	Ant2	5550	-0.17	≤11.00	3.84	---	PASS
	total	5550	2.93	≤9.98	9.95	---	PASS
	Ant1	5670	-0.33	≤11.00	3.68	---	PASS
	Ant2	5670	-0.21	≤11.00	3.80	---	PASS
	total	5670	2.74	≤9.98	9.76	---	PASS
	Ant1	5710_UNII-2C	-0.76	≤11.00	3.25	---	PASS
	Ant2	5710_UNII-2C	-0.88	≤11.00	3.13	---	PASS
	total	5710_UNII-2C	2.19	≤9.98	9.21	---	PASS
	Ant1	5710_UNII-3	-7.47	≤30.00	-3.46	---	PASS
	Ant2	5710_UNII-3	-6.70	≤30.00	-2.69	---	PASS
	total	5710_UNII-3	-4.06	≤28.98	2.96	---	PASS
	Ant1	5755	-4.59	≤30.00	-0.58	---	PASS
	Ant2	5755	-3.97	≤30.00	0.04	---	PASS
	total	5755	-1.26	≤28.98	5.76	---	PASS
Ant1	5795	-3.80	≤30.00	0.21	---	PASS	
Ant2	5795	-3.63	≤30.00	0.38	---	PASS	
total	5795	-0.70	≤28.98	6.32	---	PASS	
11AC80MIMO	Ant1	5210	-6.54	≤11.00	-2.53	≤10.00	PASS
	Ant2	5210	-5.09	≤11.00	-1.08	≤10.00	PASS
	total	5210	-2.74	≤9.98	4.28	≤10.00	PASS
	Ant1	5290	-4.54	≤11.00	-0.53	---	PASS
	Ant2	5290	-4.18	≤11.00	-0.17	---	PASS
	total	5290	-1.35	≤9.98	5.67	---	PASS
	Ant1	5530	-3.97	≤11.00	0.04	---	PASS
	Ant2	5530	-3.81	≤11.00	0.20	---	PASS
	total	5530	-0.88	≤9.98	6.14	---	PASS
	Ant1	5610	-4.65	≤11.00	-0.64	---	PASS
	Ant2	5610	-3.91	≤11.00	0.10	---	PASS
	total	5610	-1.25	≤9.98	5.77	---	PASS
	Ant1	5690_UNII-2C	-3.61	≤11.00	0.40	---	PASS
	Ant2	5690_UNII-2C	-4.04	≤11.00	-0.03	---	PASS
	total	5690_UNII-2C	-0.81	≤9.98	6.21	---	PASS
	Ant1	5690_UNII-3	-10.95	≤30.00	-6.94	---	PASS
	Ant2	5690_UNII-3	-10.62	≤30.00	-6.61	---	PASS
	total	5690_UNII-3	-7.77	≤28.98	-0.75	---	PASS
Ant1	5775	-7.75	≤30.00	-3.74	---	PASS	


	Ant2	5775	-6.94	≤30.00	-2.93	---	PASS
	total	5775	-4.32	≤28.98	2.70	---	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.


2.The Duty Cycle Factor and RBW Factor is compensated in the graph.

11.5.2. Test Graphs

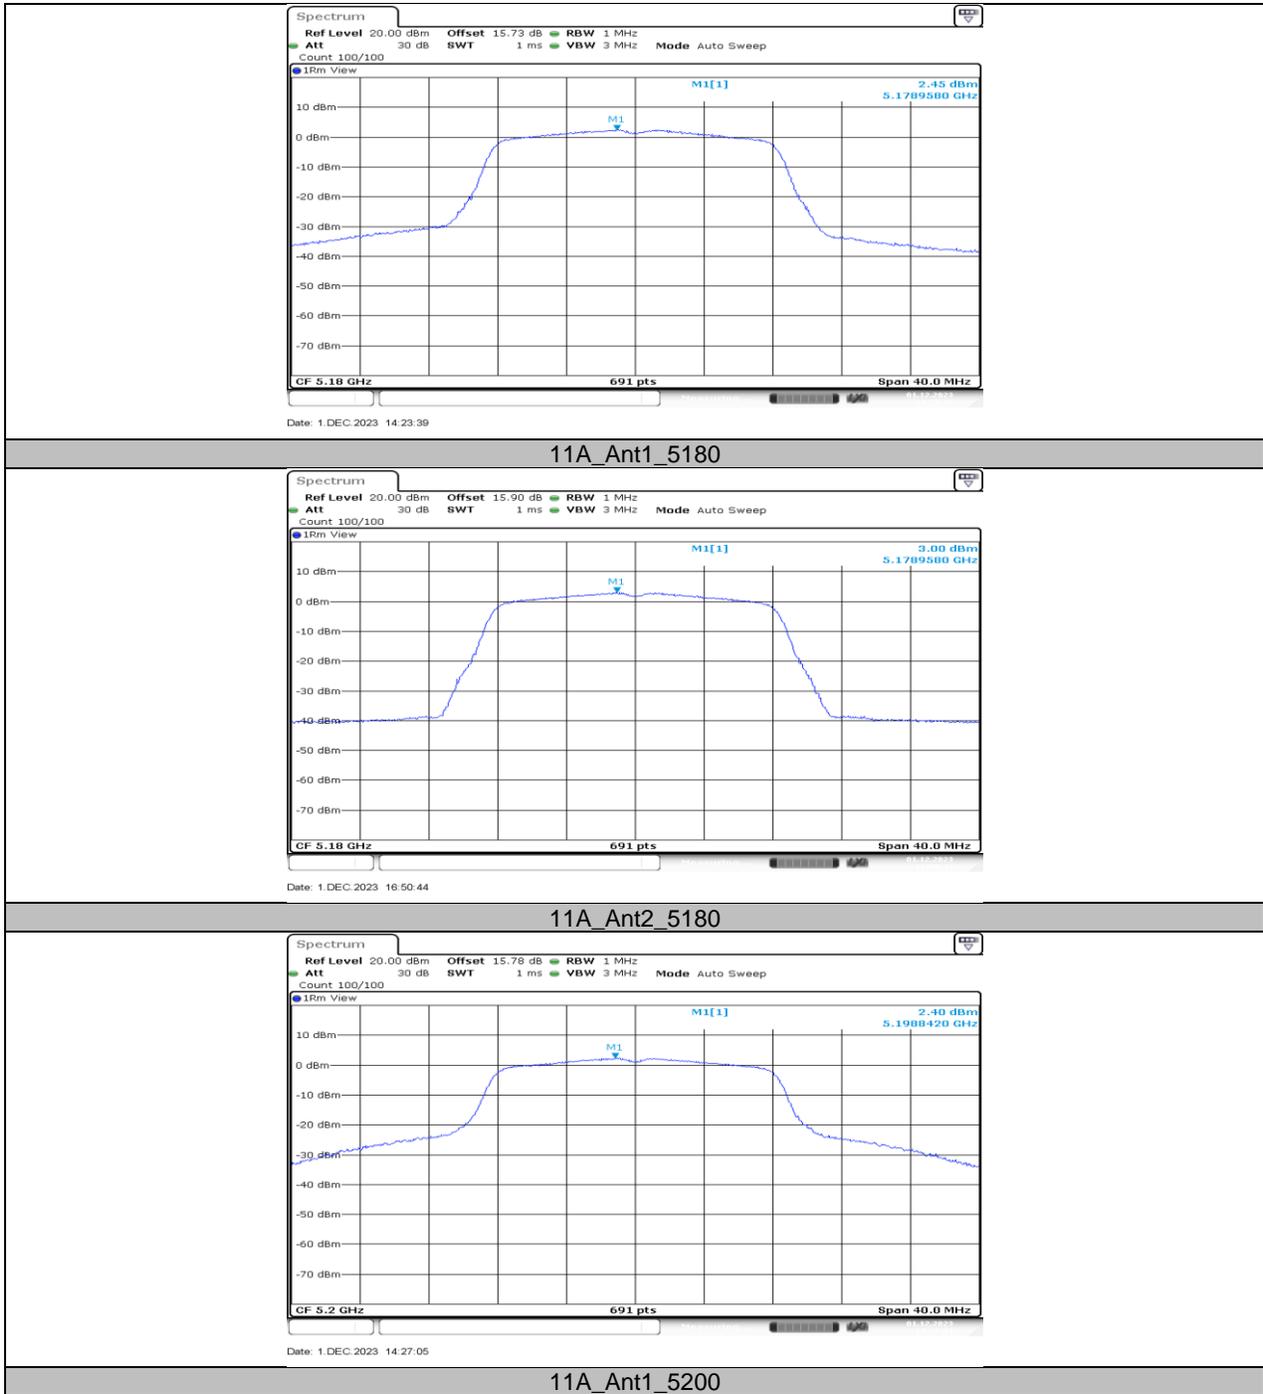


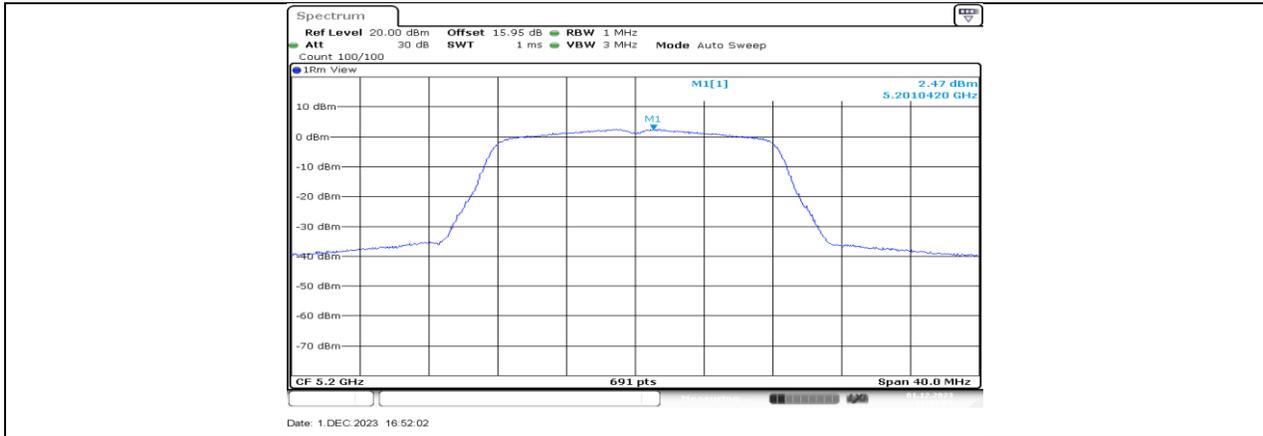


11A_Ant2_5200

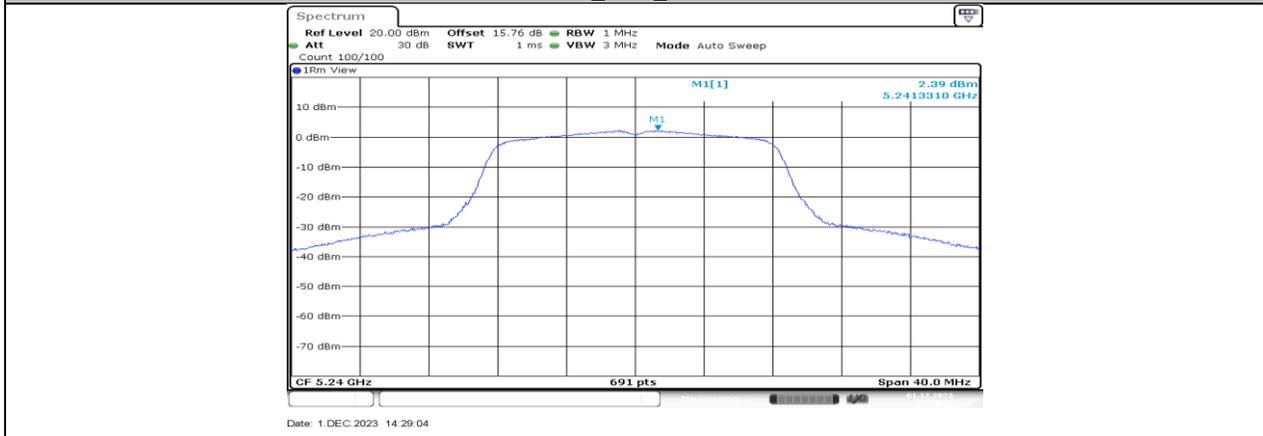


11A_Ant1_5240

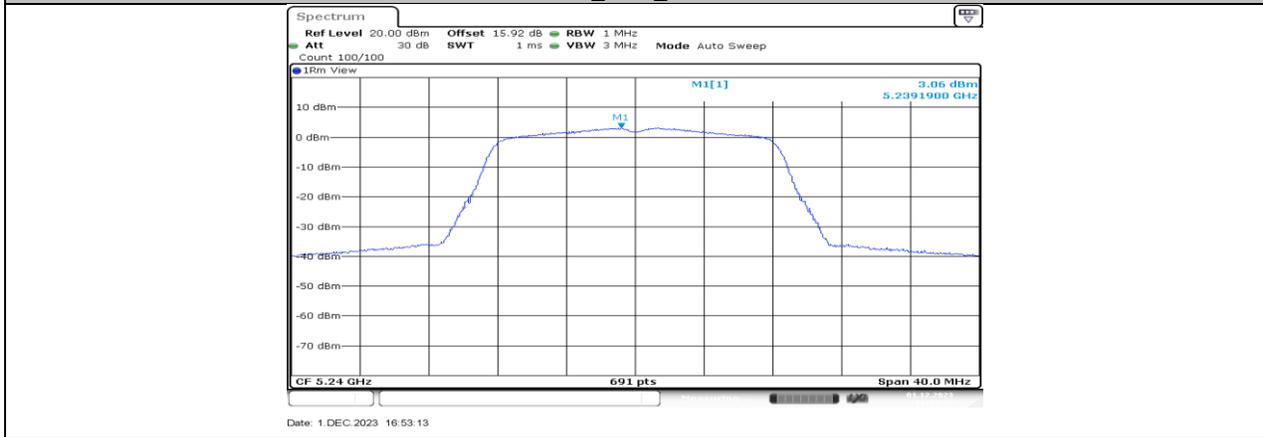

11A_Ant2_5240

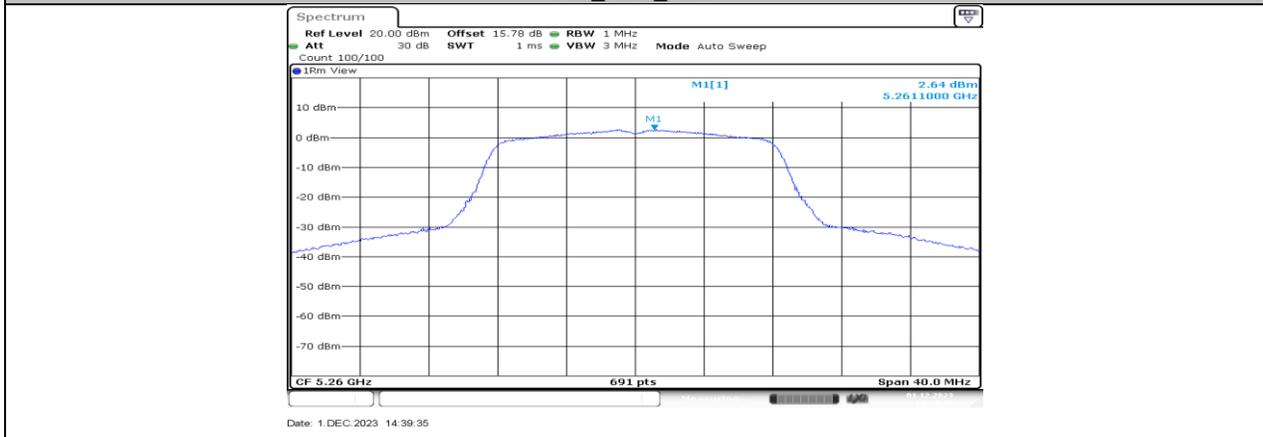

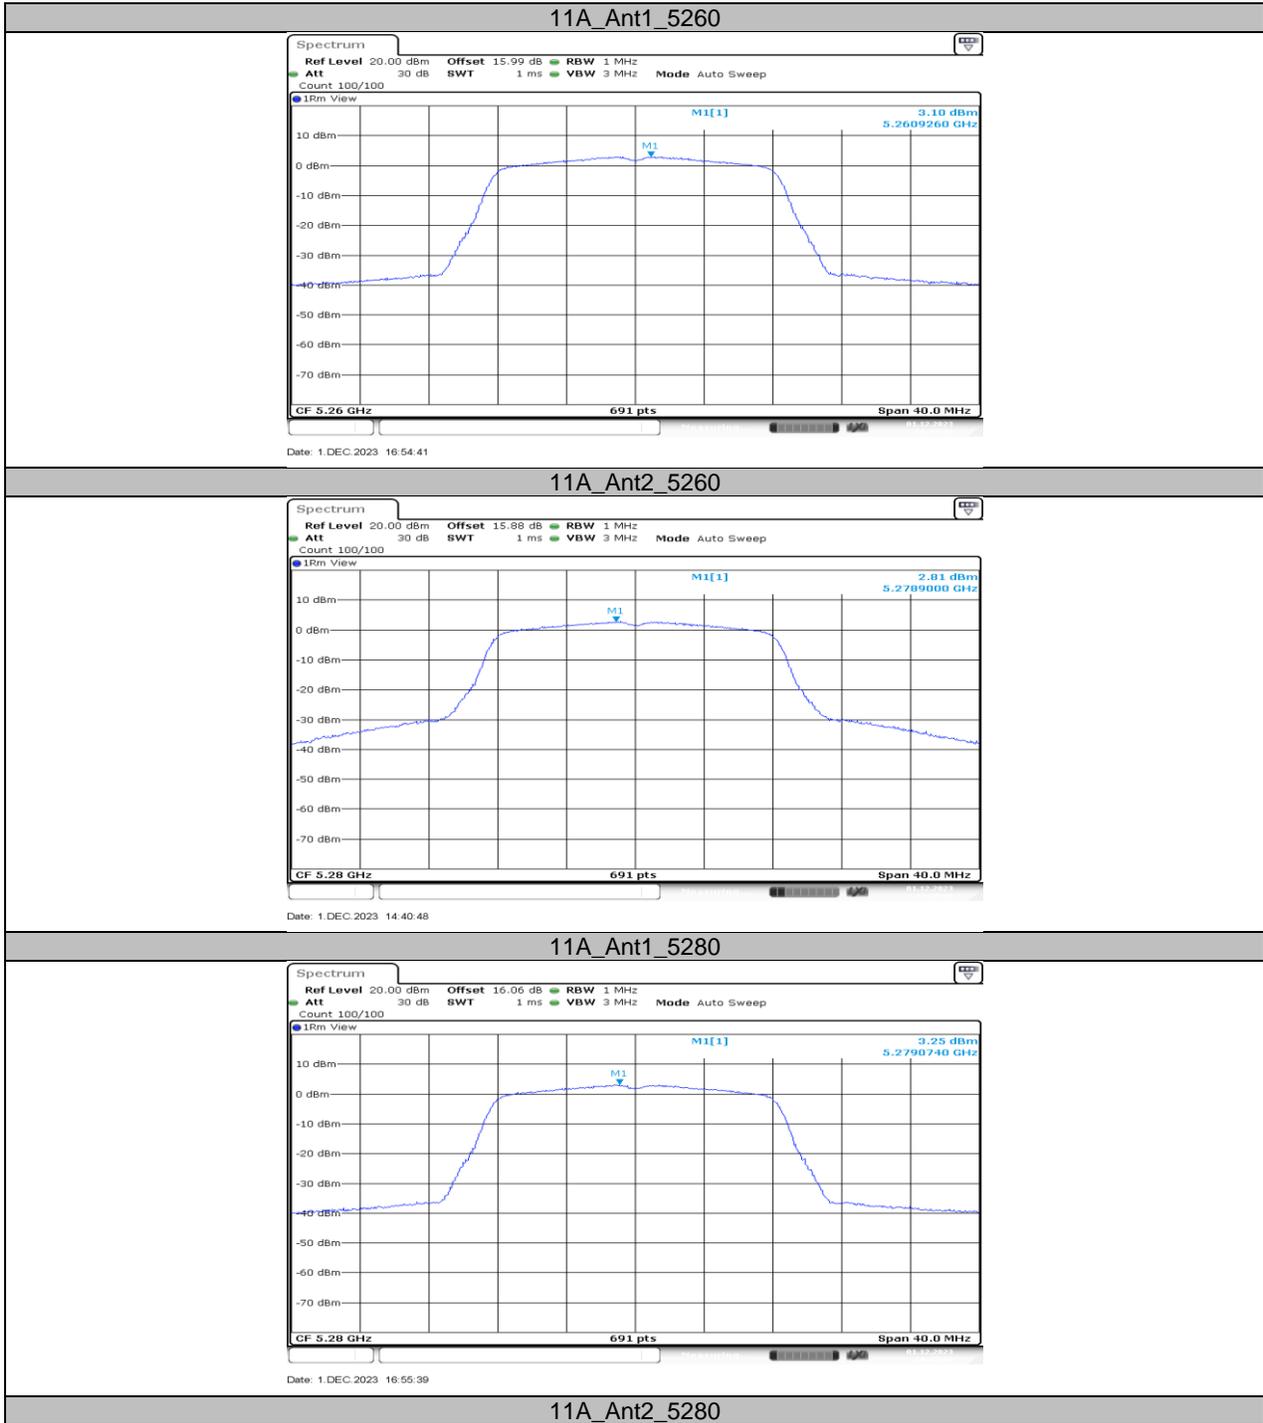





11A_Ant1_5320





11A_Ant2_5320

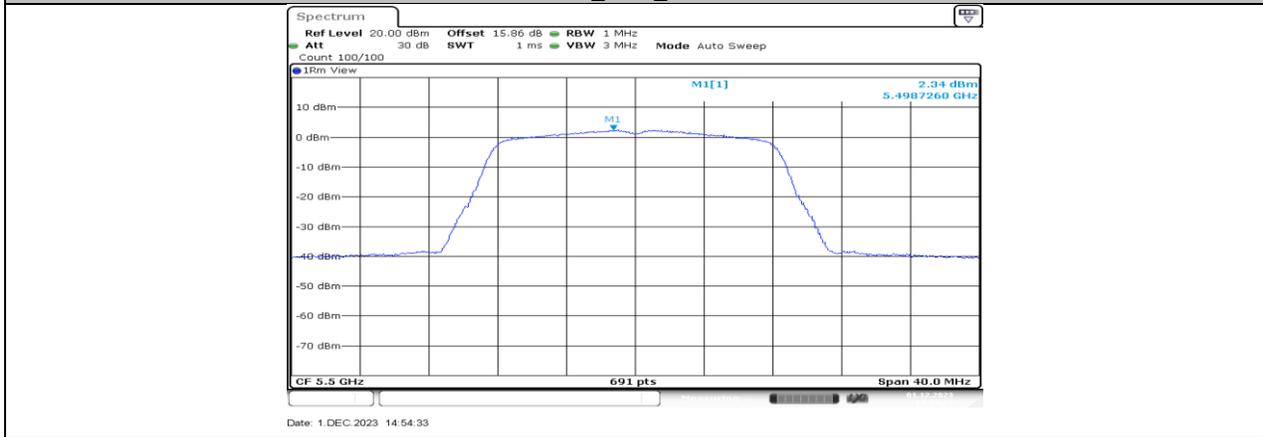


11A_Ant1_5500

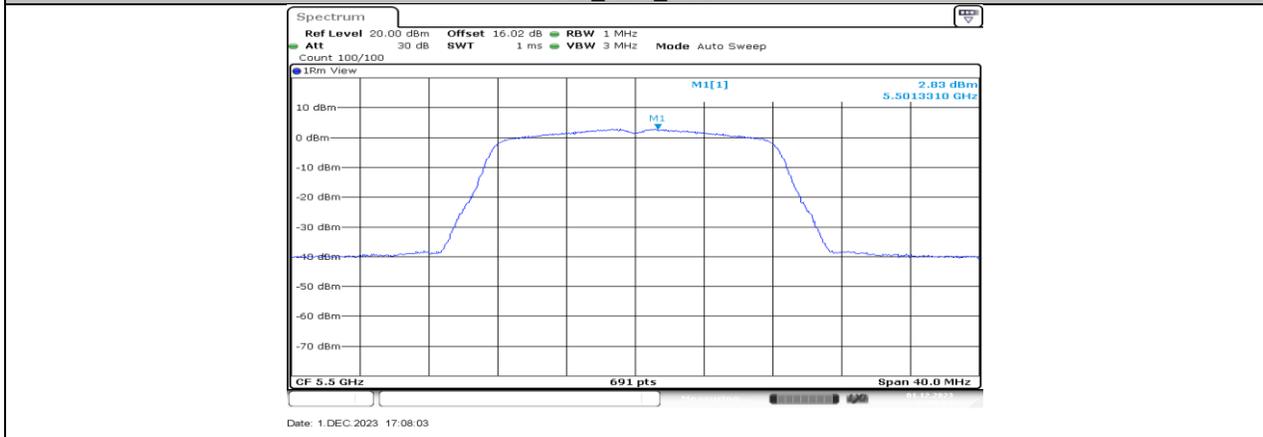

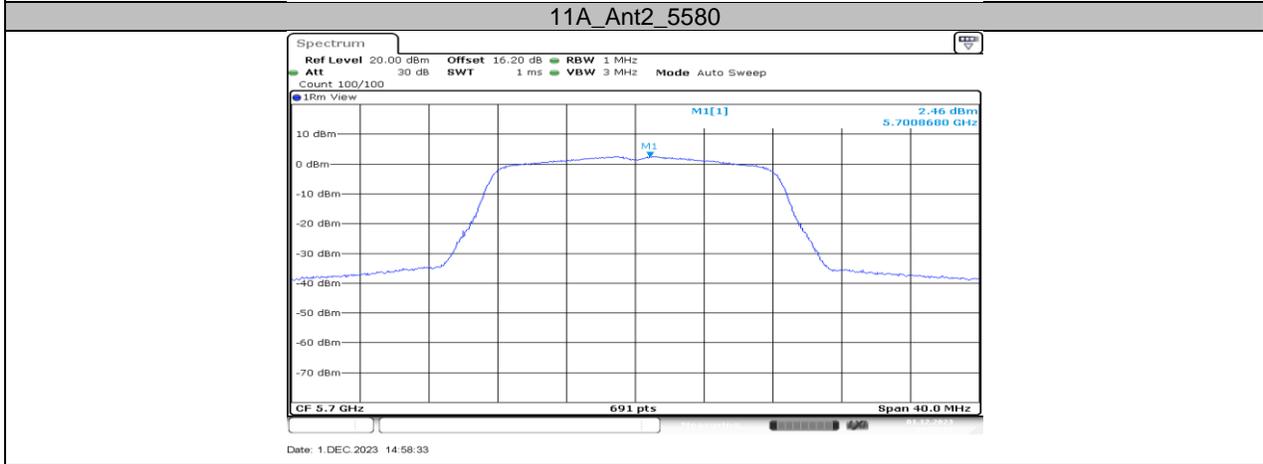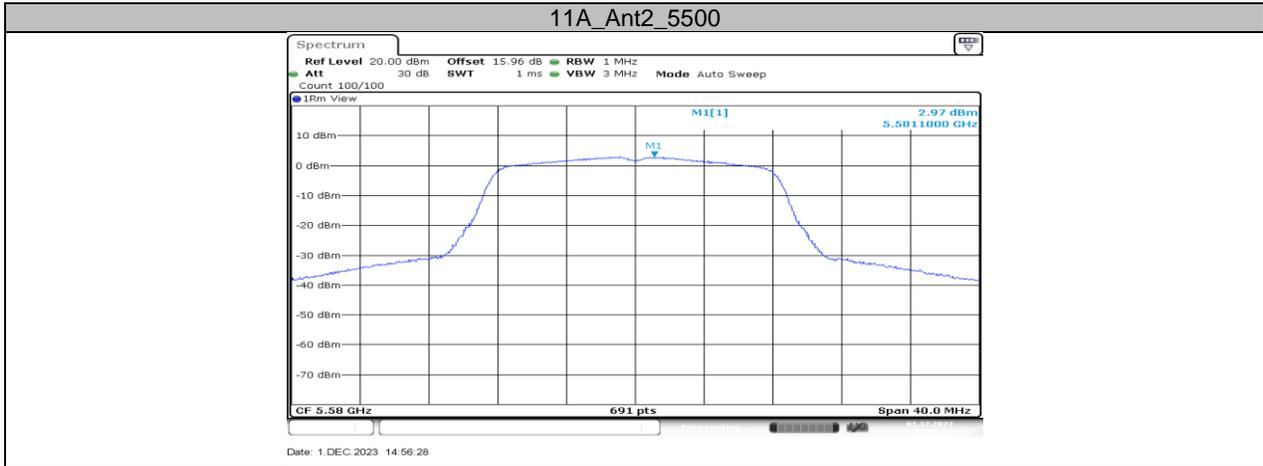


11A_Ant1_5700

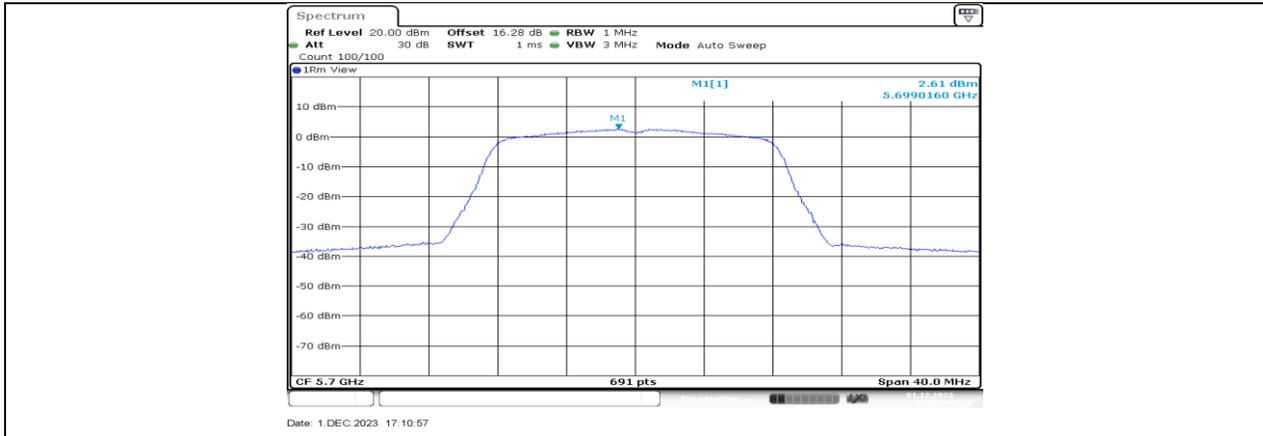

11A_Ant2_5700




11A_Ant1_5720_UNII-2C

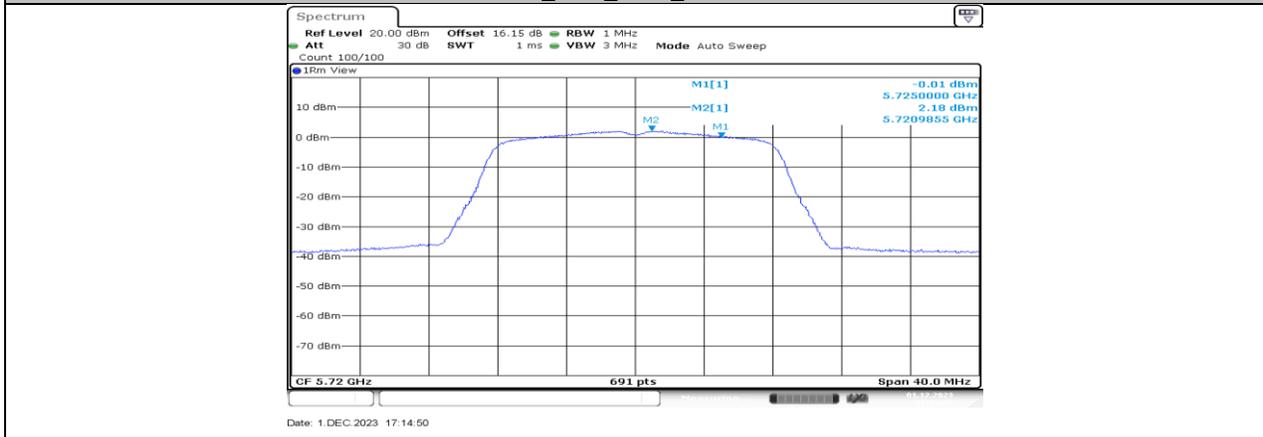

11A_Ant2_5720_UNII-2C



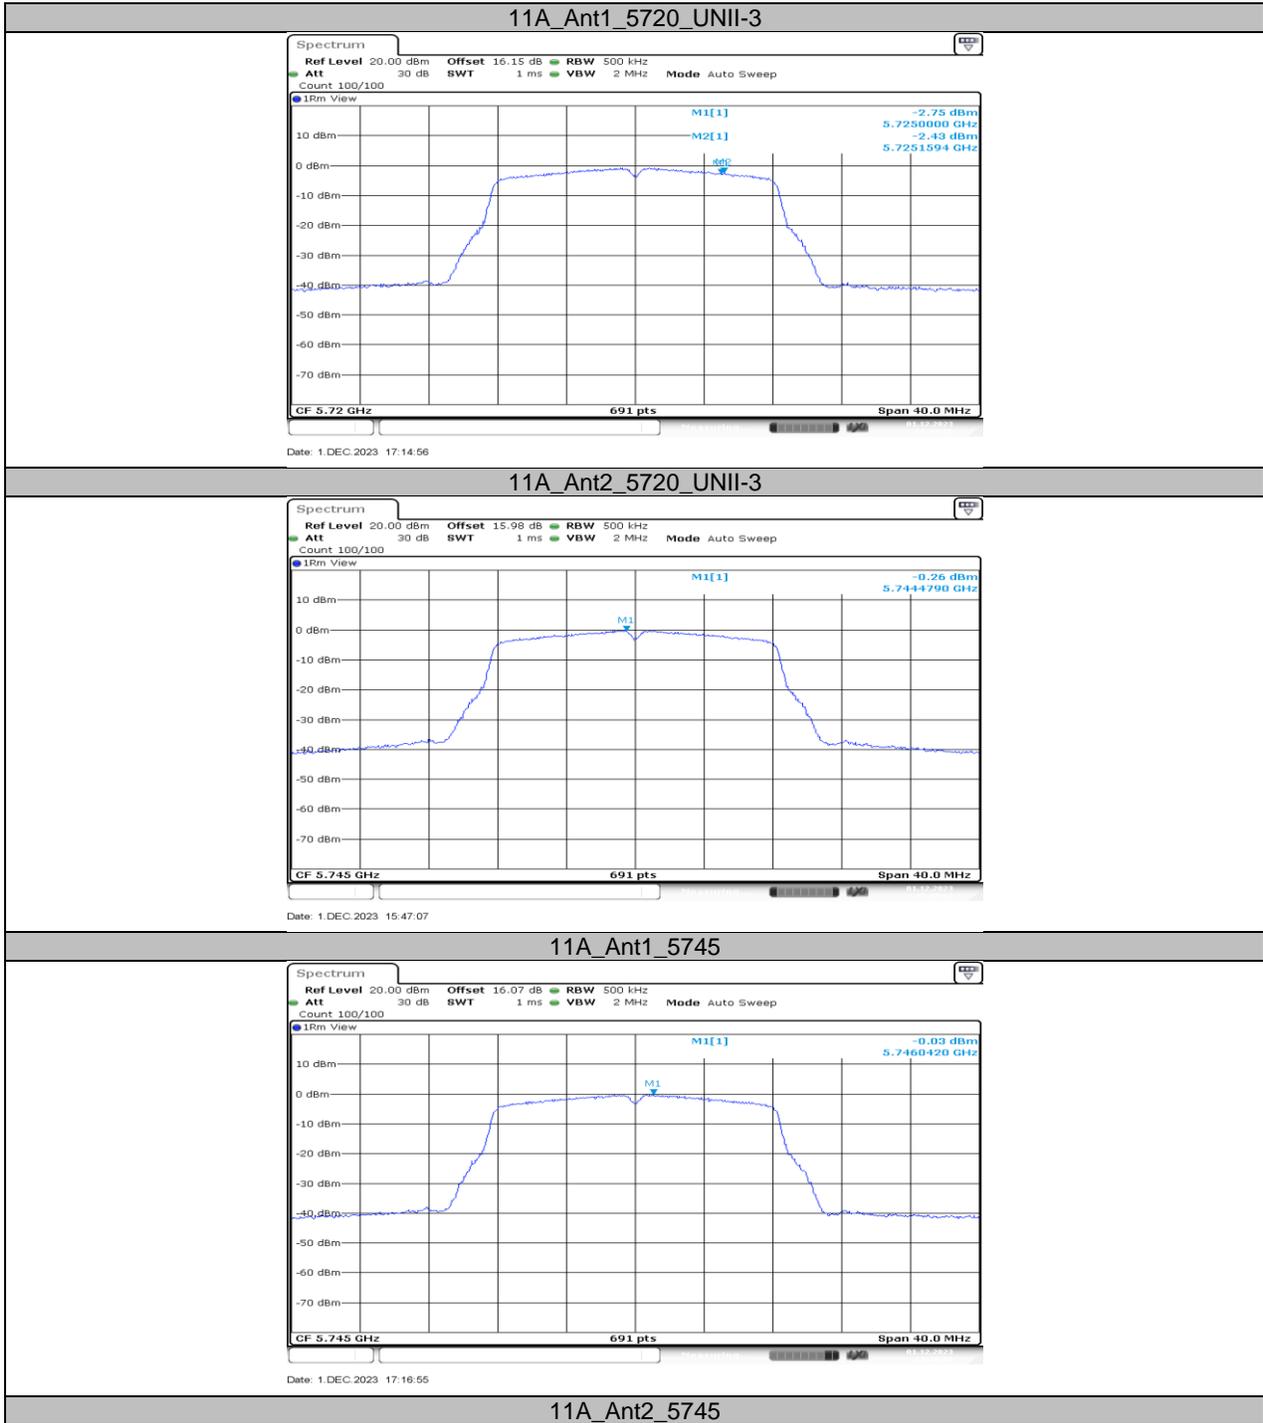



11A_Ant1_5785




11A_Ant2_5785



11A_Ant1_5825



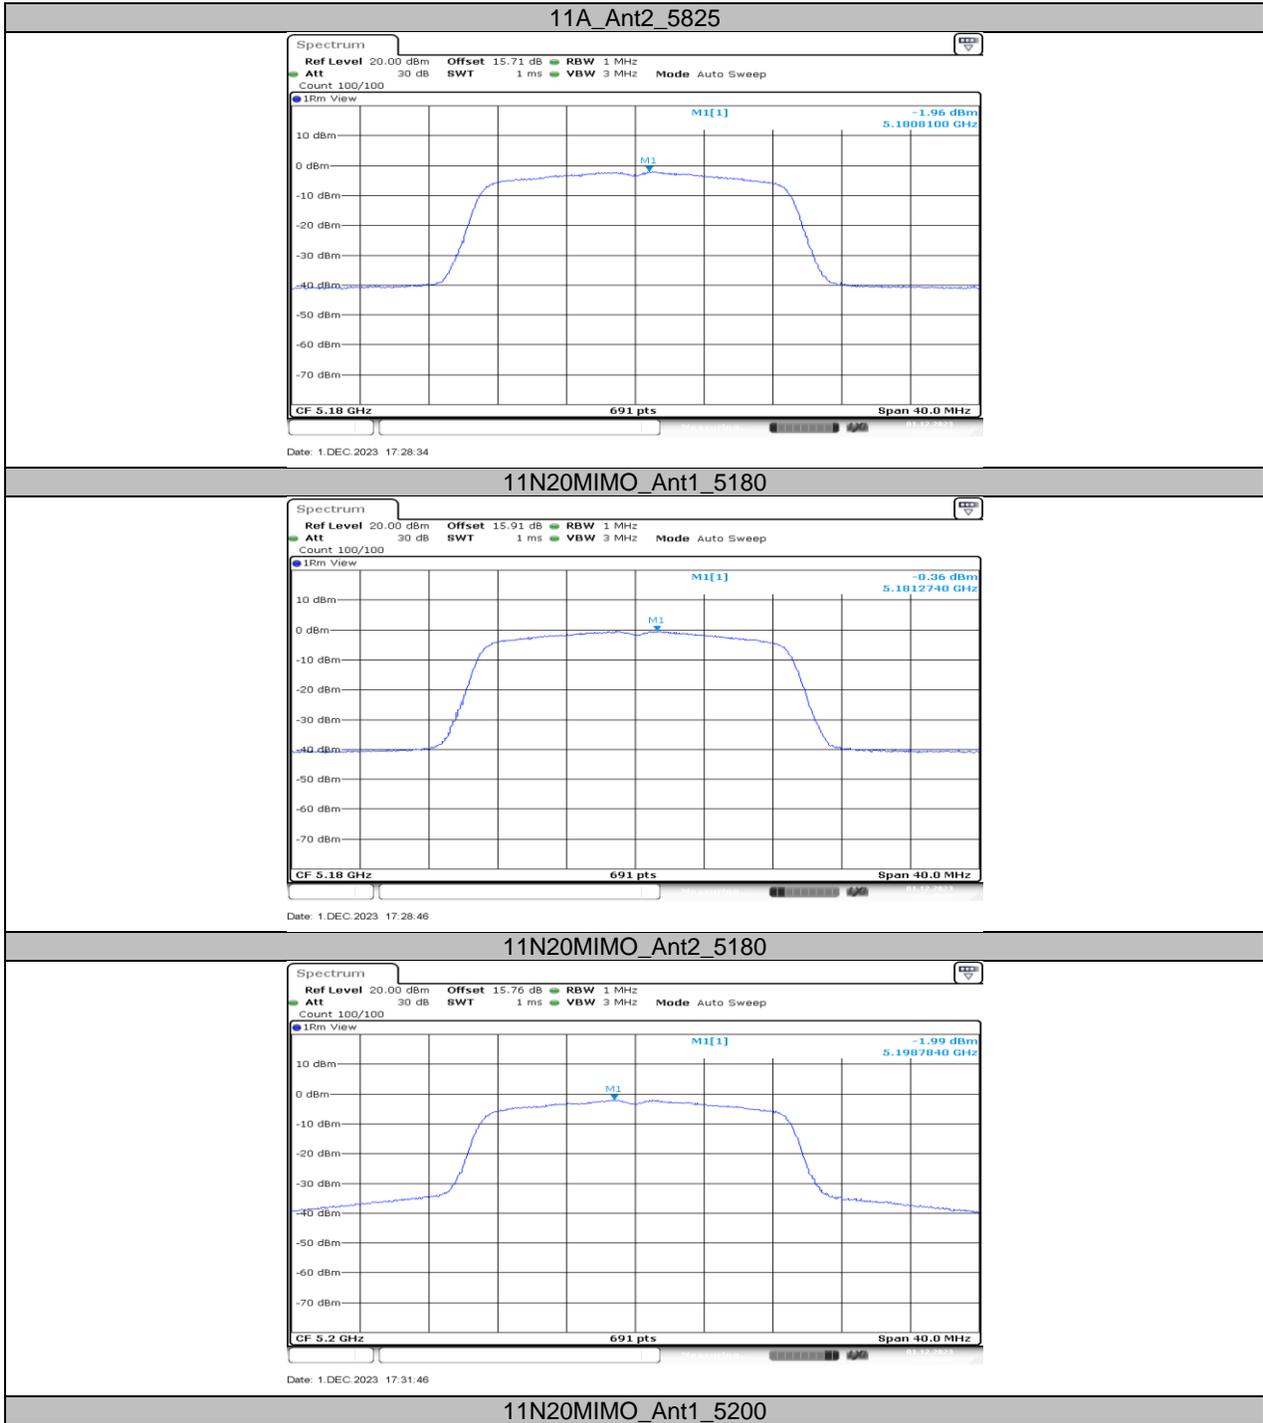




11N20MIMO_Ant2_5200




11N20MIMO_Ant1_5240







11N20MIMO_Ant2_5240

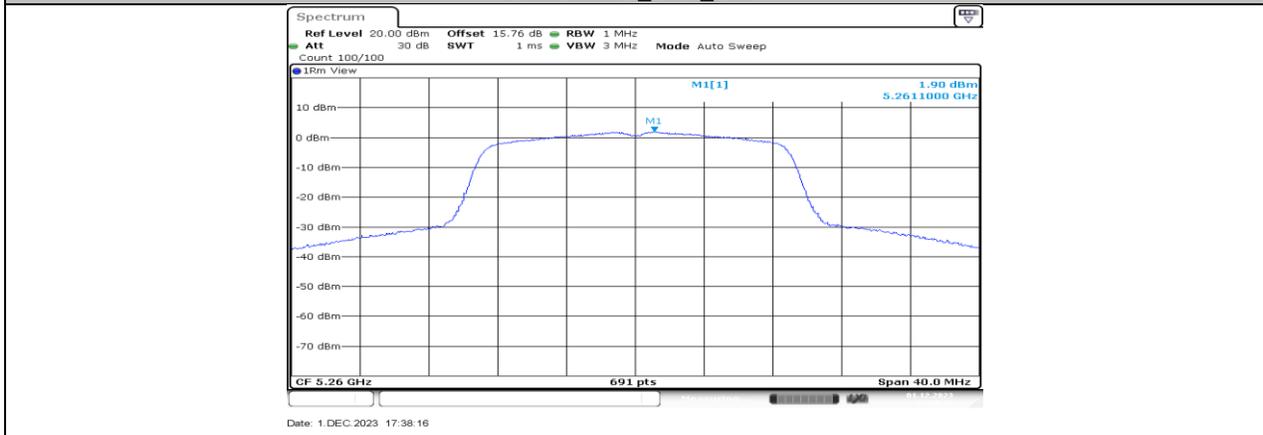

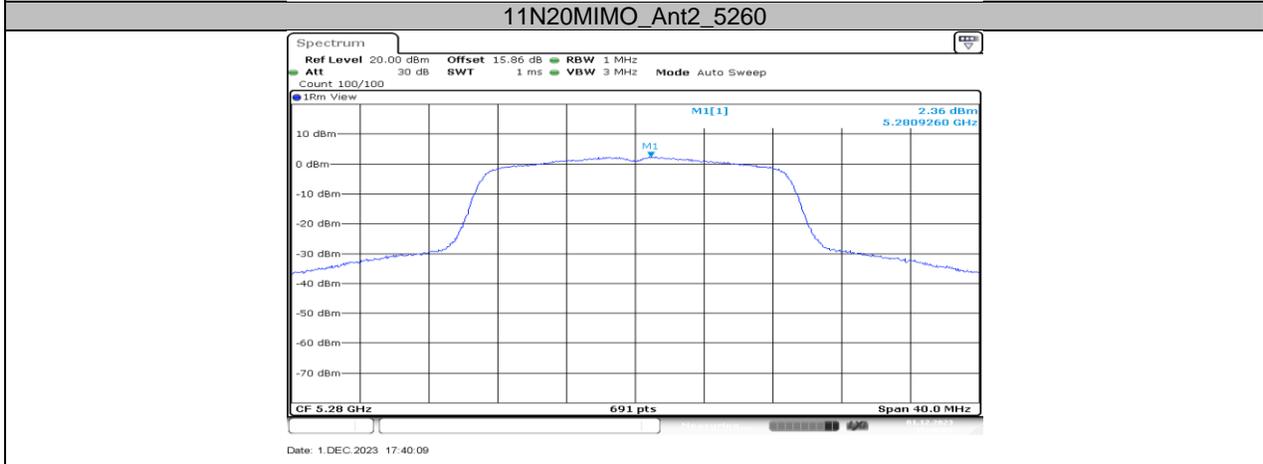


11N20MIMO_Ant2_5280

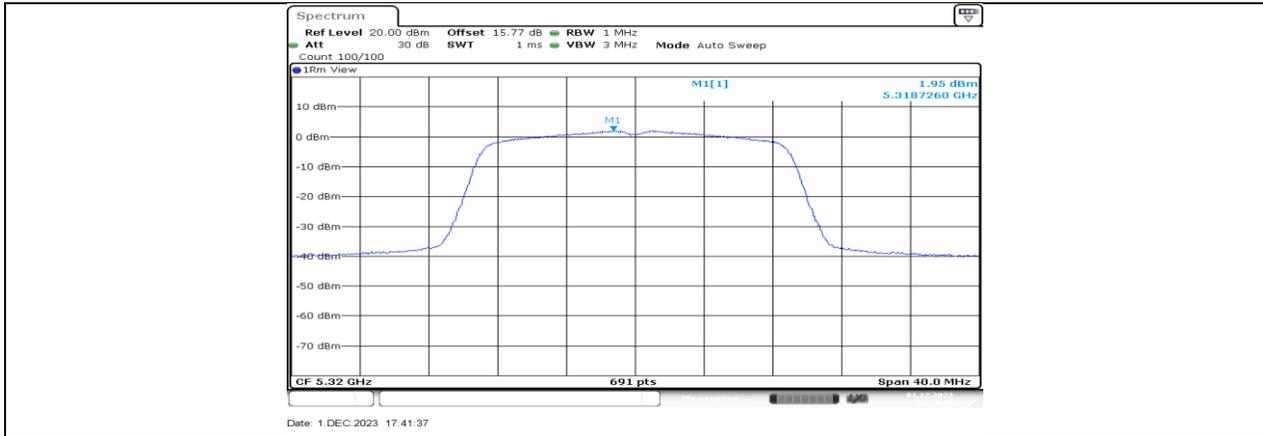


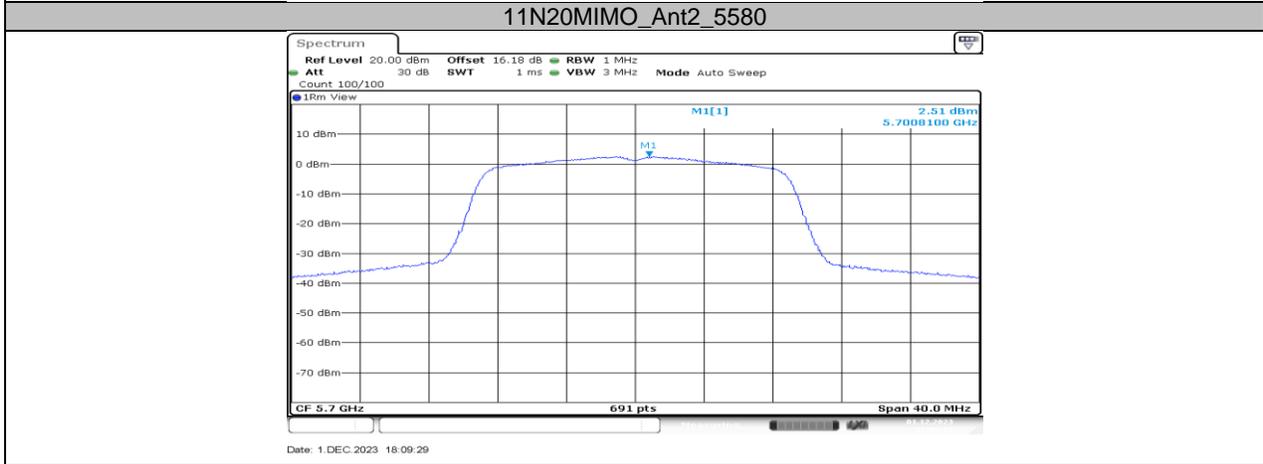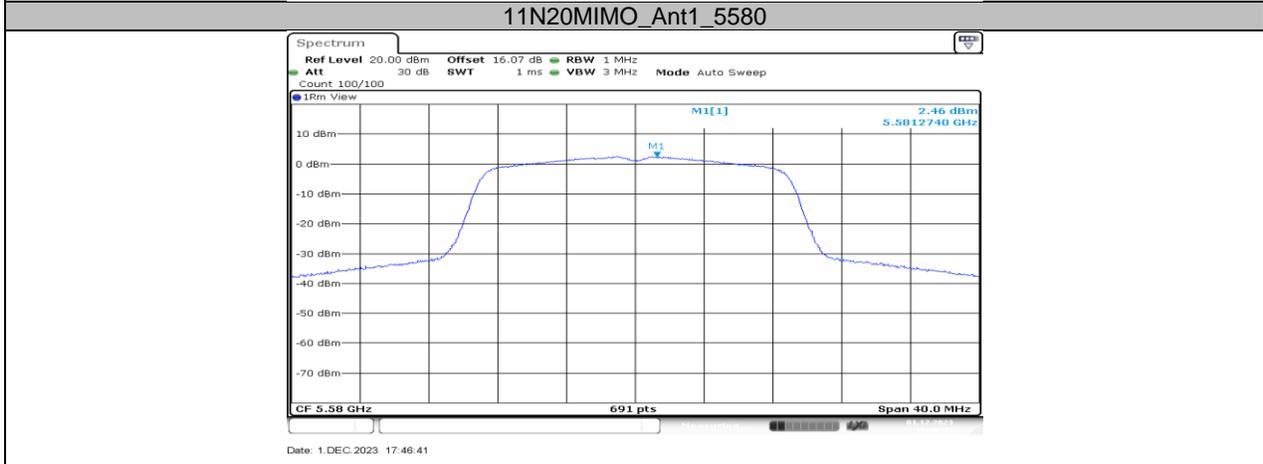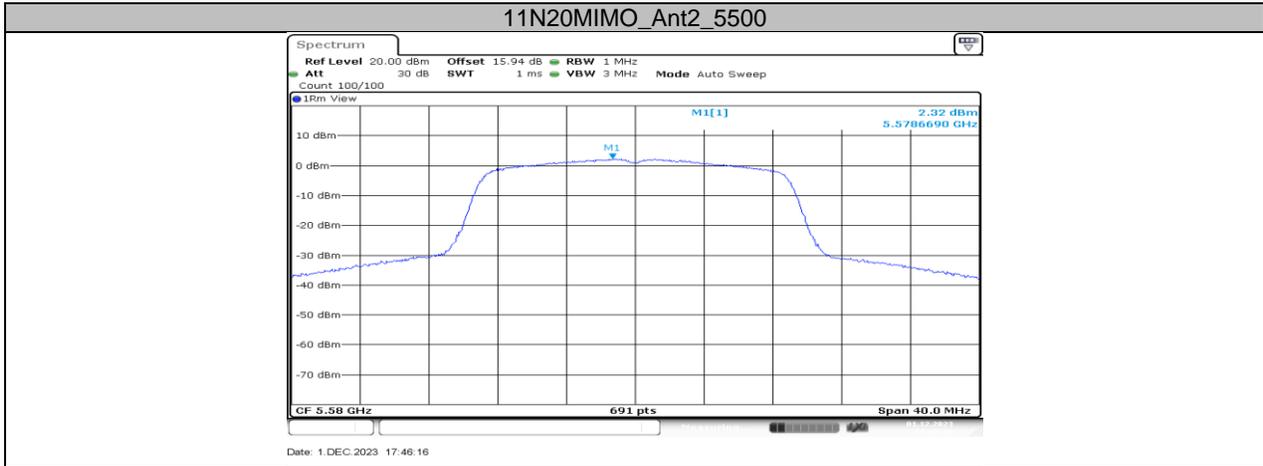


11N20MIMO_Ant1_5700

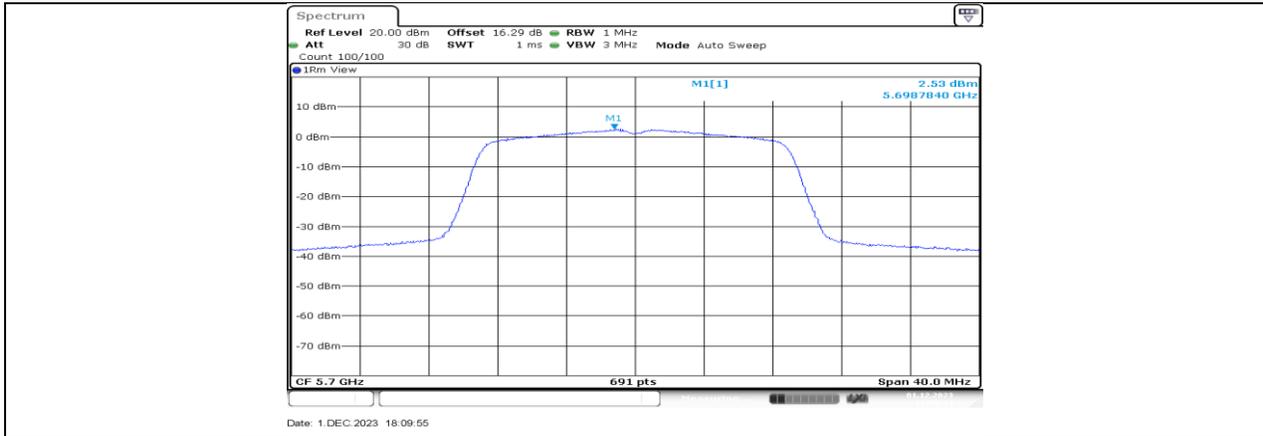

11N20MIMO_Ant2_5700

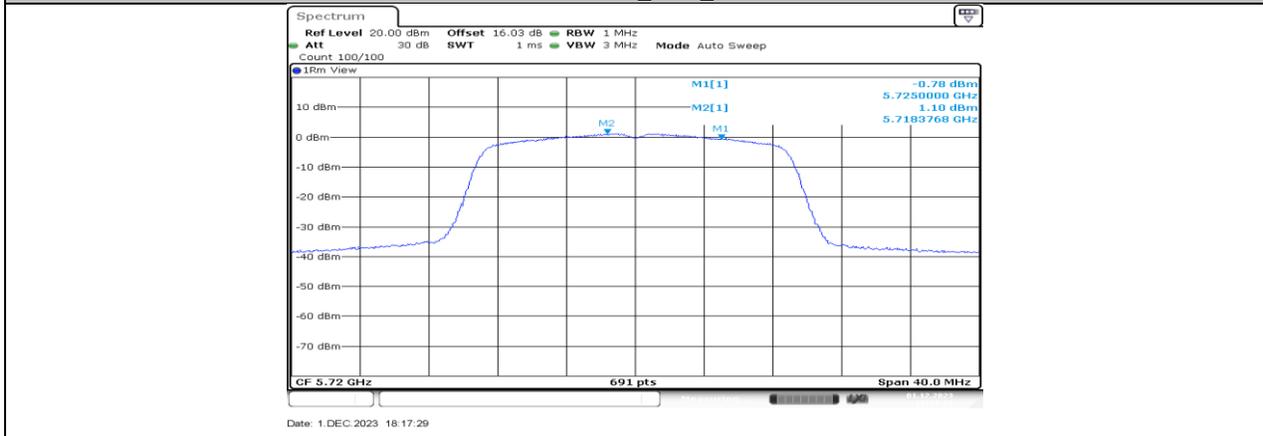

11N20MIMO_Ant1_5720_UNII-2C

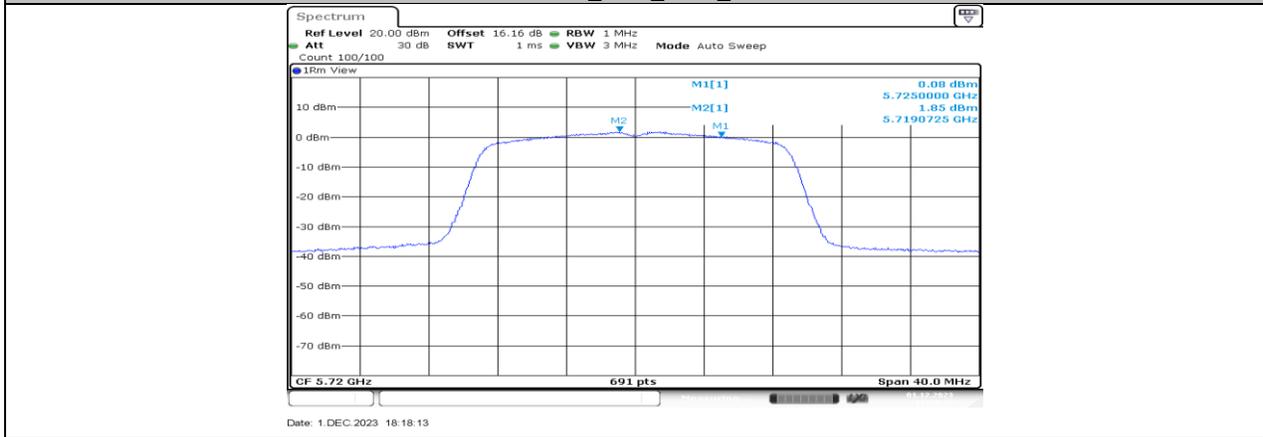


11N20MIMO_Ant2_5720_UNII-2C





11N20MIMO_Ant2_5745

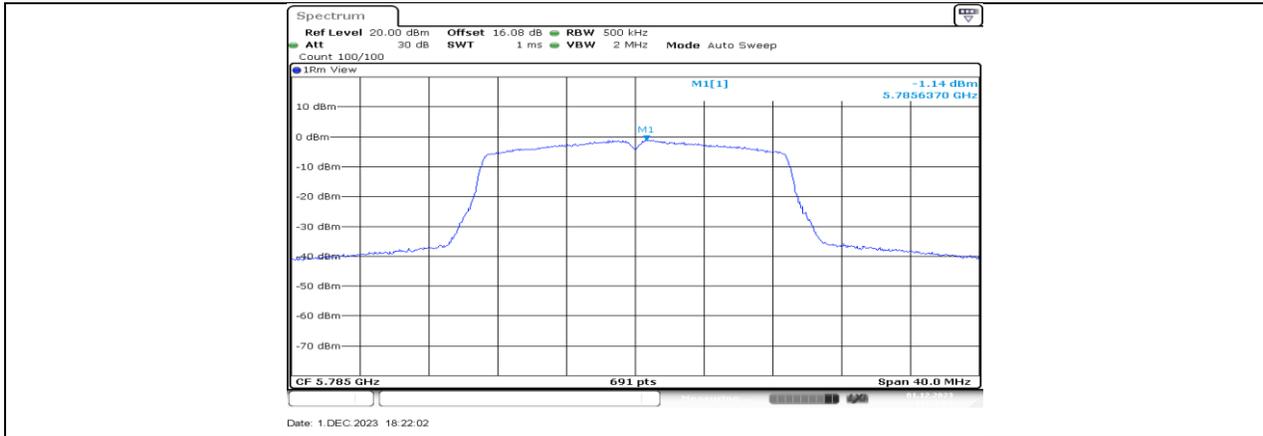

11N20MIMO_Ant1_5785



11N20MIMO_Ant2_5785



11N20MIMO_Ant1_5825





11N40MIMO_Ant1_5230



11N40MIMO_Ant2_5230




11N40MIMO_Ant1_5270




11N40MIMO_Ant2_5270



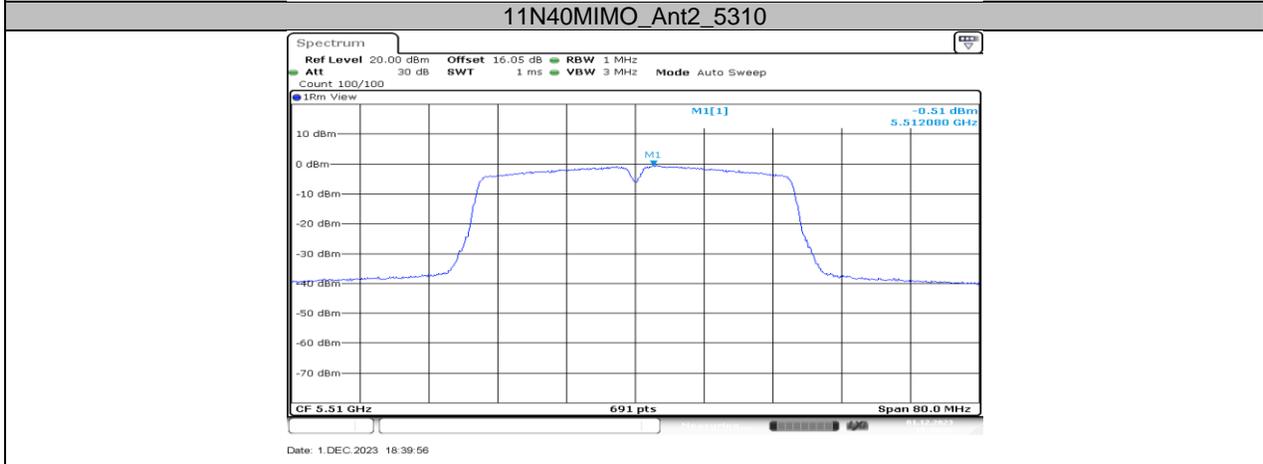

11N40MIMO_Ant2_5510

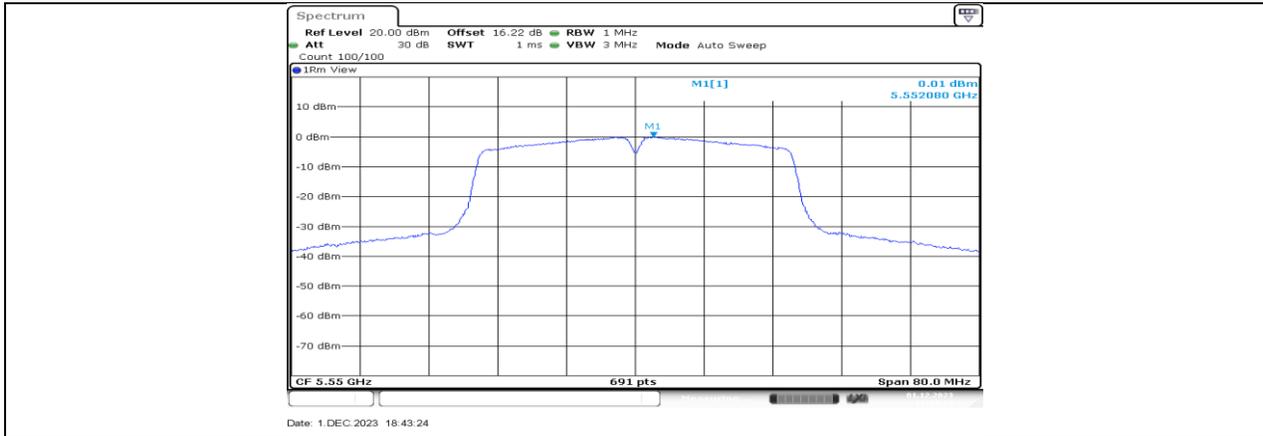

11N40MIMO_Ant1_5550




11N40MIMO_Ant2_5550



11N40MIMO_Ant1_5670



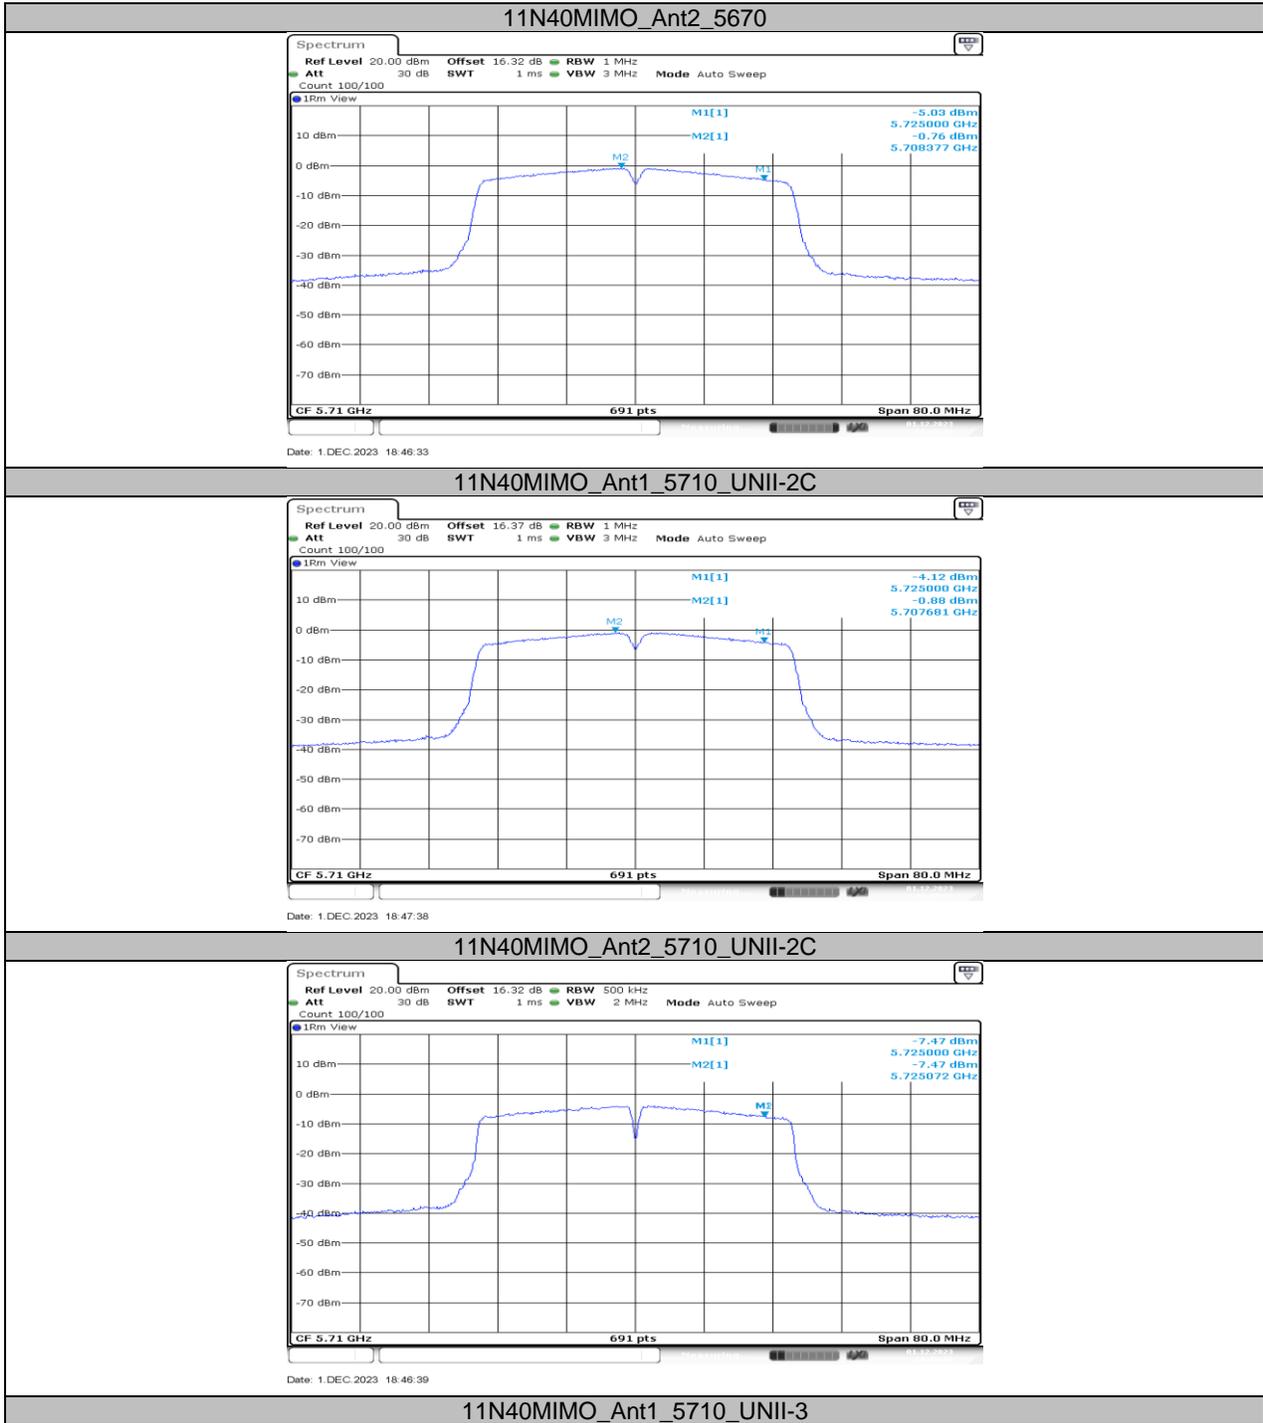




11N40MIMO_Ant2_5710_UNII-3





11N40MIMO_Ant1_5755




11N40MIMO_Ant2_5755

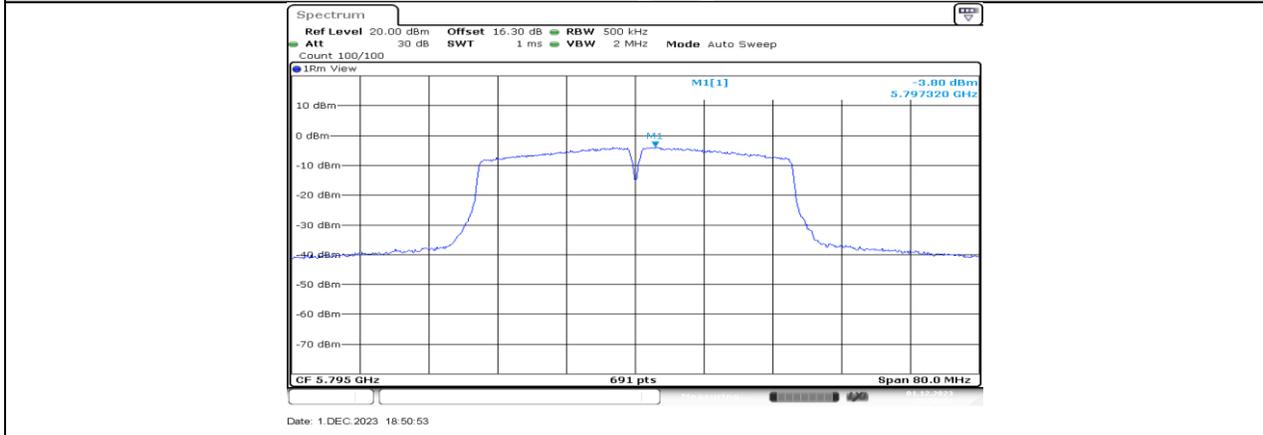

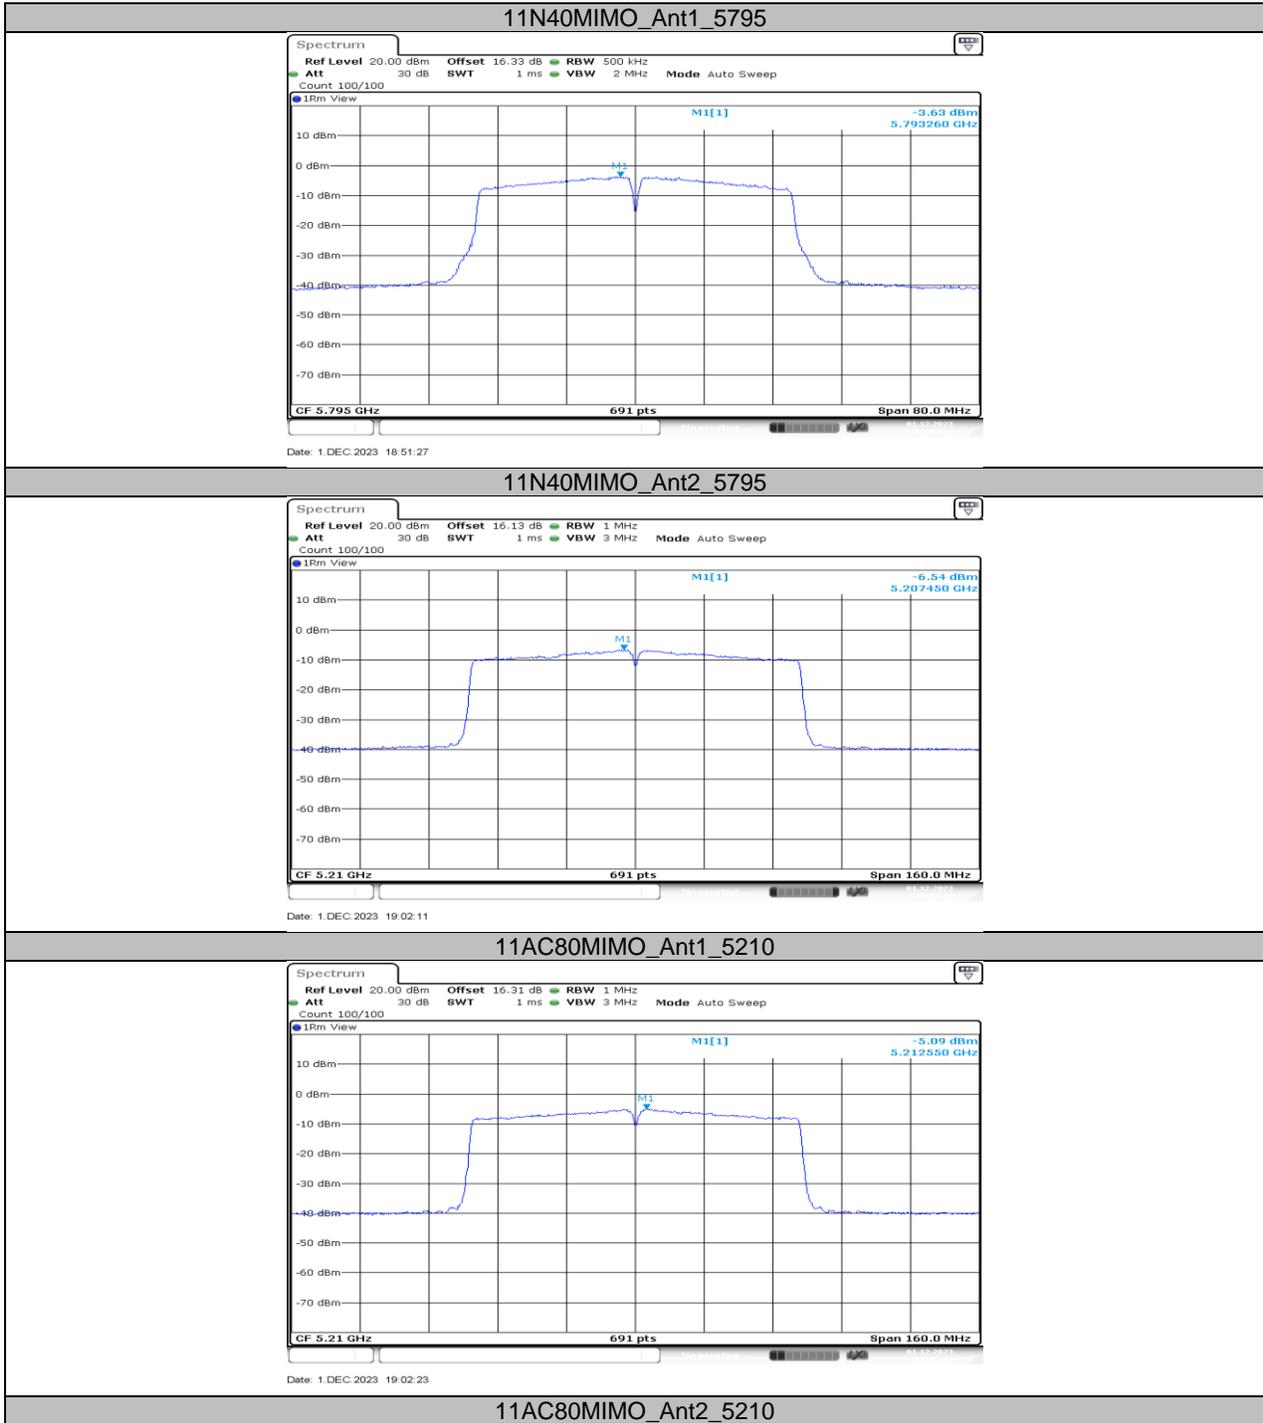


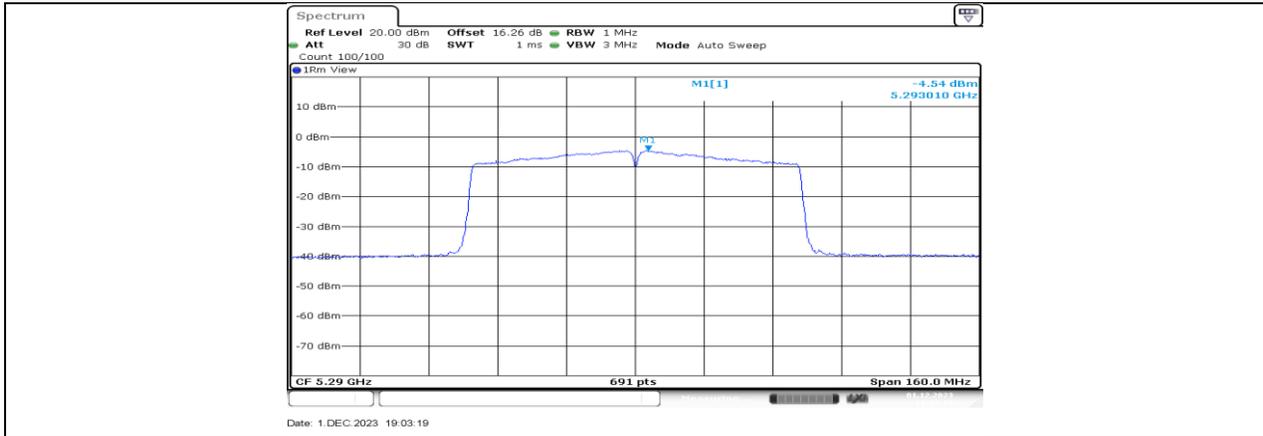


11AC80MIMO_Ant1_5290

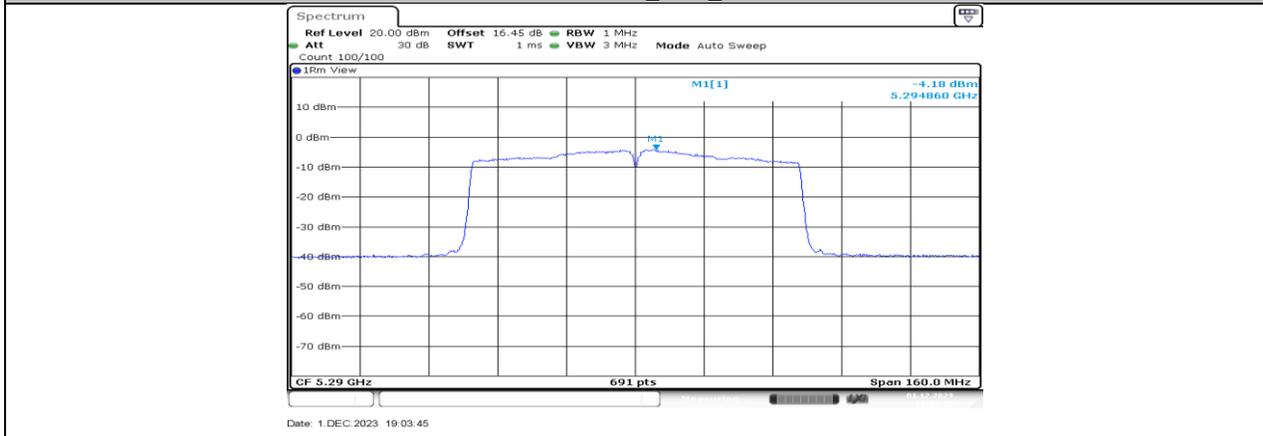


11AC80MIMO_Ant2_5290

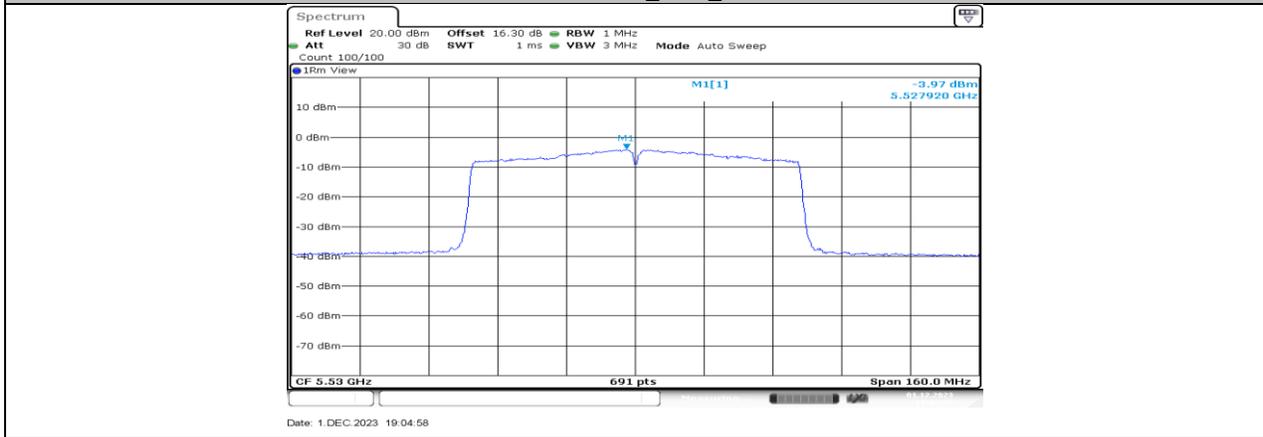


11AC80MIMO_Ant1_5530

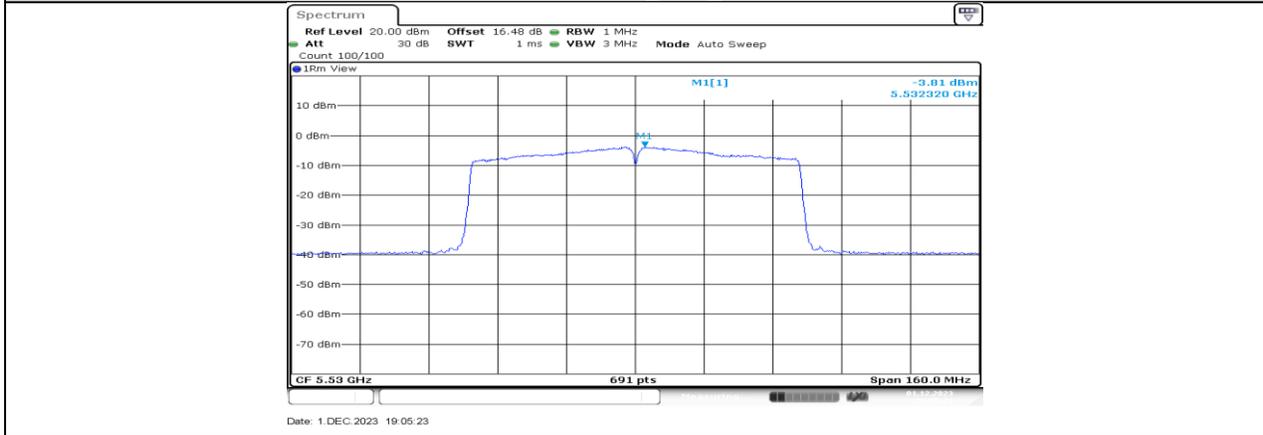


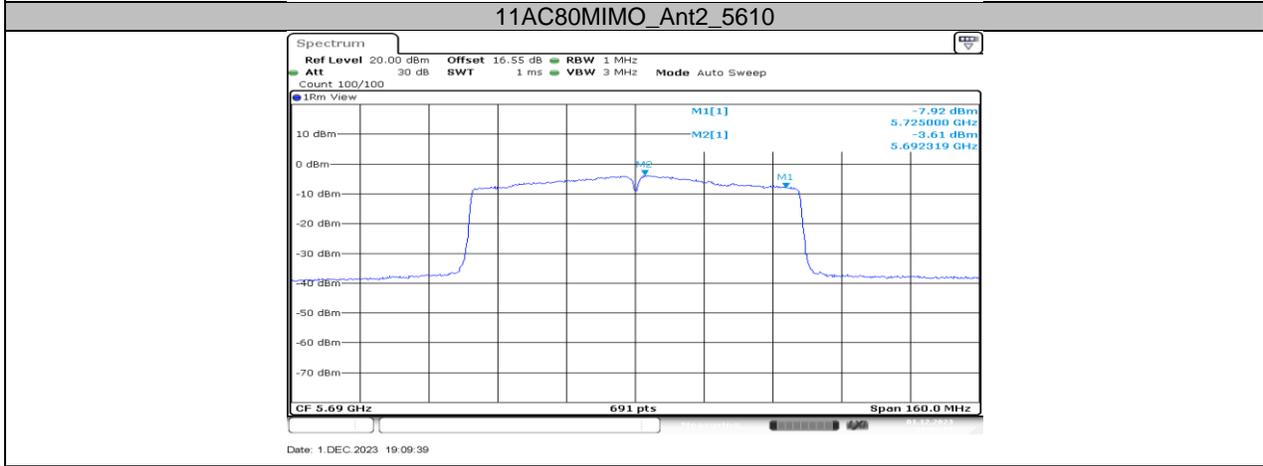


11AC80MIMO_Ant1_5690_UNII-2C

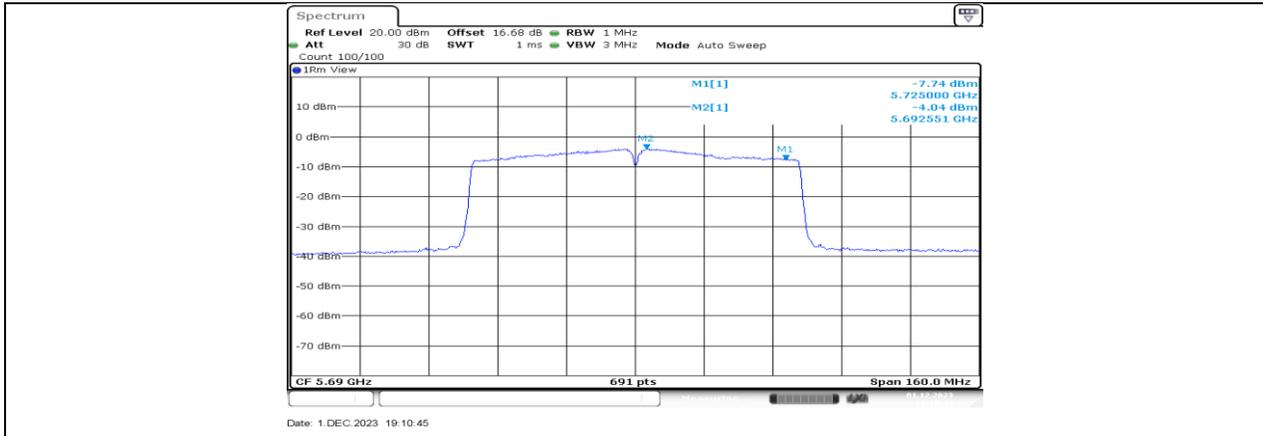

11AC80MIMO_Ant2_5690_UNII-2C

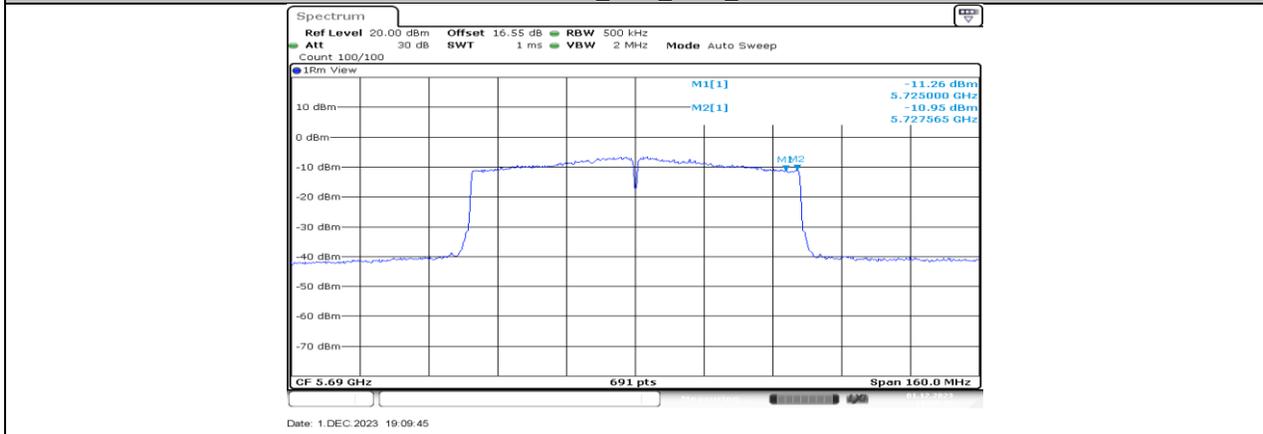

11AC80MIMO_Ant1_5690_UNII-3

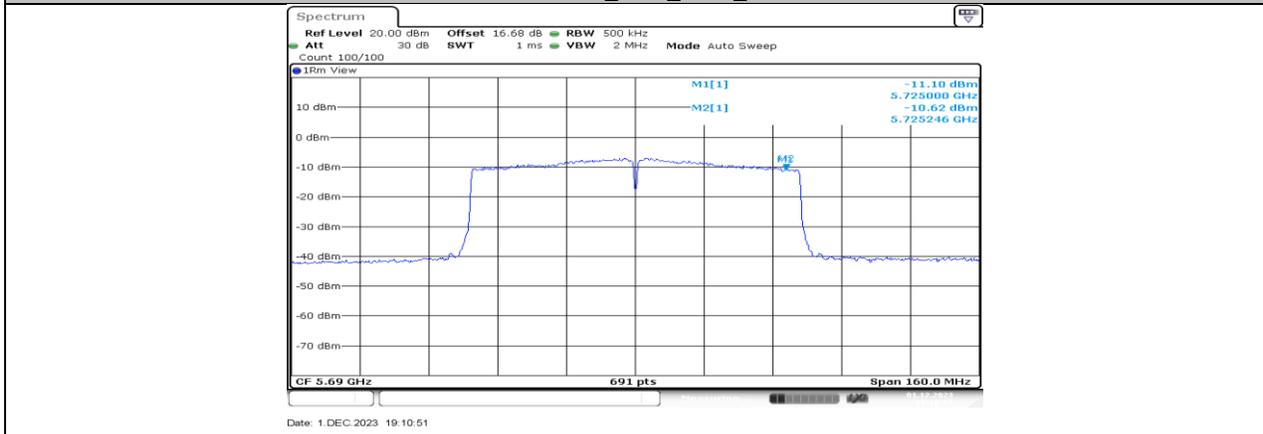

11AC80MIMO_Ant2_5690_UNII-3





11.6. APPENDIX F: FREQUENCY STABILITY

11.6.1. Test Result

Frequency Error vs. Voltage									
802.11a:5180MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)						
TN	VL	5180.0011	0.21	5180.0130	2.50	5180.0066	1.27	5179.9927	-1.41
TN	VN	5179.9961	-0.75	5179.9979	-0.40	5179.9837	-3.15	5179.9824	-3.40
TN	VH	5179.9810	-3.66	5179.9840	-3.08	5180.0128	2.48	5180.0022	0.42
Frequency Error vs. Temperature									
802.11a:5180MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)						
70	VN	5179.9828	-3.33	5180.0135	2.62	5179.9986	-0.27	5180.0013	0.25
60	VN	5179.9764	-4.56	5179.9951	-0.94	5180.0245	4.74	5179.9823	-3.42
50	VN	5179.9915	-1.63	5180.0235	4.53	5179.9895	-2.02	5180.0192	3.70
40	VN	5180.0028	0.54	5180.0047	0.90	5179.9963	-0.72	5179.9797	-3.93
30	VN	5179.9837	-3.14	5180.0206	3.98	5179.9820	-3.47	5180.0130	2.52
20	VN	5180.0122	2.35	5180.0126	2.42	5179.9908	-1.77	5179.9754	-4.75
10	VN	5179.9882	-2.27	5179.9992	-0.16	5180.0182	3.52	5180.0223	4.30
0	VN	5180.0066	1.27	5180.0074	1.43	5179.9795	-3.96	5179.9862	-2.67

Note:

1. All antennas, test modes and test channels have been tested, only the worst data record in the report.
2. For the detail Test Conditions, please refer to section 7.5 TEST ENVIRONMENT.

Frequency Error vs. Voltage									
802.11a:5825MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)						
TN	VL	5825.0086	1.47	5824.9950	-0.86	5824.9807	-3.31	5825.0023	0.40
TN	VN	5824.9766	-4.02	5825.0030	0.51	5824.9914	-1.48	5825.0044	0.75
TN	VH	5824.9910	-1.54	5824.9866	-2.30	5824.9794	-3.54	5824.9972	-0.47

Frequency Error vs. Temperature									
802.11a:5825MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)						
70	VN	5824.9786	-3.68	5825.0029	0.49	5824.9873	-2.17	5824.9847	-2.62
60	VN	5825.0166	2.84	5824.9915	-1.45	5825.0217	3.72	5824.9962	-0.65
50	VN	5824.9769	-3.96	5824.9984	-0.28	5825.0184	3.16	5824.9770	-3.95
40	VN	5825.0208	3.57	5825.0183	3.14	5825.0184	3.15	5824.9924	-1.30
30	VN	5825.0206	3.53	5824.9871	-2.22	5824.9899	-1.74	5825.0244	4.19
20	VN	5825.0037	0.63	5824.9977	-0.40	5824.9826	-2.98	5824.9778	-3.81
10	VN	5824.9892	-1.85	5824.9868	-2.27	5824.9911	-1.53	5825.0147	2.53
0	VN	5824.9953	-0.81	5824.9965	-0.59	5825.0129	2.22	5825.0021	0.35

Note:

1. All antennas, test modes and test channels have been tested, only the worst data record in the report.
2. For the detail Test Conditions, please refer to section 7.5 TEST ENVIRONMENT.

11.7. APPENDIX G: DUTY CYCLE

11.7.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11A	1.39	1.44	0.9653	96.53	0.15	0.72	1
11N20MIMO	1.3	1.34	0.9701	97.01	0.13	0.77	1
11N40MIMO	0.65	0.7	0.9286	92.86	0.32	1.54	2
11AC80MIMO	0.33	0.37	0.8919	89.19	0.50	3.03	4

Note:




Duty Cycle Correction Factor=10log (1/x).


Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.


11.7.2. Test Graphs

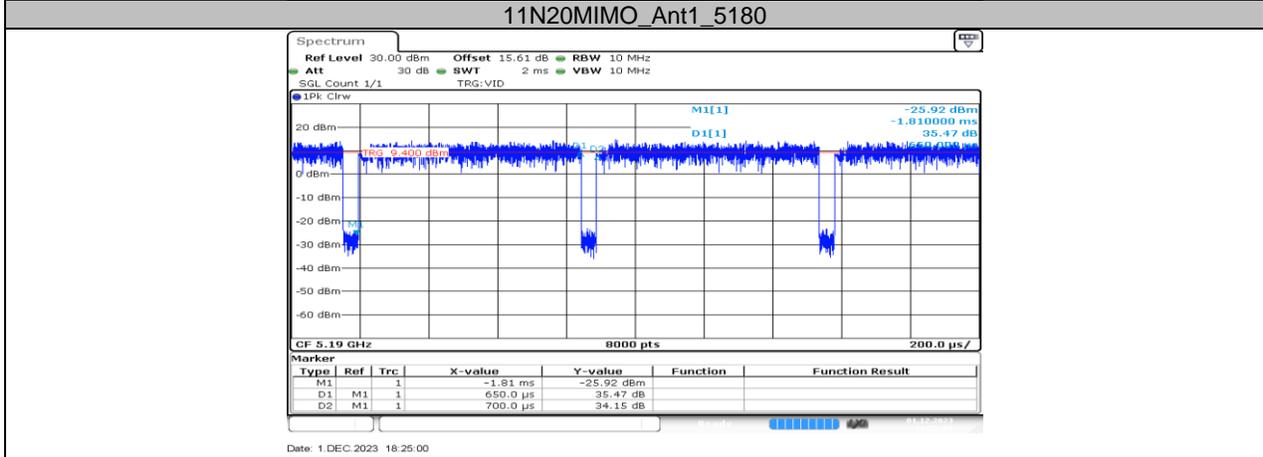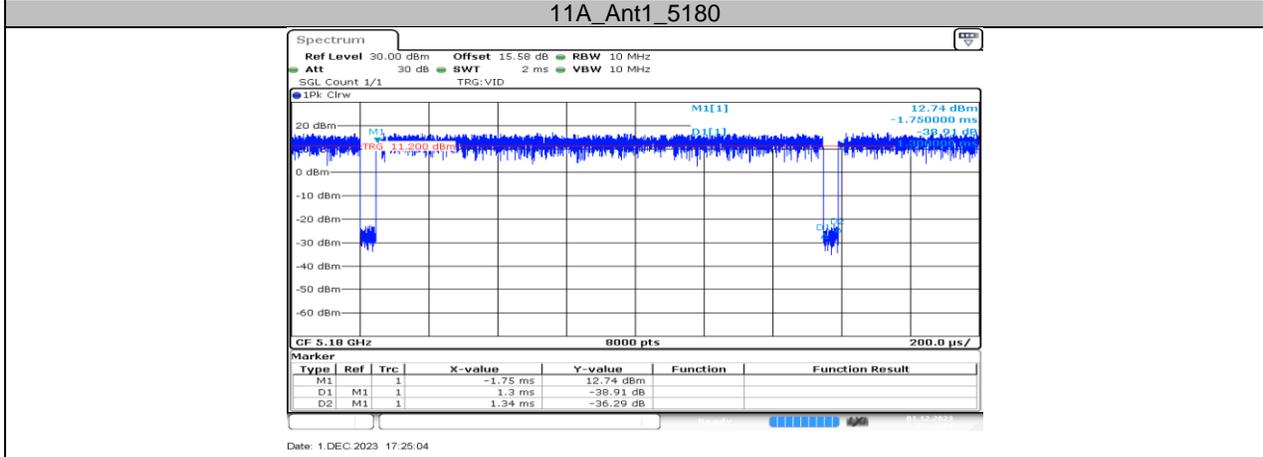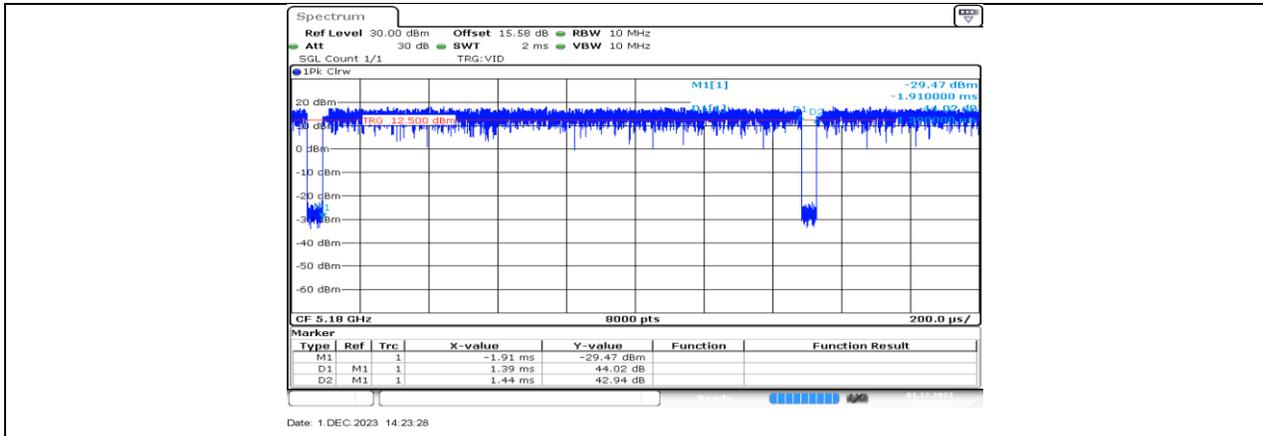

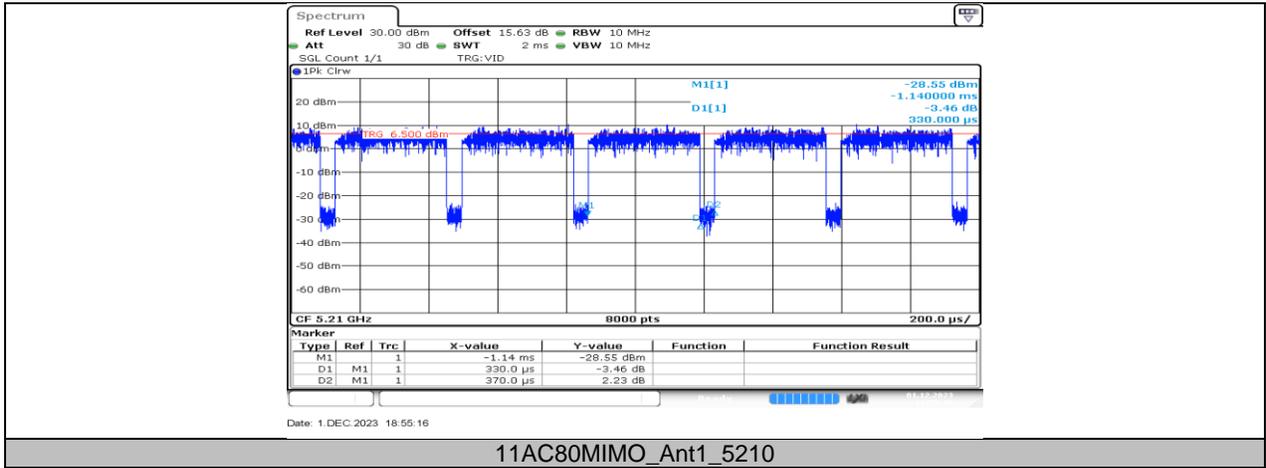

11.8. APPENDIX H: CALIBRATION


Mode	Frequency (MHz)	Type	Result	Verdict
ac80	5530	DFS_FCC_T0	See test Graph	Pass

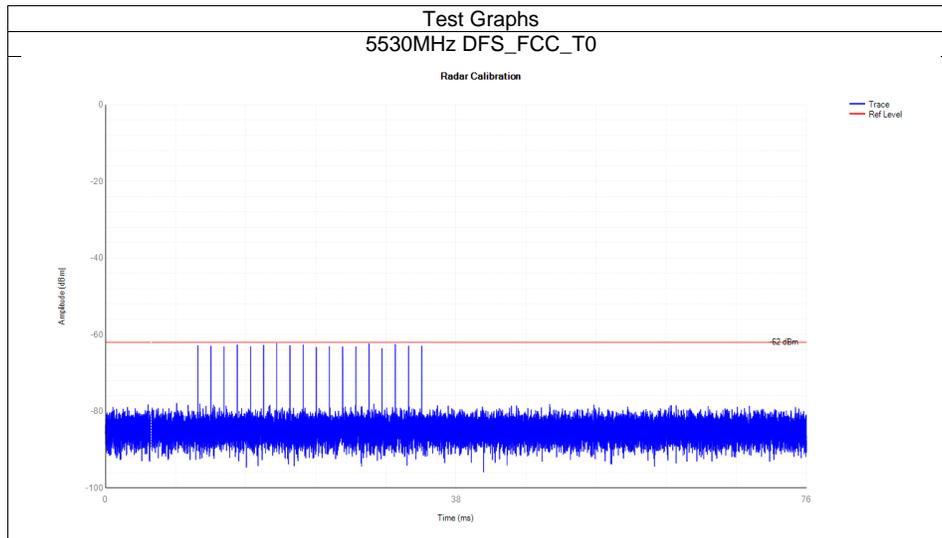

11.9. APPENDIX I: SHUTDOWN TIME

Mode	Frequency (MHz)	Channel Move Time (s)	Limit Channel Move Time (s)	Close Transmission Time (s)	Limit Close Transmission Time (s)	Close Transmission Time after 200ms(s)	Limit Close Transmission Time after 200ms (s)	Verdict
ac80	5530	0.504	10	0.013	0.26	0.006	0.06	Pass


Note: Refer to KDB905462 table 2, only the widest BW mode data recorded in the report.

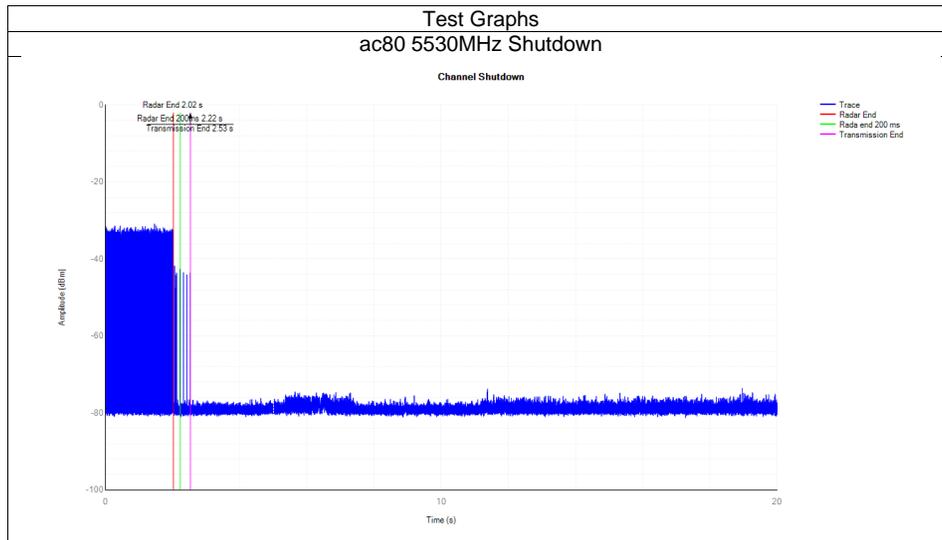

11.10. APPENDIX J: NON-OCCUPANCY

Mode	Frequency (MHz)	Result	Verdict
ac80	5530	See test Graph	Pass

Note: Refer to KDB905462 table 2, only the widest BW mode data recorded in the report.

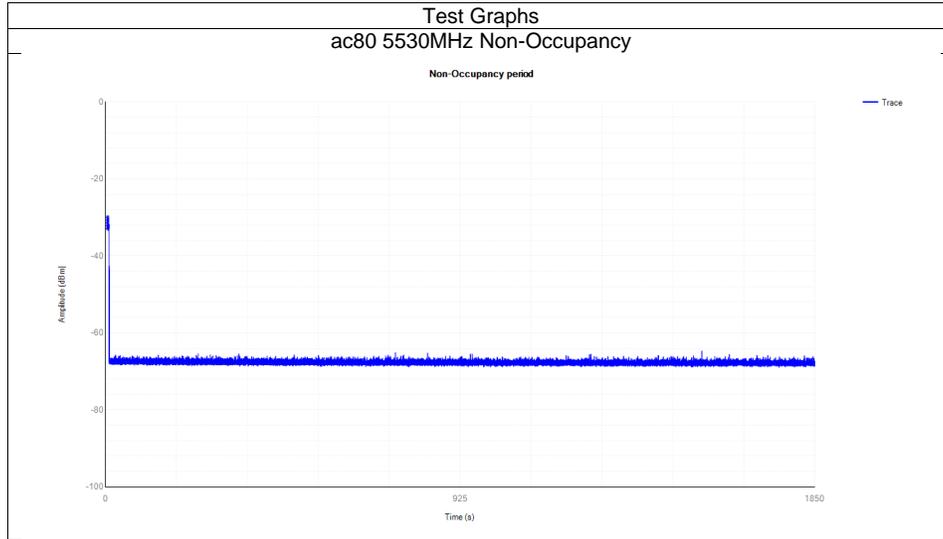

END OF REPORT